



Helping Customers Innovate, Improve & Grow



VS-401

Description

The VS-401 VCSO (Voltage Controlled Saw Oscillator) from Vectron is a high frequency, ultra low phase noise oscillator designed to support high speed data converters and 100G coherent optical receivers. The VS-401 provides 12fs rms jitter in the 12kHz to 20MHz integration bandwidth and is available from 1.3GHz to 2.1GHz.

Features

- Frequency Range 1.3 to 2.1 GHz
- Ultra low jitter performance
- Typical Jitter: 12fsec rms, 12kHz to 20MHz
- 5V supply voltage
- Output sinewave + balanced sinewave
- 13x20 mm SMD package
- See table on Page 5 for standard frequencies

Applications

- High Speed ADCs
- 40G & 100G Coherent Receivers
- Test & Measurement

Performance Specifications

Pulling Characteristics					
Parameter	Min	Typ	Max	Units	Notes
Absolute Pull Range (APR)	±20				Includes df vs: •Operating temperature range +10 .. 85°C •Aging 10 years •Supply Voltage Change 5% •Load change 10%
Tuning Slope	Positive				
Control Voltage Range	0.5	2.5	4.5	V DC	with $V_s = 5V$
Frequency control input impedance	10			kΩ	
Supply Voltage (V_s)					
Supply voltage (standard)	4.75	5.00	5.25	V DC	
Current consumption			150	mA	@ Sinewave / Balanced Sinewave

Performance Specifications (Continued)


RF Output					
Parameter	Min	Typ	Max	Units	Notes
Signal	Sinewave				
Load	45	50	55	Ω	
Output Power	7	8.5	12	dBm	
Signal	Balanced Sinewave				
Load	45	50	55	Ω	
Output Power	0	3	6	dBm	
Phase difference between output signal pairs			± 10	$^{\circ}$	
Phase Noise: 100Hz offset		-75		dBc/Hz	@ 1.75GHz Sinewave 5V
Phase Noise: 1kHz offset		-101		dBc/Hz	
Phase Noise: 10kHz offset		-129		dBc/Hz	
Phase Noise: 100kHz offset		-146		dBc/Hz	
Phase Noise: 1MHz offset		-155		dBc/Hz	
Phase Noise: 10MHz offset		-160		dBc/Hz	
Jitter: 12kHz to 20MHz offset		12		fs rms	
Phase Noise: 100Hz offset		-62		dBc/Hz	@ 1.97GHz Sinewave 5V
Phase Noise: 1kHz offset		-90		dBc/Hz	
Phase Noise: 10kHz offset		-118		dBc/Hz	
Phase Noise: 100kHz offset		-139		dBc/Hz	
Phase Noise: 1MHz offset		-151		dBc/Hz	
Phase Noise 10MHz offset		-158		dBc/Hz	
Jitter: 12kHz to 20MHz offset		14		fs rms	
Subharmonics			-30	dBc	For > 1.8GHz

Additional Parameters					
Weight	2.0g				
Processing and Packing	Handling and Processing Note				
Absolute Maximum Ratings					
Parameter	Min		Max	Units	Notes
Supply Voltage (V _s)			6.0	V	
Operating Temperature Range	-40		+85	°C	
Storage Temperature Range	-55		+125	°C	

Typical Performance


Phase Noise

VS-401 @ 1.75GHz Sinewave

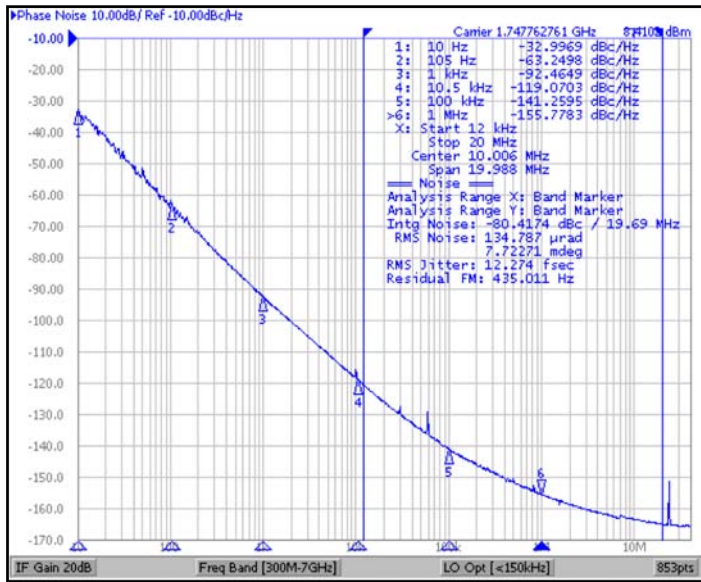

Phase Noise

VS-401 @ 1.97GHz Sinewave

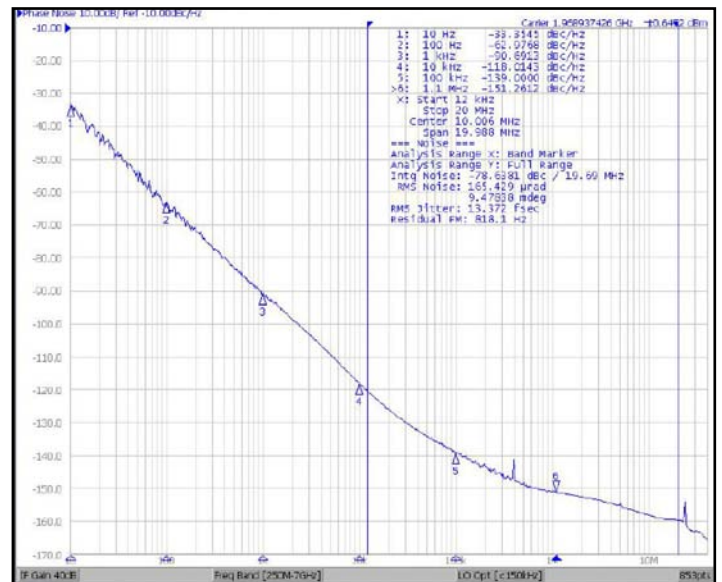



Outline Drawing / Enclosure

Package Codes

Code	Height "H"	Pin Length "L"
G239	5.9	NA

Dimensions in mm

G 239

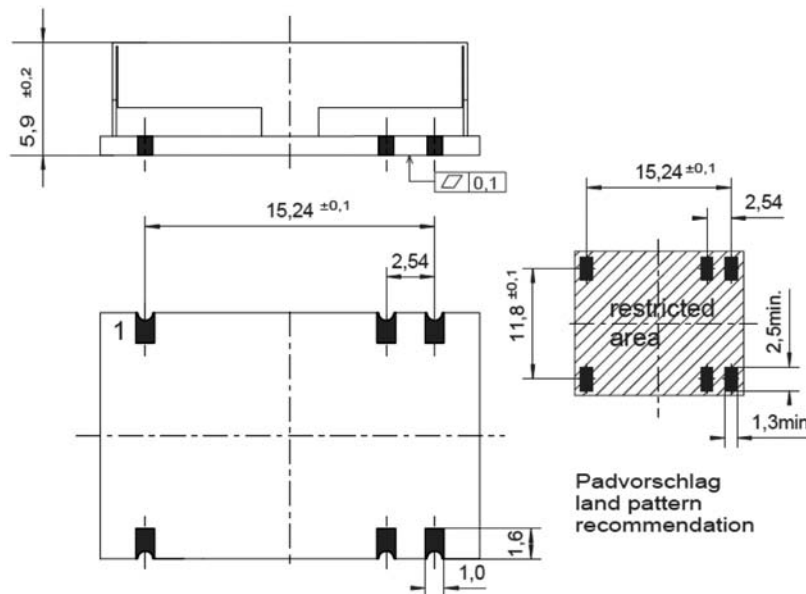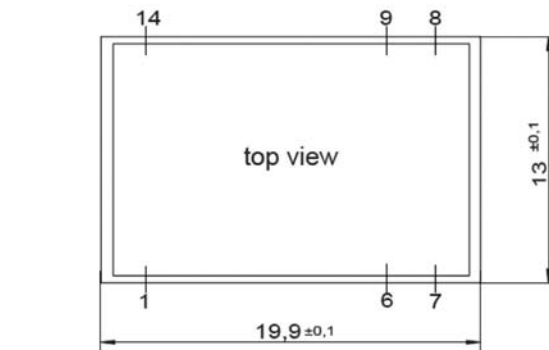


Pin Assignment

1	Control Voltage (V_C)
6	GND
7	GND
8	RF Out
9	GND (Sinewave) RF Out compl. (Balanced Sinewave)
14	Supply Voltage Input (V_S)

Marking


VS-401-xxxx
Frequency
•AyyyWW

Standard Shipping Method

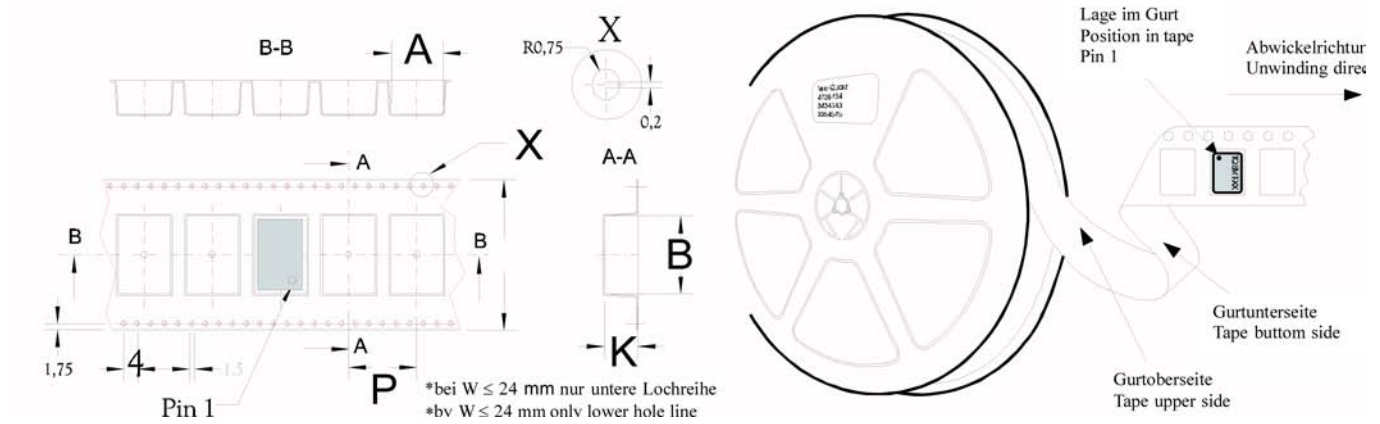

Enclosure Type	Tape Width W (mm)	Quantity per meter	Quantity per reel	Dimension P
G239	24		500	12


Recommended Reflow Profile

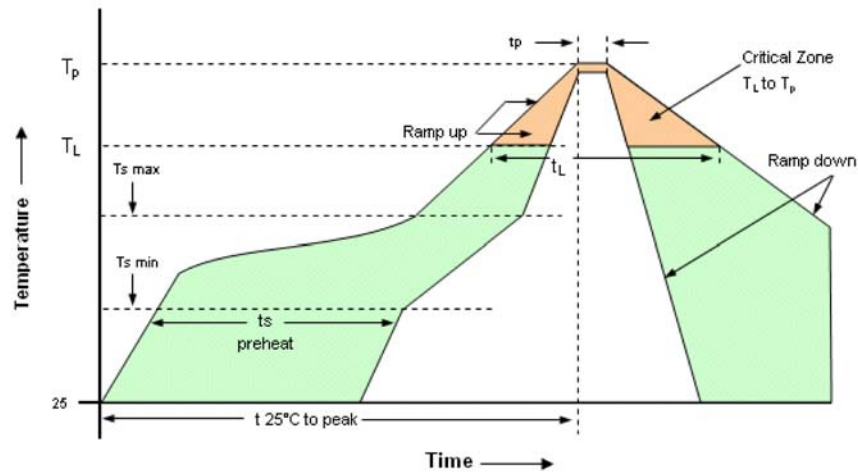

Profile Feature	Pb-Free Assembly/Sn-Pb Assembly	Profile Feature	Pb-Free Assembly/Sn-Pb Assembly
Average ramp-up rate (T_L to T_p)	3°C/second max.	Time 25°C to Peak Temperature	8 minutes max.
Preheat - Temperature Min T_{smin} -Temperature Min T_{sma} -Time (min to max) t_s	150°C 200°C 60-180 seconds	Time maintained above -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds
T_{smax} to T_L -Ramp-up Rate	3°C/second max		
Time maintained above -Temperature (T_L) -Time (t_L)	217°C 60-150 seconds	Time within 5°C of actual Peak- Temperature (t_p)	20-40 seconds
Peak Temperature (T_p)	max 260°C	Ramp-down Rate	6°C/ second max

Ordering Information

VS - 401 0 - D E X - 205 X - 1747M03083

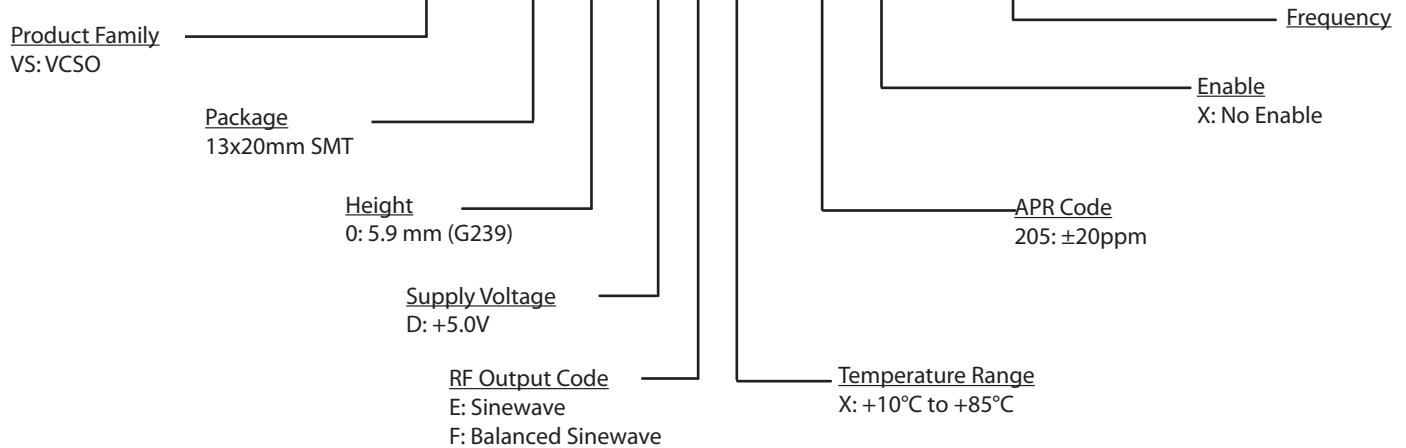

Standard Frequencies (MHz)						
1701.32	1707.08	1747.030837	1747.62305	1748.366885	1748.793733	1769.145
1769.18	1968.75	1980.022	1986.819383	2031.25		

Other Frequencies Available Upon Request

Notes:

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 3328.4784.17
Fax: +49 (0) 3328.4784.30

Asia:

Vectron International
1F-2F, No 8 Workshop, No 308 Fenju Road
WaiGaoQiao Free Trade Zone
Pudong, Shanghai, China 200131
Tel: 86.21.5048.0777
Fax: 86.21.5048.1881

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 06/2011