





ONE HOLE HYLUG™ CODE CONDUCTOR LONG BARREL WITH INSPECTION WINDOW

TYPE YAZ

UNINSULATED COPPER
COMPRESSION TERMINAL

UL LISTED 90°C,
600 VOLT TO 35 KV ♦

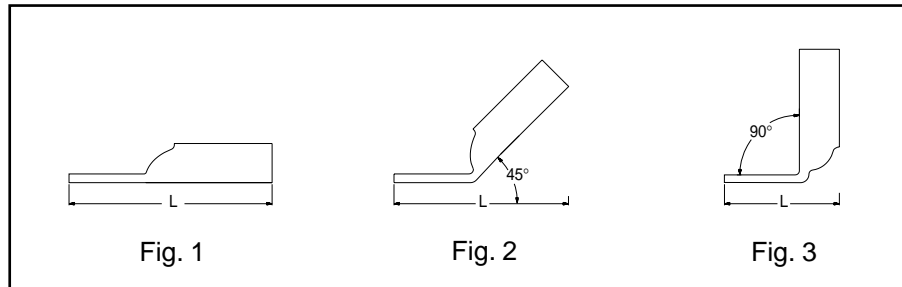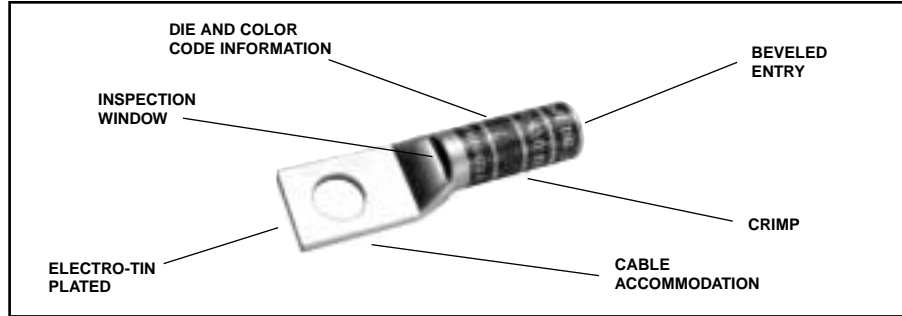

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Length (L)	Tongue Angle	Installation Tooling						WIRE STRIP LENGTH															
		AWG	*** MM²					Mechanical			Hydraulic		COLOR CODE		DIE INDEX														
								Y1MRTC Y2MR	MD7-34R	BCT500 Y500CT	Y750-2/Y46C* BAT-750C																		
YAZV10-TC14	1	#14 - 10 Str	6	1/4"	.41"	1.54	Straight	-	-	-	-	-	-	3/4"															
YAZV10-TC14-45	2					1.41	45 Degree																						
YAZV10-TC14-90	3	#12 - 10 Sol				0.83	90 Degree																						
YAZ8C-TC10	1	#8 AWG #8 WELD 37/24 #6 SOL	10	#10	.41"	1.58	Straight	Y2MR (2) Y1MRTC (2)	W8CVT (2) W8CRT (2) X8CRT (2)	W8CVT (2) W8CRT (2) X8CRT (2)	U8CRT (2)	Red	49	7/8"															
YAZ8C-TC10-45	2					1.47	45 Degree																						
YAZ8C-TC10-90	3					0.75	90 Degree																						
YAZ8C-TC14	1				1/4"	.44"	1.71								Straight	Y2MR (2) Y1MRTC (2)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	U5CRT (2) U8CART (2)	Blue	7 or 374	1-3/16"							
YAZ8C-TC14-45	2			1.58			45 Degree																						
YAZ8C-TC14-90	3			0.87			90 Degree																						
YAZ8C-TC38	1				1/4"	.58"	1.89								Straight								Y2MR (2) Y1MRTC (2)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	U5CRT (2) U8CART (2)	Blue	7 or 374	1-3/16"
YAZ8C-TC38-45	2			1.72			45 Degree																						
YAZ8C-TC38-90	3			1.05			90 Degree																						
YAZ6C-TC14	1	#6 AWG	16	1/4"	.45"	2.03	Straight	Y2MR (2) Y1MRTC (2)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	U5CRT (2) U8CART (2)	Blue	7 or 374	1-3/16"															
YAZ6C-TC14-45	2					1.83	45 Degree																						
YAZ6C-TC14-90	3					0.89	90 Degree																						
YAZ6C-TC38	1				3/8"	.58"	2.22								Straight	Y2MR (2) Y1MRTC (2)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	W5CVT (2) W5CRT (2) X5CRT (2) X8CART (2)	U5CRT (2) U8CART (2)	Blue	7 or 374	1-3/16"							
YAZ6C-TC38-45	2			1.97			45 Degree																						
YAZ6C-TC38-90	3			1.06			90 Degree																						
YAZ6C-TC12	1				1/2"	.83"	2.65								Straight								Y2MR (2) Y1MRTC (2)	W5CVT (2) W5CRT (2) X5CRT (2)	W5CVT (2) W5CRT (2) X5CRT (2)	U5CRT (2)	Blue	7 or 374	1-3/16"
YAZ6C-TC12-45	2			2.54			45 Degree																						
YAZ6C-TC12-90	3			1.53			90 Degree																						
YAZ5C-TC12	1	#5 AWG	-	1/2"	.83"	2.68	Straight	Y2MR (2) Y1MRTC (2)	W5CVT (2) W5CRT (2) X5CRT (2)	W5CVT (2) W5CRT (2) X5CRT (2)	U5CRT (2)	Blue	7 or 374	1-3/16"															
YAZ5C-TC12-45	2					2.56	45 Degree																						
YAZ5C-TC12-90	3					1.53	90 Degree																						
YAZ4C-TC14	1	#4 AWG	-	1/4"	.49"	2.05	Straight								Y2MR (4) Y1MRTC (4)	W4CVT (2) W4CRT (2) X4CRT (2)	W4CVT (2) W4CRT (2) X4CRT (2)	U4CRT (2) U6CART (2)	Gray	8 or 346	1-3/16"								
YAZ4C-TC14-45	2					1.87	45 Degree																						
YAZ4C-TC14-90	3					0.92	90 Degree																						
YAZ4C-TC38	1				3/8"	.58"	2.23															Straight	Y2MR (4) Y1MRTC (4)	W4CVT (2) W4CRT (2) X4CRT (2)	W4CVT (2) W4CRT (2) X4CRT (2)	U4CRT (2) U6CART (2)	Gray	8 or 346	1-3/16"
YAZ4C-TC38-45	2			2.01			45 Degree																						
YAZ4C-TC38-90	3			1.09			90 Degree																						
YAZ4C-TC12	1				1/2"	.83"	2.67	Straight	Y2MR (4) Y1MRTC (4)	W4CVT (2) W4CRT (2) X4CRT (2)	W4CVT (2) W4CRT (2) X4CRT (2)	U4CRT (2) U6CART (2)	Gray	8 or 346								1-3/16"							
YAZ4C-TC12-45	2			2.55			45 Degree																						
YAZ4C-TC12-90	3			1.55			90 Degree																						


* Use P-UADP-1 adapter with "U" dies in Y46 HYPRESS™.
 ** P-RT die sets for use in Y46 HYPRESS™ only, P-UADP-1 adapter not required.
 *** The MM² conductor sizes listed are the recommendations for Class 2 conductor.

• Available undrilled. Add suffix "U" to catalog number. (Example: YA25U).
 ▲ See tooling section of this catalog for complete tool and die listings.

♦ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.



ONE HOLE HYLUG™ CODE CONDUCTOR LONG BARREL WITH INSPECTION WINDOW (CONTINUED)

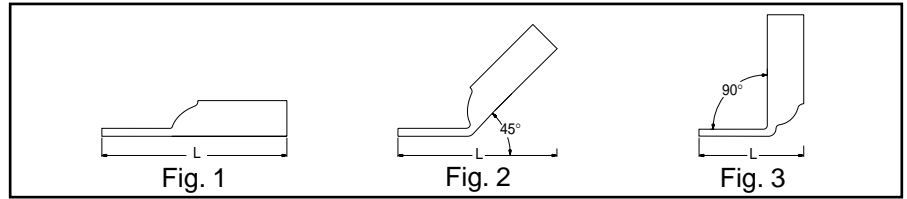

Catalog Number	FIG #	Conductor		Stud Hole Size	Tongue Width	Length (L)	Tongue Angle	Installation Tooling						WIRE STRIP LENGTH																
		AWG	*** MM²					Mechanical		Hydraulic		COLOR CODE	DIE INDEX																	
								Y1MRTC Y2MR	MD7-34R	BCT500 Y500CT	Y750-2/Y46C* BAT-750C																			
YAZ3C-TC14	1	#3 AWG	25	1/4"	.55"	2.21	Straight	Y1MRTC (4)	W3CRT (2)	W3CRT (2)	U3CRT (2)	White	9	1-5/16"																
YAZ3C-TC14-45	2					1.97	45 Degree																							
YAZ3C-TC14-90	3					0.93	90 Degree																							
YAZ3C-TC38	1			#2 SOL	3/8"	.58"	2.39								Straight	Y1MRTC (4)	W3CRT (2)	W3CRT (2)	U3CRT (2)	White	9	1-5/16"								
YAZ3C-TC38-45	2						2.13								45 Degree															
YAZ3C-TC38-90	3						1.11								90 Degree															
YAZ3C-TC12	1					1/2"	.83"								2.83								Straight	Y1MRTC (4)	W3CRT (2)	W3CRT (2)	U3CRT (2)	White	9	1-5/16"
YAZ3C-TC12-45	2														2.66								45 Degree							
YAZ3C-TC12-90	3														1.57								90 Degree							
YAZ2C-TC14	1	#2 AWG	35	1/4"	.60"	2.23	Straight	Y2MR (4) Y1MRTC (4)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-5/16"																
YAZ2C-TC14-45	2					2.03	45 Degree																							
YAZ2C-TC14-90	3					0.96	90 Degree																							
YAZ2C-TC38	1			3/8"	.60"	2.41	Straight								Y2MR (4) Y1MRTC (4)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-5/16"									
YAZ2C-TC38-45	2					2.21	45 Degree																							
YAZ2C-TC38-90	3					1.14	90 Degree																							
YAZ2C-TC12	1					1/2"	.83"															2.85	Straight	Y2MR (4) Y1MRTC (4)	W2CVT (2) W2CRT (2) X2CRT (2)	W2CVT (2) W2CRT (2) X2CRT (2)	U2CRT (2)	Brown	10	1-5/16"
YAZ2C-TC12-45	2																					2.57	45 Degree							
YAZ2C-TC12-90	3																					1.57	90 Degree							
YAZ1C-TC14	1	#1 AWG	50	1/4"	.67"	2.39	Straight	Y1MRTC (4)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	U1CRT-1 (2) U4CABT (2)	Green	11 or 375	1-7/16"																
YAZ1C-TC14-45	2					2.13	45 Degree																							
YAZ1C-TC14-90	3					0.98	90 Degree																							
YAZ1C-TC38	1			3/8"	.67"	2.57	Straight								Y1MRTC (4)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	U1CRT-1 (2) U4CABT (2)	Green	11 or 375	1-7/16"									
YAZ1C-TC38-45	2					2.31	45 Degree																							
YAZ1C-TC38-90	3					1.16	90 Degree																							
YAZ1C-TC12	1					1/2"	.83"															3.01	Straight	Y1MRTC (4)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	W1CVT (2) W1CRT-1 (2) X1CRT-1 (2)	U1CRT-1 (2) U4CABT (2)	Green	11 or 375	1-7/16"
YAZ1C-TC12-45	2																					2.70	45 Degree							
YAZ1C-TC12-90	3																					1.59	90 Degree							
YAZ25-TC14	1	1/0 AWG	-	1/4"	.75"	2.42	Straight	-	W25VT (4) W25RT (4) X25RT (4)	W25VT (4) W25RT (4) X25RT (4)	U25RT (2) U2CABT (2)	Pink	12 or 348	1-7/16"																
YAZ25-TC14-45	2					2.19	45 Degree																							
YAZ25-TC14-90	3					1.02	90 Degree																							
YAZ25-TC516	1			5/16"	.75"	2.47	Straight								-	W25VT (4) W25RT (4) X25RT (4)	W25VT (4) W25RT (4) X25RT (4)	U25RT (2) U2CABT (2)	Pink	12 or 348	1-7/16"									
YAZ25-TC516-45	2					2.24	45 Degree																							
YAZ25-TC516-90	3					1.08	90 Degree																							
YAZ25-TC38	1					3/8"	.75"															2.60	Straight	-	W25VT (4) W25RT (4) X25RT (4)	W25VT (4) W25RT (4) X25RT (4)	U25RT (2) U2CABT (2)	Pink	12 or 348	1-7/16"
YAZ25-TC38-45	2																					2.37	45 Degree							
YAZ25-TC38-90	3																					1.20	90 Degree							
YAZ25-TC12	1	1/2"	.83"	3.04	Straight	-	W25VT (4) W25RT (4) X25RT (4)	W25VT (4) W25RT (4) X25RT (4)	U25RT (2) U2CABT (2)	Pink	12 or 348	1-7/16"																		
YAZ25-TC12-45	2			2.77	45 Degree																									
YAZ25-TC12-90	3			1.63	90 Degree																									
YAZ26-TC14	1	2/0 AWG	70	1/4"	.83"	2.58	Straight	-	W26VT (4) W26RT (4) X26RT (4)	W26VT (4) W26RT (4) X26RT (4)	U26RT (2)	Black	13	1-9/16"																
YAZ26-TC14-45	2					2.30	45 Degree																							
YAZ26-TC14-90	3					1.04	90 Degree																							
YAZ26-TC38	1			3/8"	.83"	2.76	Straight								-	W26VT (4) W26RT (4) X26RT (4)	W26VT (4) W26RT (4) X26RT (4)	U26RT (2)	Black	13	1-9/16"									
YAZ26-TC38-45	2					2.48	45 Degree																							
YAZ26-TC38-90	3					1.22	90 Degree																							
YAZ26-TC12	1					1/2"	.83"															3.20	Straight	-	W26VT (4) W26RT (4) X26RT (4)	W26VT (4) W26RT (4) X26RT (4)	U26RT (2)	Black	13	1-9/16"
YAZ26-TC12-45	2																					2.92	45 Degree							
YAZ26-TC12-90	3																					1.66	90 Degree							
YAZ27-TC38	1	3/0 AWG	95	3/8"	.90"	2.80	Straight	-	W27RT (4) W27VT (4) X27RT (6)	W27VT (4) W27RT (4) X27RT (6)	U27RT (2)	Orange	14	1-9/16"																
YAZ27-TC38-45	2					2.52	45 Degree																							
YAZ27-TC38-90	3					1.25	90 Degree																							


* Use P-UADP-1 adapter with "U" dies in Y46 HYPRESS™.
 ** P-RT die sets for use in Y46 HYPRESS™ only, P-UADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.
 • Available undrilled. Add suffix "U" to catalog number. (Example: YA25U).

▲ See tooling section of this catalog for complete tool and die listings.
 ◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.



ONE HOLE HYLUG™ CODE CONDUCTOR LONG BARREL WITH INSPECTION WINDOW (CONTINUED)

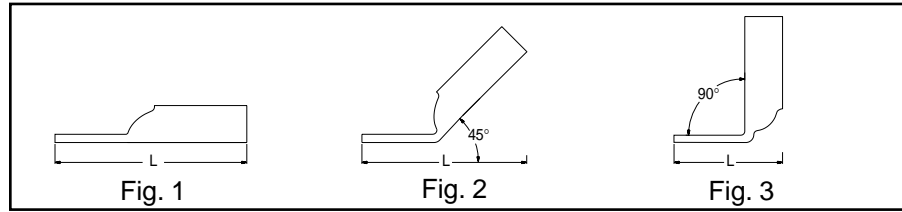


Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Length (L)	Tongue Angle	Installation Tooling				WIRE STRIP LENGTH		
		AWG	*** MMF					Mechanical		Hydraulic			COLOR CODE	DIE INDEX
								Y1MRTC Y2MR	MD7-34R	BCT500 Y500CT	Y750-2/Y46C* BAT-750C			
YAZ27-TC12	1	3/0 AWG	95	1/2"	.91"	3.23	Straight	-	W27RT (4) W27VT (4) X27RT (6)	W27RT (4) W27RT (4) X27RT (6)	U27RT (2)	Orange	14	1-9/16"
YAZ27-TC12-45	2					2.96	45 Degree							
YAZ27-TC12-90	3					1.69	90 Degree							
YAZ28-TC38	1	4/0 AWG	-	3/8"	1.02"	2.99	Straight	-	W28VT (4) W28RT (4) X28RT (6)	W28VT (4) W28RT (4) X28RT (6)	U28RT (2)	Purple	15	1-11/16"
YAZ28-TC38-45	2					2.69	45 Degree							
YAZ28-TC38-90	3					1.30	90 Degree							
YAZ28-TC12	1	-	-	1/2"	1.02"	3.40	Straight	-	W29VT (4) W29RT (4) X29RT (6)	W29VT (4) W29RT (4) X29RT (6)	U29RT (2)	Yellow	16	1-11/16"
YAZ28-TC12-45	2					3.11	45 Degree							
YAZ28-TC12-90	3					1.73	90 Degree							
YAZ29-TC38	1	250 kcmil	120	3/8"	1.10"	2.99	Straight	-	W30VT (4) W30RT (4) U28ART (4)	W30VT (4) W30RT (4)	U30RT (4) U28ART (4)	White	17 or 298	2-1/16"
YAZ29-TC38-45	2					2.73	45 Degree							
YAZ29-TC38-90	3					1.34	90 Degree							
YAZ29-TC12	1	-	-	1/2"	1.10"	3.43	Straight	-	W31VT (4) W31RT (4) U29ART (4)	W31VT (4) W31RT (4)	U31RT (4) U29ART (4)	Red	18 or 324	2-1/16"
YAZ29-TC12-45	2					3.17	45 Degree							
YAZ29-TC12-90	3					1.77	90 Degree							
YAZ30-TC38	1	300 kcmil	150	3/8"	1.20"	3.42	Straight	-	W32VT (4) W32RT (4) U30ART (4)	W32VT (4) W32RT (4)	U32RT (4) U30ART (4)	Blue	19 or 470	2-3/16"
YAZ30-TC38-45	2					3.04	45 Degree							
YAZ30-TC38-90	3					1.37	90 Degree							
YAZ30-TC12	1	-	-	1/2"	1.20"	3.85	Straight	-	W33VT (4) W33RT (4)	W33VT (4) W33RT (4)	U33RT (4)	Gray	326 or 538	2-5/16"
YAZ30-TC12-45	2					3.48	45 Degree							
YAZ30-TC12-90	3					1.81	90 Degree							
YAZ31-TC38	1	350 kcmil	185	3/8"	1.29"	3.45	Straight	-	W34VT (4) W34RT (4) U34ART (4)	W34VT (4) W34RT (4)	U34RT (4) U31ART (4)	Brown	20 or 299	2-5/16"
YAZ31-TC38-45	2					3.10	45 Degree							
YAZ31-TC38-90	3					1.41	90 Degree							
YAZ31-TC12	1	-	-	1/2"	1.29"	3.89	Straight	-	W35VT (4) W35RT (4)	W35VT (4) W35RT (4)	U35RT (4)	Yellow	21	2-11/16"
YAZ31-TC12-45	2					3.54	45 Degree							
YAZ31-TC12-90	3					1.85	90 Degree							
YAZ32-TC38	1	400 kcmil	-	3/8"	1.40"	3.62	Straight	-	W36RT (4) U36ART (4)	W36RT (4) U36ART (4)	U36RT (4)	Green	22 or 472	2/4"
YAZ32-TC38-45	2					3.25	45 Degree							
YAZ32-TC38-90	3					1.46	90 Degree							
YAZ32-TC12	1	-	-	1/2"	1.40"	4.06	Straight	-	-	-	-	-	-	-
YAZ32-TC12-45	2					3.69	45 Degree							
YAZ32-TC12-90	3					1.89	90 Degree							
YAZ33-TC12	1	450 kcmil	-	1/2"	1.48"	4.14	Straight	-	-	-	-	-	-	-
YAZ33-TC12-45	2					3.79	45 Degree							
YAZ33-TC12-90	3					1.95	90 Degree							
YAZ34-TC38	1	500 kcmil	240	3/8"	1.55"	3.85	Straight	-	-	-	-	-	-	-
YAZ34-TC38-45	2					3.50	45 Degree							
YAZ34-TC38-90	3					1.54	90 Degree							
YAZ34-TC12	1	-	-	1/2"	1.55"	4.29	Straight	-	-	-	-	-	-	-
YAZ34-TC12-45	2					3.94	45 Degree							
YAZ34-TC12-90	3					1.98	90 Degree							
YAZ35-TC12	1	550 kcmil	-	1/2"	1.65"	4.70	Straight	-	-	-	-	-	-	-
YAZ35-TC12-45	2					4.28	45 Degree							
YAZ35-TC12-90	3					2.02	90 Degree							
YAZ36-TC38	1	600 kcmil	300	3/8"	1.74"	4.55	Straight	-	-	-	-	-	-	-
YAZ36-TC38-45	2					4.14	45 Degree							
YAZ36-TC38-90	3					1.81	90 Degree							

▲ See tooling section of this catalog for complete tool and die listings.
 * Use P-UADP-1 adapter with "U" dies in Y46 HYPRESS™.
 ** P-RT die sets for use in Y46 HYPRESS™ only, P-UADP-1 adapter not required.
 *** The MMF conductor sizes listed are the recommendations for Class 2 conductor.
 ◆ Available undrilled. Add suffix "U" to catalog number. (Example: YA25U).
 ◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.



ONE HOLE HYLUG™ CODE CONDUCTOR LONG BARREL WITH INSPECTION WINDOW (CONTINUED)

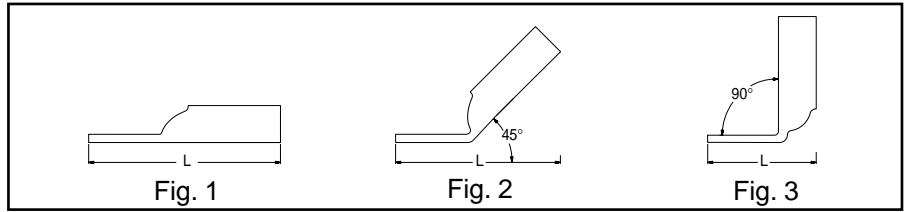

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Length (L)	Tongue Angle	Installation Tooling				COLOR CODE	DIE INDEX	WIRE STRIP LENGTH																			
		AWG	*** MM ²					Mechanical		Hydraulic																							
								Y1MRTC Y2MR	MD7-34R	BCT500 Y500CT	Y750-2/Y46C* BAT-750C																						
YAZ36-TC12	1	600 kcmil	300	1/2"	1.74"	4.80	Straight	-	-	-	U36RT (4)	Green	22 or 472	2/4"																			
YAZ36-TC12-45	2					4.39	45 Degree																										
YAZ36-TC12-90	3					2.06	90 Degree																										
YAZ37-TC12	1	650 kcmil	-	1/2"	1.80"	4.95	Straight	-	-	-	U37RT (4)	Orange	23	2-7/8"																			
YAZ37-TC12-45	2					4.51	45 Degree																										
YAZ37-TC12-90	3					2.09	90 Degree																										
YAZ38-TC12	1	700 kcmil	-	1/2"	1.84"	4.97	Straight	-	-	-	U38RT (4)	Pink	400	2-7/8"																			
YAZ38-TC12-45	2					4.51	45 Degree																										
YAZ38-TC12-90	3					2.09	Straight																										
YAZ39-TC38	1	750 kcmil	375	3/8"	1.91"	4.82	Straight	-	-	-	U39RT (4) P39RT (4) **	Black	24	2-15/16"																			
YAZ39-TC38-45	2					4.34	45 Degree																										
YAZ39-TC38-90	3					1.87	90 Degree																										
YAZ39-TC12	1			1/2"	1.91"	5.07	Straight								-	-	-	-	-	-	24	2-15/16"											
YAZ39-TC12-45	2																						4.59	45 Degree									
YAZ39-TC12-90	3																						2.12	90 Degree									
YAZ39-TC12NT	1					5.07	Straight																-	-	-	-	-	-	-	24	2-15/16"		
YAZ39-TC12NT-45	2																															4.59	45 Degree
YAZ39-TC12NT-90	3																															2.12	90 Degree
YAZ40-TC12	1			800 kcmil	400	1/2"	1.98"								5.14	Straight	-	-	-	P40RT (4) **	Orange	25										3"	
YAZ40-TC12-45	2														4.71	45 Degree																	
YAZ40-TC12-90	3														2.16	90 Degree																	
YAZ41-TC12	1	850 kcmil	-	1/2"	2.01"	5.16	Straight	-	-	-	-	Gold	26	3"																			
YAZ41-TC12-45	2					4.73	45 Degree																										
YAZ41-TC12-90	3					2.18	90 Degree																										
YAZ44-TC38	1	1000 kcmil	500	3/8"	2.19"	5.09	Straight	-	-	-	P44RT (4) **	White	27	3-1/16"																			
YAZ44-TC38-45	2					4.66	45 Degree																										
YAZ44-TC38-90	3					2.02	90 Degree																										
YAZ44-TC12	1			1/2"	2.19"	5.33	Straight								-	-	-	-	-	27	3-1/16"												
YAZ44-TC12-45	2																					4.91	45 Degree										
YAZ44-TC12-90	3																					2.27	90 Degree										
YAZ45-TC12	1	1250 kcmil	-	1/2"	2.46"	5.63	Straight	-	-	-	P45RT (6) **	Yellow	29	3-1/4"																			
YAZ45-TC12-45	2					5.24	45 Degree																										
YAZ45-TC12-90	3					2.38	90 Degree																										
YAZ453-TC12	1	1300 kcmil	-	1/2"	2.53"	5.66	Straight	-	-	-	-	Orange	30	2-1/16"																			
YAZ453-TC12-45	2					5.28	45 Degree																										
YAZ453-TC12-90	3					2.41	90 Degree																										
YAZ46-TC12	1	1500 kcmil	800	1/2"	2.69"	5.73	Straight	-	-	-	P46RT (6) **	Green	31	3-5/16"																			
YAZ46-TC12-45	2					5.35	45 Degree																										
YAZ46-TC12-90	3					2.47	90 Degree																										
YAZ47-TC12	1	1750 kcmil	-	1/2"	2.90"	6.07	Straight	-	-	-	-	Gray	33	3-1/2"																			
YAZ47-TC12-45	2					5.65	45 Degree																										
YAZ47-TC12-90	3					2.55	90 Degree																										
YAZ48-TC12	1	2000 kcmil	1000	1/2"	3.10"	6.14	Straight	-	-	-	-	Brown	34	3-1/2"																			
YAZ48-TC12-45	2					5.79	45 Degree																										
YAZ48-TC12-90	3					2.65	90 Degree																										

▲ See tooling section of this catalog for complete tool and die listings.
 * Use P-UADP-1 adapter with "U" dies in Y46 HYPRESS™.
 ** P-RT die sets for use in Y46 HYPRESS™ only, P-UADP-1 adapter not required.
 *** The MM² conductor sizes listed are the recommendations for Class 2 conductor.
 • Available undrilled. Add suffix "U" to catalog number. (Example: YA25U).
 ◆ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.