







NUMBER 178314



METRIC

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST

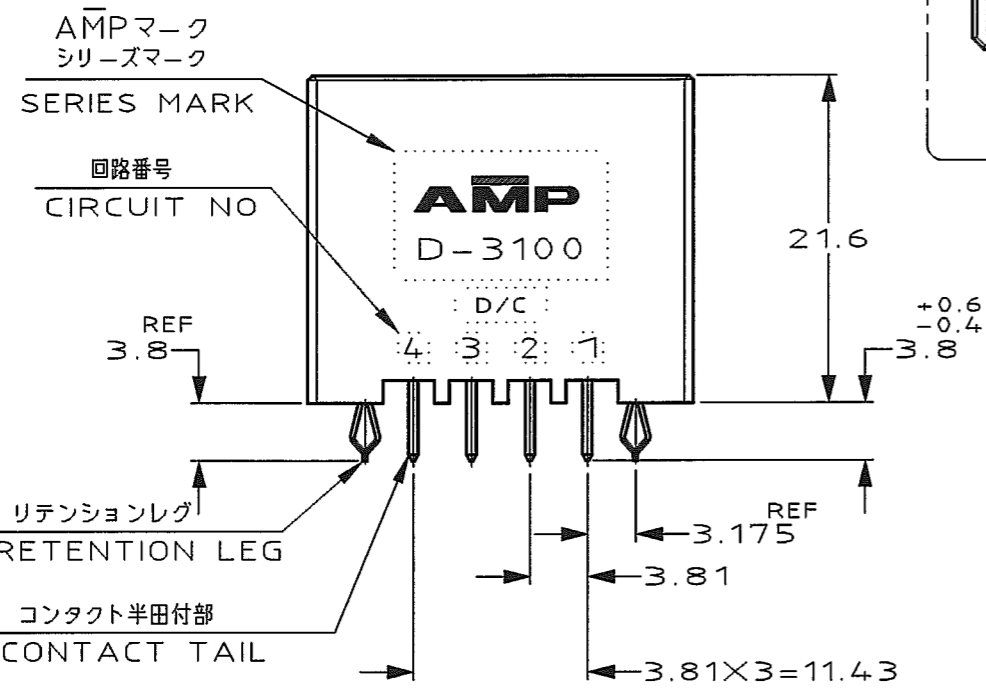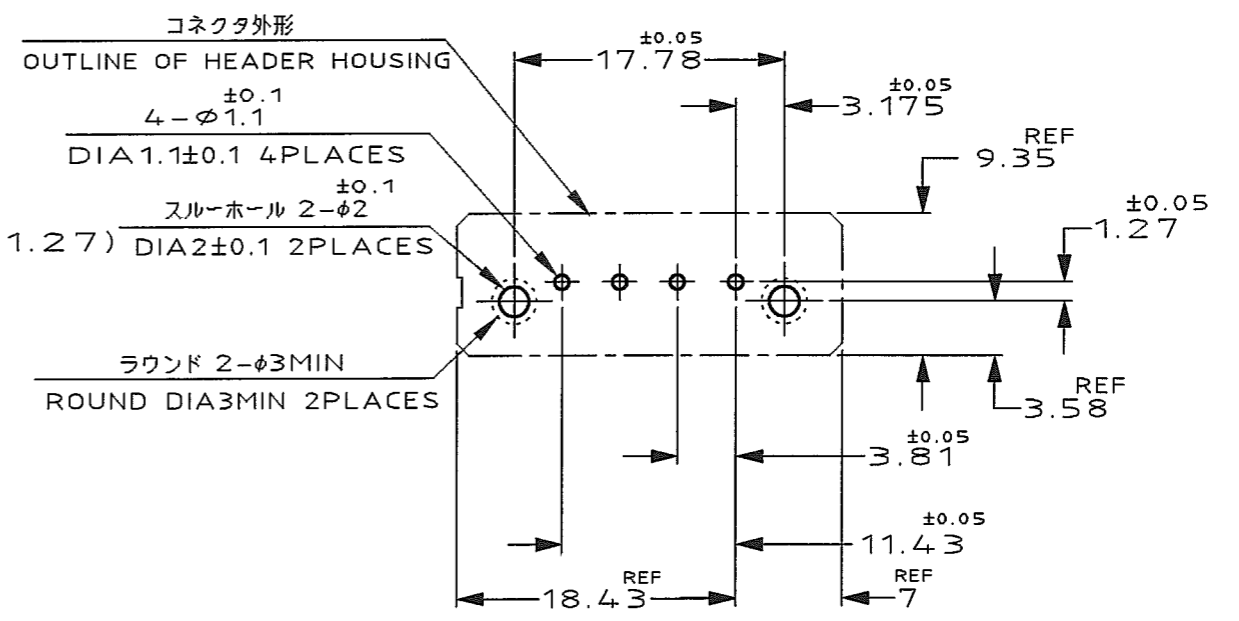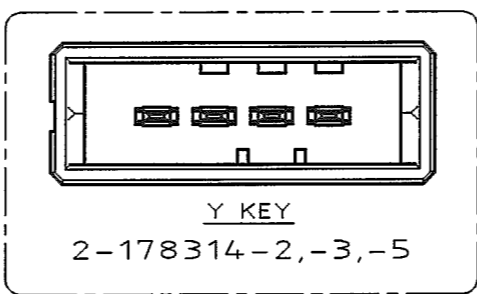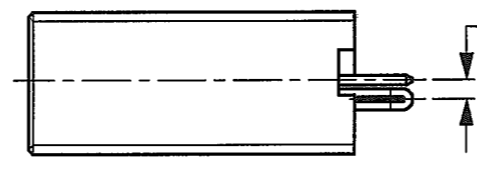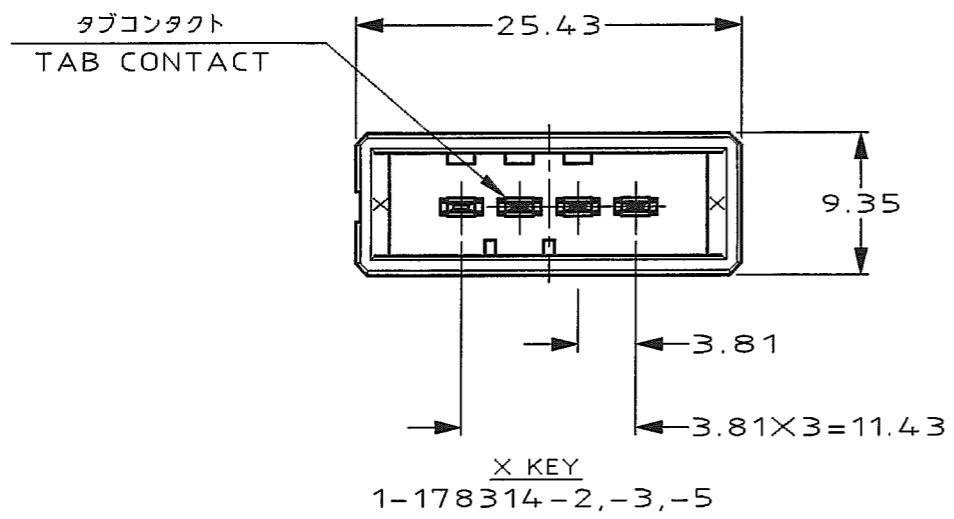

NOTES

- MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC, POLYESTER
CONTACT: COPPER ALLOY
RETENTION LEG: COPPER ALLOY
- FINISH (CONTACT AREA): 0.38 μm MIN GOLD PLATING OVER Ni PLATING
- FINISH (CONTACT AREA): 0.76 μm MIN GOLD PLATING OVER Ni PLATING
- FINISH (CONTACT AREA): 2.0 μm MIN TIN PLATED OVER NICKEL
- FINISH (RETENTION LEG): TIN-LEAD PLATED (CONTACT TAIL) OVER NICKEL
- FINISH (RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

注記

- 材料: ハウジング: ガラス入り熱可塑性ポリエステル樹脂
コンタクト: 銅合金
リテンションレグ: 銅合金
- めっき: コンタクト: 全面Ni下地
接触部: 0.38 μm MIN 金めっき
- めっき: コンタクト: 全面Ni下地
接触部: 0.76 μm MIN 金めっき
- めっき: コンタクト: 全面Ni下地
接触部: 2.0 μm MIN スズめっき
- めっき: リテンションレグとコンタクト半田付部
ニッケル下地の上に半田めっき
- めっき: リテンションレグとコンタクト半田付部
ニッケル下地の上にスズめっき

△6	△4	1,2-178314-5
△6	△3	1,2-178314-3
△6	△2	1,2-178314-2
(FINISH)		製品番号 (PART NO.)

C	REVISED (FJD0-0039-03)	TS	SM	6/2 '05
B	REVISED (FJD0-0114-03)	TS	SM	25.APR '03
A	REVISED (FJ00-2183-95)	KI	SM	3-23 '95
O	RELEASED (FJ00-1468-94)	KI	S.M	10/JAN '95
LTR	REVISION RECORD	DR	CHK	DATE

Copyright © 1994 AMP (Japan) LTD. ALL RIGHTS RESERVED.		Tyco Electronics AMP K.K. Kawasaki, Japan	
WIRE RANGE	INSULATION DIA	NAME	
mm (AWG)	mmφ	ダイナミック 3100 シリーズ 4極 ヘッダーアセンブリー (垂直タイプ) 4 POS SINGLE ROW VERTICAL HDR ASS'Y FOR DYNAMIC 3100	
MATERIAL	FINISH	一般公差 (GENERAL TOLERANCE)	
SEE NOTE 注記参照	SEE NOTE 注記参照	10mmF	±0.3
DR. 22/DEC/'94 K.IKEDA	DE. 22/DEC/'94 K.IKEDA	10mm 3mmF	±0.4
CHK. 10/JAN/'95 S.MANABE	APP. 10/JAN/'95 S.MANABE	30mm 100mmF	±0.45
		角度	±3'

SIZE	LOC	NUMBER
A3	J	178314
SCALE	REV.	SHEET
2-1	C	1 OF 1