


SPECIFICATIONS




Feature

- Low profile and small size*
- Magnetically shielded*
- Operating Temperature: -20°C to +130°C*
- Inductance: .20m H Min*
- DCR :0.995Ω Max.*
- Coil SPC.: Φ0.25 84Ts*

Applications
POWER SUPPLY

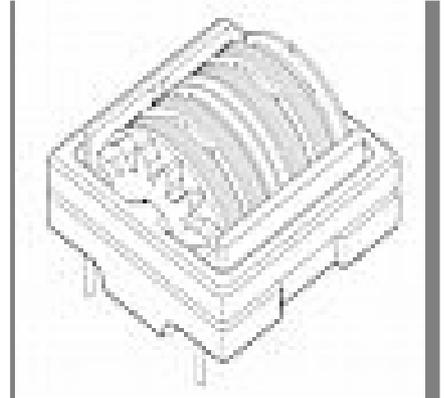

DRAWING

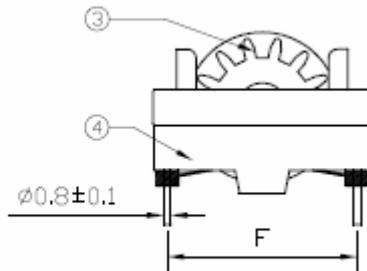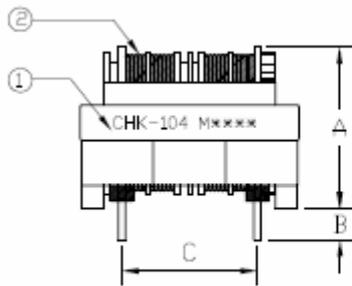

- UNIT:MM
- A=16,5MAX
 - B=3,5±0,5
 - C=14,0±0,3
 - D=22,0MAX
 - E=22,0MAX
 - F=17,0±0,3

ORDERING INFORMATION

