

● FEATURES

- TIGHT TOLERANCE AND STABILITY OVER TEMPERATURE
- WIDE FREQUENCY RANGE
- EXCELLENT FREQUENCY SOURCE FOR TELECOM APPLICATIONS


● SPECIFICATIONS

FREQUENCY RANGE		1.00 MHz TO 360.00 MHz
HOLDER TYPES	A-SMD: HC-49/U-SMD	1.00 MHz TO 360.00 MHz
	C-SMD: UM-1 SMD	10.00 MHz TO 300.00 MHz
FREQUENCY TOLERANCE AT 25° C		±5 PPM TO ±25 PPM
FREQUENCY STABILITY OVER TEMPERATURE RANGE		±3 PPM (-10°C TO +60°C) TO ±50 PPM (-55°C TO +125°C)
OPERATING TEMPERATURE RANGE		-55°C TO +125°C MAXIMUM
LOAD CAPACITANCE		10 pF TO 50 pF OR SERIES
AGING PER YEAR		±3 PPM MAXIMUM
MODE OF OSCILLATION		FUNDAMENTAL TO NINTH OVERTONE
EQUIVALENT SERIES RESISTANCE (ESR)		SEE PAGE 3
DRIVE LEVEL		0.1 uW TYPICAL




● OUTLINE DRAWINGS

A-SMD TYPE: HC-49/U-SMD

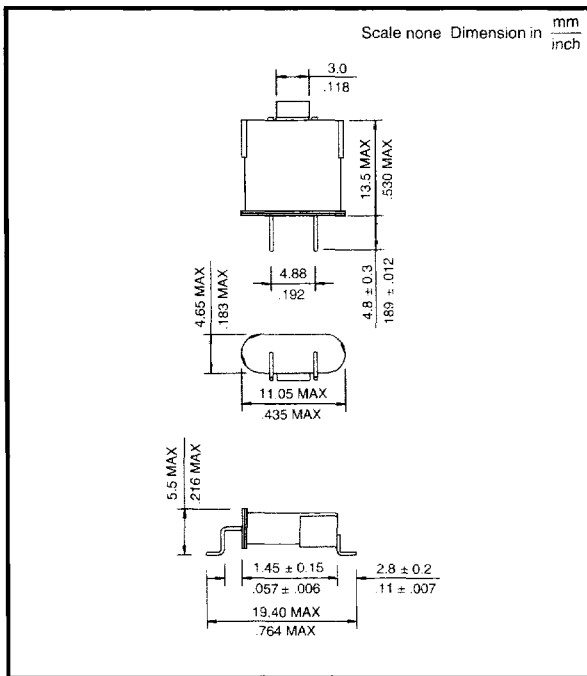

C-SMD TYPE: UM-1-SMD

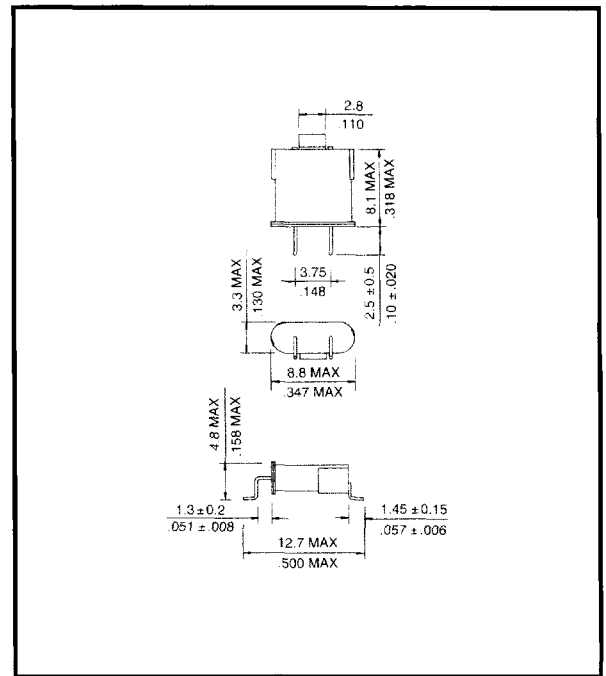

24

● PART NUMBERING SYSTEM

HOLDER TYPE		FREQUENCY	LOAD CAPACITANCE	MODE		EXTENDED TEMPERATURE	SURFACE MOUNT
A C	HC-49/U-SMD UM-1-SMD	IN MHz	10 TO 32pF FOR PARALLEL S FOR SERIES	FUND 3OT 5OT 7OT 9OT	FUNDAMENTAL THIRD OVERTONE FIFTH OVERTONE SEVENTH OVERTONE NINTH OVERTONE	EXT	SMD

EXAMPLE: A-32.000-20-3OT-SMD
C-100.00-S-5OT-SMD