
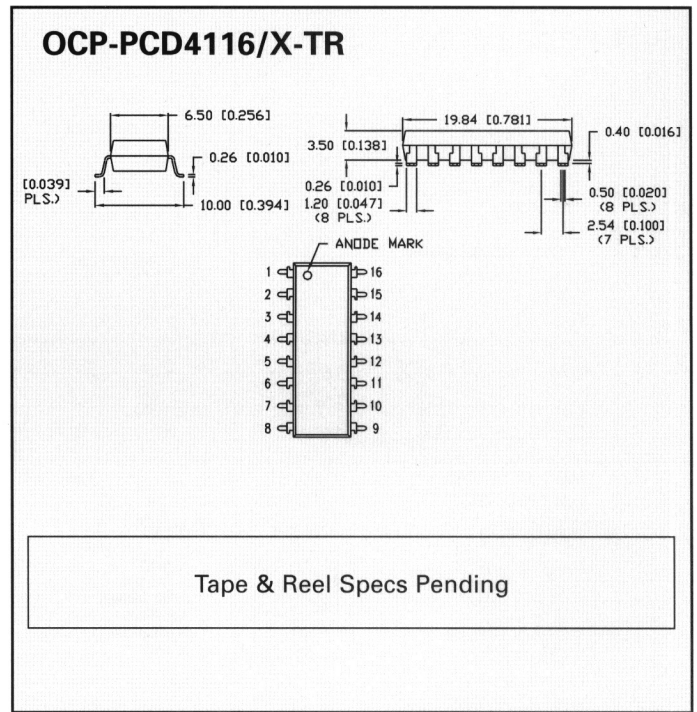
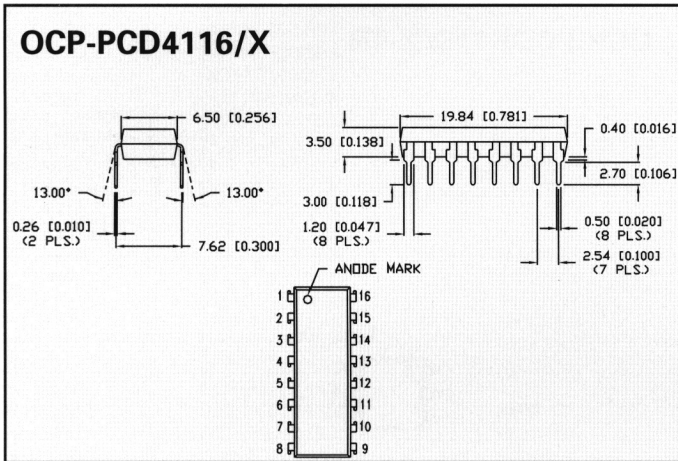
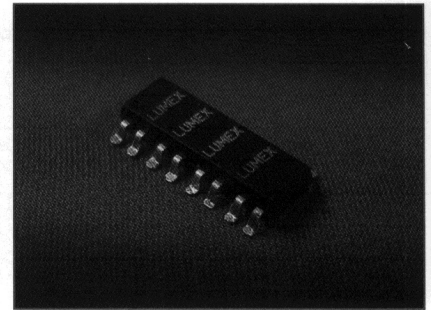



OCP-PCD4116 Package

Applications

- Alarms
- Telephones
- Medical Equipment

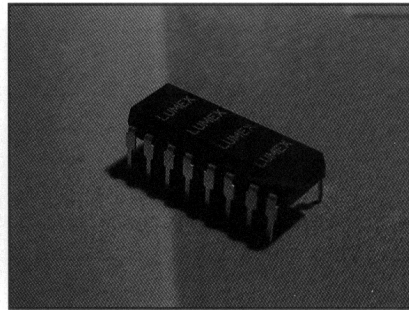

PART NUMBER TABLE	
PART= /X	CTR (%)
/A	600 TO 2000
/B	1500 TO 4000
/C	3000 TO 6000
/D	5000 TO 9000
/E	600 TO 9000



NOTES:
 1,3,5,7. ANODE
 2,4,6,8. CATHODE
 9,11,13,15. EMITTER
 10,12,14,16. COLLECTOR

ELECTRO-OPTICAL CHARACTERISTICS (T ₀ =25°C)						
PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
I FORWARD VOLTAGE	V _F	I _F =20mA	-	1.2	1.4	V
PEAK FORWARD VOLTAGE	V _{FM}	I _{FM} =0.5A	-	-	3.5	V
REVERSE CURRENT	I _R	V _R =4V	-	-	10	μA
TERMINAL CAPACITANCE	C _t	V=0, f=1kHz	-	30	-	pF
O COLLECTOR DARK CURRENT	I _{CEO}	V _{CE} =200V, I _F =0	-	-	10 ⁻⁶	A
T CURRENT TRANSFER RATIO	CRT	I _F =1mA, V _{CE} =2V	600	-	9000	%
COLLECTOR-EMITTER SATURATION VOLTAGE	V _{CE(sat)}	I _F =20mA, I _C =5mA	-	-	1.5	V
ISOLATION RESISTANCE	R _{iso}	DC500V	5x10 ¹⁰	-	-	ohm
FLOATING CAPACITANCE	C _f	V=0, f=1MHz	-	0.6	1.0	pF
CUT-OFF FREQUENCY	f _c	V _{CE} =5V, I _C =2mA, R _L =100ohm	-	7	-	kHz
RESPONSE TIME (RISE)	t _r	V _{CE} =2V, I _C =20mA, R _L =100ohm	-	60	300	μS
RESPONSE TIME (FALL)	t _f	V _{CE} =2V, I _C =20mA, R _L =100ohm	-	50	250	μS

I=INPUT, O=OUTPUT, T=TRANSFER CHARACTERISTICS.

ABSOLUTE MAXIMUM RATINGS (T ₀ =25°C)				
PARAMETER	SYMBOL	MAX	UNITS	
I FORWARD CURRENT	I _F	50	mA	
PEAK FORWARD CURRENT	I _{FM}	1	A	
REVERSE VOLTAGE	V _R	6	V	
POWER DISSIPATION	P _d	70	mW	
O COLLECTOR-EMITTER VOLTAGE	V _{CEO}	300	V	
EMITTER-COLLECTOR VOLTAGE	V _{ECO}	0.1	V	
COLLECTOR CURRENT	I _C	150	mA	
COLLECTOR POWER DISSIPATION	P _C	200	mW	
TOTAL POWER DISSIPATION	P _{tot}	200	mW	
ISOLATION VOLTAGE 1 MIN.	V _{iso}	5000	V _{RMS}	
OPERATING TEMP.	T _{opr}	- 30 TO + 100	°C	
STORAGE TEMP.	T _{stg}	- 55 TO + 125	°C	
SOLDERING TEMP.	T _{sol}	+ 260	°C	
2.0mm FROM BODY				10 SEC. MAX

I=INPUT, O=OUTPUT.

CAUTION: STATIC SENSITIVE DEVICE
 FOLLOW PROPER E.S.D. HANDLING PROCEDURES
 WHEN WORKING WITH THIS PART.

UL Listed Under FPQU2

1-800-278-5666

www.optolinks.com

1-800-944-2790