


## PHOTO INTERRUPTIVE ASSEMBLIES


### OED-SI3076-2T

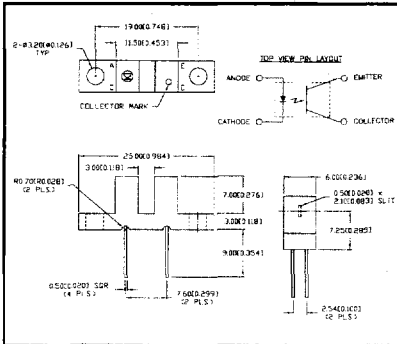

Package Style	Limits of Safe Operation			
	V <sub>R</sub> (V)	P <sub>D</sub> (mW)	I <sub>F</sub> (mA)	t <sub>opr</sub> (C°)
Slotted Holder + 2 Tabs	5.0	100	60	-20 ~ + 85

Input			Output		
V <sub>I</sub> @ 20mA	P <sub>O</sub> (mW)	I <sub>R</sub> (μA)	I <sub>L</sub> (μA)	I <sub>CEO</sub> (μA)	Type
1.5	3.0	10.0	1.0	0.1	Photo Transistor


### OED-SI3110

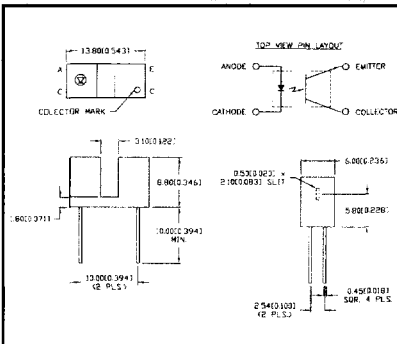

Package Style	Limits of Safe Operation			
	V <sub>R</sub> (V)	P <sub>D</sub> (mW)	I <sub>F</sub> (mA)	t <sub>opr</sub> (C°)
Slotted Holder	5.0	100	60	-20 ~ + 85

Input			Output		
V <sub>I</sub> @ 20mA	P <sub>O</sub> (mW)	I <sub>R</sub> (μA)	I <sub>L</sub> (μA)	I <sub>CEO</sub> (μA)	Type
1.5	3.0	10.0	1.0	0.1	Photo Transistor


### OED-SI3181-2T

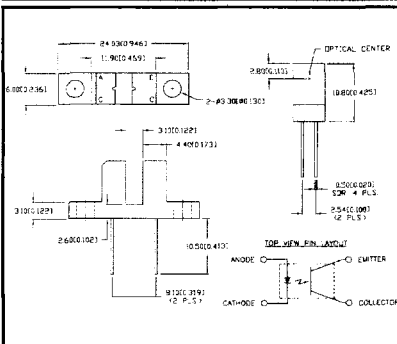

Package Style	Limits of Safe Operation			
	V <sub>R</sub> (V)	P <sub>D</sub> (mW)	I <sub>F</sub> (mA)	t <sub>opr</sub> (C°)
Slotted Holder + 2 Tabs	5.0	100	50	-20 ~ + 85

Input			Output		
V <sub>I</sub> @ 20mA	P <sub>O</sub> (mW)	I <sub>R</sub> (μA)	I <sub>L</sub> (μA)	I <sub>CEO</sub> (μA)	Type
1.6	3.0	10.0	4.0	0.1	Photo Transistor

### OED-SI3272

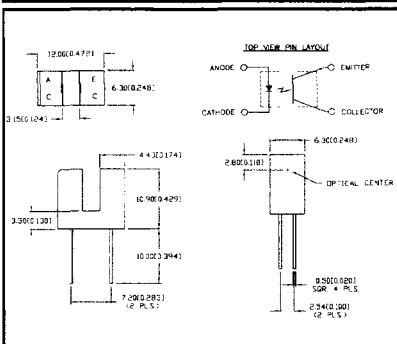

Package Style	Limits of Safe Operation			
	V <sub>R</sub> (V)	P <sub>D</sub> (mW)	I <sub>F</sub> (mA)	t <sub>opr</sub> (C°)
Slotted Holder	5.0	100	60	-20 ~ + 85

Input			Output		
V <sub>I</sub> @ 20mA	P <sub>O</sub> (mW)	I <sub>R</sub> (μA)	I <sub>L</sub> (μA)	I <sub>CEO</sub> (μA)	Type
1.5	3.0	10.0	2.0	0.1	Photo Transistor