

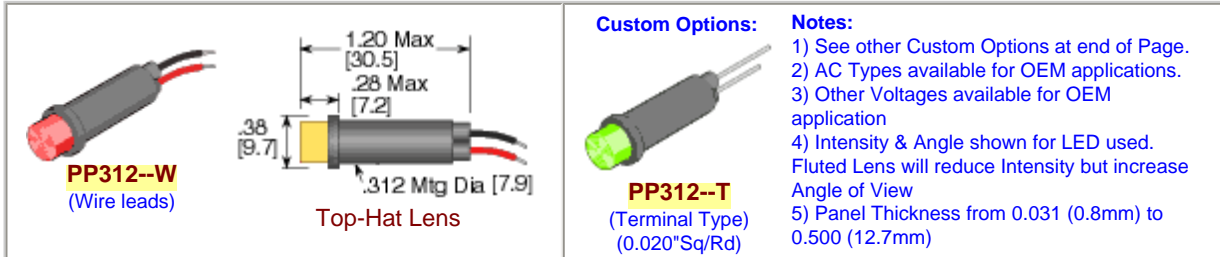

[View Cart ::](#)
[Checkout ::](#)

Sunlight Visible Snap-In Panel Mount LED Lamps

PP312 Series, Clear Top Hat Lens, 5/16"(8mm) Mtg.Dia.

[Page 1 \(Super-Bright\)](#)
[Page 2 \(Low-Cost Diffused\)](#)
[\(See Special Notes\)](#)

All dimensions in inches [mm]



Mark To Order	Part Number	Retail Price (Volume Discount Available)	Min Order Qty	Input Volts‡ (V)	LED Intensity I _v (mcd) typ	Current I _f (mA) typ	Wave Length (nm)	LED Full Angle
Sunlight Visible Ultra Red (660nm) WaterClear with 6" Wire Leads								
	PP312-OUR-002F-W6	\$5.50ea	10	2Vf	1800	15-20	660	12-15°
	PP312-OUR-028V-W6	\$5.50ea	10	24/28	900	10-12	660	12-15°
	PP312-OUR-120A-W6	\$5.50ea	10	120VAC	450	6-8	660	12-15°
Sunlight Visible Super Yellow (585nm) WaterClear with 6" Wire Leads								
	PP312-UY-002F-W6	\$5.50ea	10	2Vf	3750	15-20	595	12-15°
	PP312-UY-028V-W6	\$5.50ea	10	24/28	1800	10-12	595	12-15°
	PP312-UY-120A-W6	\$5.50ea	10	120VAC	900	6-8	595	12-15°
Sunlight Visible Super White (8000K) WaterClear with 6" Wire Leads								
	PP312-1CW-03.5F-W6	\$7.50ea	10	3.5Vf	1250	15-20	8000K	12-15°
	PP312-1CW-028V-W6	\$7.50ea	10	24/28	625	10-12	8000K	12-15°
	PP312-1CW-120A-W6	\$7.50ea	10	120VAC	310	6-8	8000K	12-15°
Sunlight Visible Super L.Green (570nm) WaterClear with 6" Wire Leads								
	PP312-0UG-002F-W6	\$5.50ea	10	2Vf	1000	15-20	570	12-15°
	PP312-0UG-028V-W6	\$5.50ea	10	24/28	500	10-12	570	12-15°
	PP312-0UG-120A-W6	\$5.50ea	10	120VAC	250	6-8	570	12-15°
Sunlight Visible Super A.Green (525nm) WaterClear with 6" Wire Leads								
	PP312-1AG-03.5F-W6	\$7.50ea	10	3.5Vf	3000	15-20	525	12-15°
	PP312-1AG-028V-W6	\$7.50ea	10	24/28	1500	10-12	525	12-15°
	PP312-1AG-120A-W6	\$7.50ea	10	120VAC	750	6-8	525	12-15°
Sunlight Visible Super Blue (470nm) WaterClear with 6" Wire Leads								
	PP312-1PB-03.5F-W6	\$7.50ea	10	3.5Vf	1000	15-20	470	12-15°
	PP312-1PB-028V-W6	\$7.50ea	10	24/28	500	10-12	470	12-15°
	PP312-1PB-120A-W6	\$7.50ea	10	120VAC	250	6-8	470	12-15°

Special Notes for Custom Configurations:

- 1) For custom OEM large quantity applications, other angles of illumination available.
- 2) For custom OEM large quantity applications for reducing battery drain, low-current versions available.
- 3) For custom OEM large quantity applications, longer lead lengths 12" (30.5cm), 24" (61cm) & 36" (91cm) available.

‡ Input Voltage column is for general reference only. Contact LEDtronics for specific details.

23105 Kashiwa Ct, Torrance, CA 90505 - PH: (800) 579-4875/(310) 534-1505 - FAX: (310) 534-1424
© Copyright 1997-2003 LEDtronics, Inc. All Rights Reserved - Contact Webmaster@ledtronics.com

i2 Technologies US, Inc.

HTML Pages converted to PDF Document

This document contain component information from the manufacturer's website which are not available in a revision controlled document from the manufacturer. To facilitate the addition of these parts into the Electronics Database, we are converting the HTML pages related to that part, from the manufacturer's website into Adobe PDF format. The contents of this document is based on the information provided on the manufacturer's website, therefore the information may have been changed by the manufacturer since this was created.

