

## Resin-Coated, Radial-Lead Tantalum Capacitors



### FEATURES

- Flame retardant encapsulation
- Practically without epoxy run down
- Very high temperature range
- Improved humidity class
- Very low leakage current
- Very high CV product
- Close capacitance tolerance
- Low temperature dependence
- Very high operational reliability
- Very low failure rate
- Preaged under temperature and voltage

Tantalum capacitors with sintered anode and solid semiconductor electrolyte with flame retardant fluidized bed coating. The type ETQW is characterized by very favorable electrical values even at higher ambient temperatures. The capacitor complies with DIN 45910 part 147. This type is also available as a radially taped version.

### MECHANICAL SPECIFICATIONS

**Colour:** Gold

**Laser Marked:** Capacity and voltage in clear text; Plus pole marked, Date code (year/month) according to DIN IEC 62

**Leads :** Tinned

### ORDERING INFORMATION

**Q1B**

TYPE

ETQW 1A ....  
ETQW 6R

**685**

CAPACITANCE

Expressed in picofarads. The first two digits are significant figures. The third is the number of zeros following.

**603**

DC VOLTAGE RATING  
@ + 85°C

Expressed by zeros if needed to complete the 3 digit block. A decimal point is indicated by an "0" (603 = 6.3 Volts)

**M**

CAPACITANCE  
TOLERANCE

M = ± 20%  
K = ± 10%

**00**


LEAD STYLES AND  
PACKAGING

See Lead styles  
and  
packaging table


**D**

### DIMENSIONS in millimeters


#### BASIC VERSION

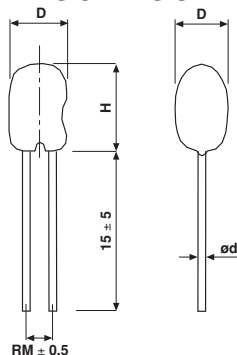

#### FORM DS



#### FORM L



MODEL	D MAX.	H MAX.	RM	ØD ± 0.05	FORM DS		FORM L	
					H2 MAX	RM	H2 MAX	RM
ETQW — 1	4.5	7.5	2.5	0.5	10.5	5	10.5	5
ETQW — 2	5.0	9.5	2.5	0.5	12.5	5	12.5	5
ETQW — 3	6.0	10.5	2.5	0.5	13.5	5	13.5	5
ETQW — 4	6.5	11.5	2.5	0.5	14.5	5	14.5	5
ETQW — 5	9.0	14.0	5.0	0.5	17.0	5	-	-
ETQW — 6	9.5	17.0	5.0	0.5	20.0	5	-	-



**STANDARD RATINGS AND CASE CODES**

C <sub>R</sub> μF	RATED VOLTAGE U <sub>R</sub> @ + 85°C						
	3.0V	6.3V	10V	16V	25V	35V	50V
0.10						1A	1A
0.15						1A	1A
0.22						1A	1A
0.33						1A	1B
0.47						1A	1B
0.68						1A	2C
1.0					1A	1A	2D
1.5					1A	1B	2E
2.2				1A	1B	2C	3F
3.3			1A	1B	2C	2D	3G
4.7		1A	1B	2C	2D	2E	4H
6.8	1A	1B	2C	2D	2E	3F	5J
10	1A	2C	2D	2E	3F	3G	5L
15	1B	2D	2E	3F	4H	5J	6M
22	2C	2E	3F	3G	5J	5L	6P
33	2D	3F	3G	4H	5K	6M	
47	2E	3G	4H	5K	6M	6P	
68	3F	4H	5J	5L	6N		
100	3G	5J	5L	6N			
150	4H	5L	6N	6R			
220	5J	6M	6P				
330	5L	6P					
470							

**STANDARD RATINGS**

CR (μF)	CASE CODE	PART NUMBER	D MAX (mm)	H MAX (mm)	H2 MAX (mm)	RM ± 0.05	d ± 0.05	MAX. DCL @ + 20°C, (μA)	MAX. Z @ 100kHz (OHMS)	MAX. DF @ 120Hz + 20°C
U <sub>R</sub> = 3 Volt @ + 85 °C, Surge = 3.9 V						U <sub>C</sub> = 2 V @ + 125 °C				
6.8	1A	Q1A685003(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	5.4	0.06
10.0	1A	Q1A106003(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	4.5	0.06
15.0	1B	Q1B156003(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	3.6	0.06
22.0	2C	Q2C226003(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.5	2.9	0.06
33.0	2D	Q2D336003(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.8	2.3	0.06
47.0	2E	Q2E476003(*)_ _D	5.0	9.5	12.5	2.5	0.5	1.1	1.8	0.06
68.0	3F	Q3F686003(*)_ _D	6.0	10.5	13.5	2.5	0.5	1.6	1.4	0.06
100.0	3G	Q3G107003(*)_ _D	6.0	10.5	13.5	2.5	0.5	2.4	1.1	0.08
150.0	4H	Q4H157003(*)_ _D	6.5	11.5	14.5	2.5	0.5	3.6	0.9	0.08
220.0	5J	Q5J227003(*)_ _D	9.0	14.0	17.0	5.0	0.5	5.3	0.7	0.08
330.0	5L	Q5L337003(*)_ _D	9.0	14.0	17.0	5.0	0.5	7.9	0.6	0.08

(\*) Insert M for ± 20% tolerance or K for ± 10%  
 \_ \_ Lead style and packaging code, see lead style and packaging



Resin-Coated, Radial-Leaded  
Tantalum Capacitors

Vishay Roederstein

STANDARD RATINGS										
CR ( $\mu$ F)	CASE CODE	PART NUMBER	Dimensions					MAX. DCL @ + 20°C, ( $\mu$ A)	MAX. Z @ 100kHz (OHMS)	MAX. DF @ 120Hz + 20°C
			D MAX (mm)	H MAX (mm)	H2 MAX (mm)	RM $\pm 0.05$	d $\pm 0.05$			
<b><math>U_R = 6.3</math> Volt @ + 85 °C, Surge = 7.8 V</b>			<b><math>U_C = 4</math> V @ + 125 °C</b>							
4.7	1A	Q1A475603(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	5.4	0.06
6.8	1B	Q1B685603(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	4.5	0.06
10.0	2C	Q2C106603(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.5	3.6	0.06
15.0	2D	Q2D156603(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.8	2.9	0.06
22.0	2E	Q2E226603(*)_ _D	5.0	9.5	12.5	2.5	0.5	1.1	2.3	0.06
33.0	3F	Q3F336603(*)_ _D	6.0	10.5	13.5	2.5	0.5	1.7	1.8	0.06
47.0	3G	Q3G476603(*)_ _D	6.0	10.5	13.5	2.5	0.5	2.4	1.7	0.06
68.0	4H	Q4H686603(*)_ _D	6.5	11.5	14.5	2.5	0.5	3.4	1.1	0.06
100.0	5J	Q5J107603(*)_ _D	9.0	14.0	17.0	5.0	0.5	5.0	0.9	0.08
150.0	5L	Q5L157603(*)_ _D	9.0	14.0	17.0	5.0	0.5	7.6	0.7	0.08
220.0	6M	Q6M227603(*)_ _D	9.5	17.0	20.0	5.0	0.5	11.1	0.6	0.08
330.0	6P	Q6P337603(*)_ _D	9.5	17.0	20.0	5.0	0.5	16.6	0.5	0.08
<b><math>U_R = 10</math> Volt @ + 85 °C, Surge = 13 V</b>			<b><math>U_C = 6.3</math> V @ + 125 °C</b>							
3.3	1A	Q1A335010(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	5.9	0.06
4.7	1B	Q1B475010(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	4.5	0.06
6.8	2C	Q2C685010(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.5	3.6	0.06
10.0	2D	Q2D106010(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.8	2.9	0.06
15.0	2E	Q2E156010(*)_ _D	5.0	9.5	12.5	2.5	0.5	1.2	2.3	0.06
22.0	3F	Q3F226010(*)_ _D	6.0	10.5	13.5	2.5	0.5	1.8	1.8	0.06
33.0	3G	Q3G336010(*)_ _D	6.0	10.5	13.5	2.5	0.5	2.6	1.4	0.06
47.0	4H	Q4H476010(*)_ _D	6.5	11.5	14.5	2.5	0.5	3.8	1.1	0.06
68.0	5J	Q5J686010(*)_ _D	9.0	14.0	17.0	5.0	0.5	5.4	0.9	0.06
100.0	5L	Q5L107010(*)_ _D	9.0	14.0	17.0	5.0	0.5	8.0	0.7	0.08
150.0	6N	Q6N157010(*)_ _D	9.5	17.0	20.0	5.0	0.5	12.0	0.6	0.08
220.0	6P	Q6P227010(*)_ _D	9.5	17.0	20.0	5.0	0.5	17.6	0.5	0.08
<b><math>U_R = 16</math> Volt @ + 85 °C, Surge = 20.8 V</b>			<b><math>U_C = 10</math> V @ + 125 °C</b>							
2.2	1A	Q1A225016(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	6.3	0.06
3.3	1B	Q1B335016(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	5.4	0.06
4.7	2C	Q2C475016(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.6	4.1	0.06
6.8	2D	Q2D685016(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.9	2.9	0.06
10.0	2E	Q2E106016(*)_ _D	5.0	9.5	12.5	2.5	0.5	1.3	2.3	0.06
15.0	3F	Q3F156016(*)_ _D	6.0	10.5	13.5	2.5	0.5	1.9	1.8	0.06
22.0	3G	Q3G226016(*)_ _D	6.0	10.5	13.5	2.5	0.5	2.8	1.4	0.06
33.0	4H	Q4H336016(*)_ _D	6.5	11.5	14.5	2.5	0.5	4.2	1.1	0.06
47.0	5K	Q5K476016(*)_ _D	9.0	14.0	17.0	5.0	0.5	6.0	0.9	0.06
68.0	5L	Q5L686016(*)_ _D	9.0	14.0	17.0	5.0	0.5	8.7	0.7	0.06
100.0	6N	Q6N107016(*)_ _D	9.5	17.0	20.0	5.0	0.5	12.8	0.6	0.08
150.0	6R	Q6R157016(*)_ _D	9.5	17.0	20.0	5.0	0.5	19.2	0.5	0.08
<b><math>U_R = 25</math> Volt @ + 85 °C, Surge = 32.5 V</b>			<b><math>U_C = 16</math> V @ + 125 °C</b>							
1.0	1A	Q1A105025(*)_ _D	4.5	7.1	10.5	2.5	0.5	0.5	7.7	0.04
1.5	1A	Q1A155025(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	6.8	0.04
2.2	1B	Q1B225025(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	5.4	0.06
3.3	2C	Q2C335025(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.7	4.1	0.06
4.7	2D	Q2D475025(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.9	2.9	0.06
6.8	2E	Q2E685025(*)_ _D	5.0	9.5	12.5	2.5	0.5	1.4	2.3	0.06
10.0	3F	Q3F106025(*)_ _D	6.0	10.5	13.5	2.5	0.5	2.0	1.8	0.06
15.0	4H	Q4H156025(*)_ _D	6.5	11.5	14.5	2.5	0.5	3.0	1.4	0.06
22.0	5J	Q5J226025(*)_ _D	9.0	14.0	17.0	5.0	0.5	4.4	1.1	0.06
33.0	5K	Q5K336025(*)_ _D	9.0	14.0	17.0	5.0	0.5	6.6	0.9	0.06
47.0	6M	Q6M476025(*)_ _D	9.5	17.0	20.0	5.0	0.5	9.4	0.7	0.06
68.0	6N	Q6N686025(*)_ _D	9.5	17.0	20.0	5.0	0.5	13.6	0.6	0.06

(\*) Insert M for  $\pm 20\%$  tolerance or K for  $\pm 10\%$   
 \_ \_ Lead style and packaging code, see lead style and packaging



STANDARD RATINGS										
CR ( $\mu$ F)	CASE CODE	PART NUMBER	DIMENSIONS					MAX. DCL @ + 20°C, ( $\mu$ A)	MAX. Z @ 100kHz (OHMS)	MAX. DF @ 120Hz + 20°C
			D MAX (mm)	H MAX (mm)	H2 MAX (mm)	RM $\pm 0.05$	d $\pm 0.05$			
<b><math>U_R = 35</math> Volt @ + 85 °C, Surge = 45.5 V</b>						<b><math>U_C = 23</math> V @ + 125 °C</b>				
0.1	1A	Q1A104035(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	34.2	0.04
0.15	1A	Q1A154035(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	27.0	0.04
0.22	1A	Q1A224035(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	20.7	0.04
0.33	1A	Q1A334035(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	16.2	0.04
0.47	1A	Q1A474035(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	12.6	0.04
0.68	1A	Q1A684035(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	9.0	0.04
1.0	1A	Q1A105035(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	7.2	0.04
1.5	1B	Q1A155035(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	5.9	0.04
2.2	2C	Q2C225035(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.6	4.5	0.06
3.3	2D	Q2D335035(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.9	3.2	0.06
4.7	2E	Q2E475035(*)_ _D	5.0	9.5	12.5	2.5	0.5	1.3	2.3	0.06
6.8	3F	Q3F685035(*)_ _D	6.0	10.5	13.5	2.5	0.5	1.9	1.8	0.06
10.0	3G	Q3G106035(*)_ _D	6.0	10.5	13.5	2.5	0.5	2.8	1.4	0.06
15.0	5J	Q5J156035(*)_ _D	9.0	14.0	17.0	5.0	0.5	4.2	1.1	0.06
22.0	5L	Q5L226035(*)_ _D	9.0	14.0	17.0	5.0	0.5	6.2	0.9	0.06
33.0	6M	Q6M336035(*)_ _D	9.5	17.0	20.0	5.0	0.5	9.2	0.7	0.06
47.0	6P	Q6P476035(*)_ _D	9.5	17.0	20.0	5.0	0.5	13.2	0.6	0.06
<b><math>U_R = 50</math> Volt @ + 85 °C, Surge = 65 V</b>						<b><math>U_C = 33</math> V @ + 125 °C</b>				
0.1	1A	Q1A104050(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	34.2	0.04
0.15	1A	Q1A154050(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	27.0	0.04
0.22	1A	Q1A224050(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	20.7	0.04
0.33	1B	Q1B334050(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	16.2	0.04
0.47	1B	Q1B474050(*)_ _D	4.5	7.5	10.5	2.5	0.5	0.5	12.6	0.04
0.68	2C	Q2C684050(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.5	9.0	0.04
1.0	2D	Q2D105050(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.5	7.2	0.04
1.5	2E	Q2E155050(*)_ _D	5.0	9.5	12.5	2.5	0.5	0.6	5.9	0.04
2.2	3F	Q3F225050(*)_ _D	6.0	10.5	13.5	2.5	0.5	0.9	4.5	0.06
3.3	3G	Q3G335050(*)_ _D	6.0	10.5	13.5	2.5	0.5	1.3	3.2	0.06
4.7	4H	Q4H475050(*)_ _D	6.5	11.5	14.5	2.5	0.5	1.9	2.3	0.06
6.8	5J	Q5J685050(*)_ _D	9.0	14.0	17.0	5.0	0.5	2.7	1.8	0.06
10.0	5L	Q5L106050(*)_ _D	9.0	14.0	17.0	5.0	0.5	4.0	1.4	0.06
15.0	6M	Q6M156050(*)_ _D	9.5	17.0	20.0	5.0	0.5	6.0	1.1	0.06
22.0	6P	Q6P226050(*)_ _D	9.5	17.0	20.0	5.0	0.5	8.8	0.9	0.06

(\*) Insert M for  $\pm 20\%$  tolerance or K for  $\pm 10\%$   
 \_ \_ Lead style and packaging code, see lead style and packaging

**PERFORMANCE CHARACTERISTICS**

1. **Climatic Category** : 55/125/56 acc. to IEC
2. **Temperature Range** : - 55°C up to + 125°C. with linear voltage derating to category voltage UC
3. **Rated Voltage, Category Voltage** : 3V\_ to 50V\_  
2V\_ to 33V\_
4. **Surge Voltage** : 1.3 times of rated voltage at + 85°C
5. **Reverse voltage (Temporarily)** :  
15% of the rated DC voltage at + 20°C  
10% of the rated DC voltage at + 55°C  
5% of the rated DC voltage at + 85°C
6. **Rated Capacitance** : 0.1µF to 330µF
7. **Capacitance Tolerance** : ± 20%, ± 10%,
8. **Leakage Current in µA** : Measured at + 20°C after 5 minutes. ≤ 0.008 x CR x UR or 0.5 µA, whichever is greater
9. **Dissipation Factor** : at 120Hz and + 20°C  
See table
10. **Impedance** : Measured at 100kHz and + 20°C  
See table

11. **Permissible AC Voltage Stress** : The highest permissible AC voltage for the respective frequency may be taken from the brochure "General information".

The values apply for + 20°C For higher temperatures, the values have to be multiplied with the following factors :

TEMPERATURE	FACTOR
+ 50°C	0.7
+ 85°C	0.5
+ 125°C.	0.3

Intermediate values can be obtained by linear interpolation. For further notes on AC voltage stress : See general information

12. **Service Life** : > 300.000 h \*)
13. **Failure Percentage** : ≤ 0.3% within 100.000 h \*)
14. **Failure Rate (λ)** : ≤ 0.3 10<sup>-7</sup> /h = ≤ 30 fit\*\*
15. **Failure Criteria** : Catastrophic failure : Short circuit or interruption

**Drift Failure:** ΔC/C > +5 - 15%  
Z > 3 times initial limit value  
IR > 5 times initial value + 5µA


\*\* related to UR, + 40°C and a circuit resistance of ≥ 3 Ω/V

**16. Characteristics at high and low temperatures** (the values shall not exceed the following limits)


TEST TEMPERATURE	- 55°C	+ 20°C	+ 85°C	+ 125°C
ΔC/C < tanδ	- 10%	-	+ 12%	+ 15%
≤ 1.5µF	0.04	0.04	0.04	0.04
< 10µF	0.06	0.06	0.06	0.06
< 100µF	0.08	0.06	0.08	0.08
≥ 100µF	0.10	0.08	0.10	0.10
Leakage current IR	-	≤ 0.008 x CR x UR or 0.5µA whichever is greater	≤ 0.08 x CR x UR or 5.0µA whichever is greater	≤ 0.1 x CR x UR or 6.25µA whichever is greater *) )Measured at category voltage

**LEAD STYLES AND PACKAGING**

**REEL PACKING**

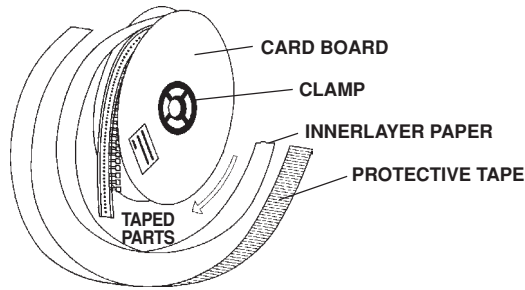


**AMMO PACKAGING (mm)**

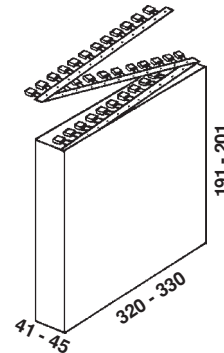

CASE SIZE	CODE	RM IN MM ± 0.5	SPECIFICATION	REMARKS
1 - 6	00	2.5/5	Bulk	Reel with positive pole in tape run direction in front is standard!
1 - 6	V0	5	Form DS, Bulk	
1 - 4	W0	2.5	Reel, positive pole in front of unreeling direction	
1 - 4	T0	2.5	Reel, negative pole in front of unreeling direction	
1 - 4	H0	2.5	Ammo	
1 - 5	V2	5	Reel, positive pole in front of unreeling direction	
1 - 5	R0	5	Reel, negative pole in front of unreeling direction	
1 - 5	O8	5	Ammo	
1 - 4	C0	5	Style "L" Bulk	

CASE SIZE	BULK 00, V0, C0	REEL W0, T0, V2, R0	AMMO H0, O8
ETQW 1 A,B	500	2500	2500
ETQW 2 C,D,E	500	2000	2000
ETQW 3 F,G	500	1500	1500
ETQW 4 H	500	1500	1500
ETQW 5 J,K,L	100	500	500
ETQW 6 M,N,P,R	100	-	-

**TAPING ACCORDING TO IEC 286-2**

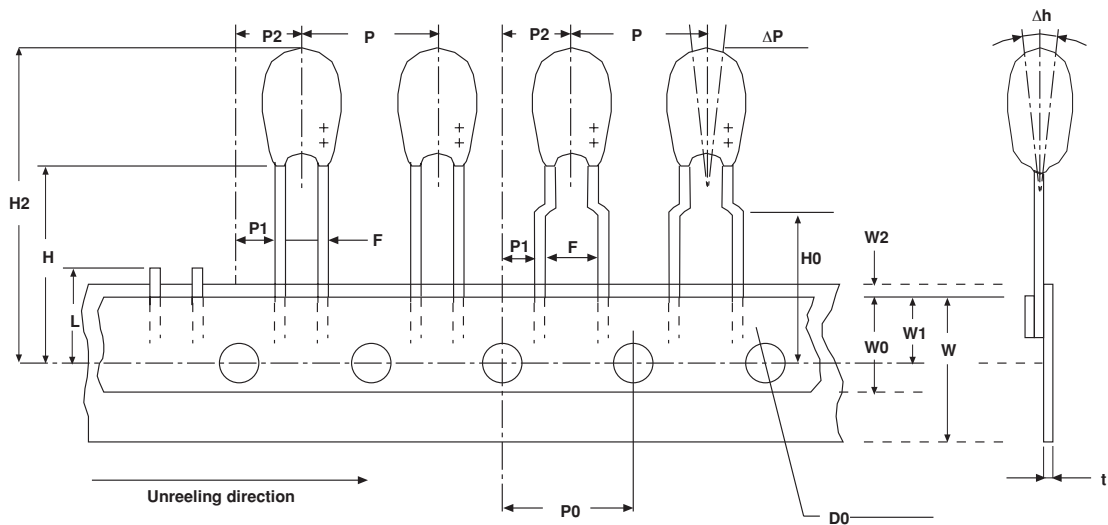

DESIGNATION	SYMBOL	DIMENSIONS (mm)
Holding tape width	W	18.0 (+ 1 / - 0.5)
Adhesive tape width	W0	Min. 5.0
Distance of components	P	12.7 ± 1
Hole center to component center	P2	6.35 ± 1.3
Hole center to lead	P1	5.1 / 3.8 ± 0.7
Distance of body to hole center	H <sup>*</sup>	18.0 (+ 2 / - 0)
Distance of lead to hole center	H0	16.0 ± 0.5
Component upper edge to hole center	H1	Max. 32.0
Adhesive tape location	W2	Max. 3.0
Hole location	W1	9.0 (+ 0.75 / - 0.5)
Distance of holes	P0	12.7 ± 0.3
Hole diameter	D0	4.0 ± 0.3
Lead diameter	d	0.5 ± 0.05
Component alignment	Δh	Max. ± 2.0
Pitch	F	2.5 / 5.0 (+ 0.6 / - 0.1)
Holding tape thickness	t	0.5 ± 0.2
Component alignment	ΔP	Max. ± 1.3
Length of snapped leads	L	Max. 11.0

(\*) also available : 16mm and 20mm taping according to DIN-IEC 286 part 2



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.