

**SOP — XX A XX — SMT — TT**

Position:  
8, 14, 20, 24



Plating

A = .300" Row Spacing



Blank = Tube Pack

TP = Tape and Reel (body only)


\*Frames are packaged in vinyl bags

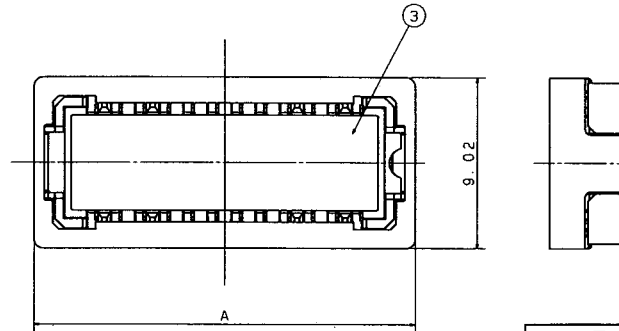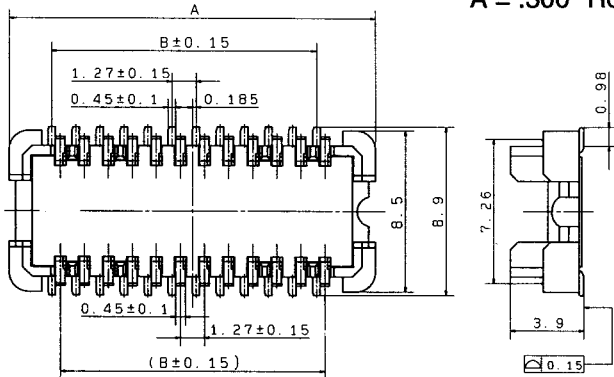

PC board pattern

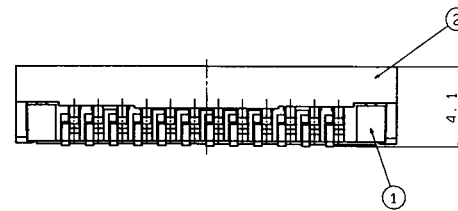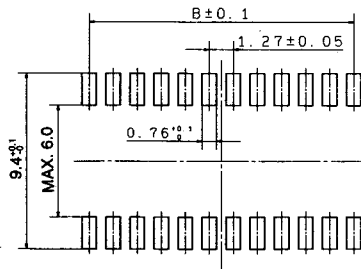

- 1 = Body
- 2 = Frame
- 3 = SO Package IC

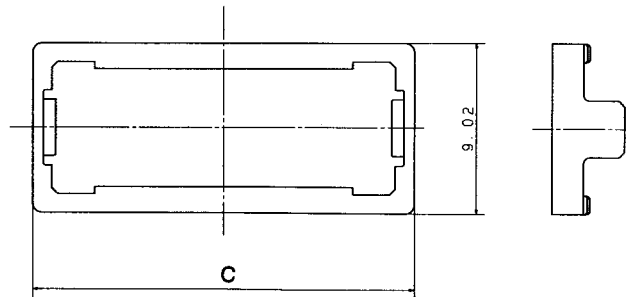

± 0.3 General Tolerance

Positions	A	B	C
8	9.15	3.81	9.95
14	12.98	7.62	13.76
20	16.77	11.43	17.57
24	19.31	13.97	20.11

ALL DIMENSIONS  
IN MILLIMETERS

<b>Robinson Nugent</b>	812/945-0211
	812/945-0805 FAX
<b>SOP-XXAXX-SMT-XX</b> SMT SOP Socket (.300" row spacing) Body and Frame	