

**NEW!**

SMT Power Inductors - DO2010 Series



- Smallest power inductor, only 2 mm square and 1 mm high
- Can handle up to 2.4 A of saturating current

Designer's Kit C399 contains 5 of each part

Core material Ferrite

Terminations RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

Weight 11 mg

Ambient temperature -40°C to +85°C with Irms current, +85°C to +125°C with derated current

Storage temperature Component: -40°C to +125°C.
Packaging: -55°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Mean Time Between Failures (MTBF) 26,315,789 hours

Packaging 1000 per 7" reel; 3500 per 13" reel;
Plastic tape: 12 mm wide, 0.23 mm thick, 8 mm pocket spacing, 1.19 mm pocket depth

PCB washing Only pure water or alcohol recommended

Part number ¹	Inductance ±20% ² (µH)	DCR max ³ (Ohms)	SRF typ ⁴ (MHz)	Isat ⁵ (A)	Irms ⁶ (A)
DO2010-501ML_	0.50	0.100	250	2.40	1.50
DO2010-681ML_	0.68	0.120	200	2.10	1.50
DO2010-801ML_	0.80	0.150	185	1.80	1.40
DO2010-102ML_	1.0	0.200	162	1.80	1.20
DO2010-152ML_	1.5	0.270	127	1.45	0.97
DO2010-202ML_	2.0	0.315	110	1.25	0.90
DO2010-222ML_	2.2	0.400	104	1.20	0.84
DO2010-332ML_	3.3	0.550	85	0.98	0.73
DO2010-472ML_	4.7	0.800	65	0.80	0.60
DO2010-682ML_	6.8	1.00	55	0.73	0.54
DO2010-822ML_	8.2	1.08	50	0.65	0.49
DO2010-103ML_	10	1.45	43	0.61	0.44
DO2010-123ML_	12	1.84	35	0.51	0.39
DO2010-153ML_	15	2.14	30	0.47	0.36
DO2010-223ML_	22	2.80	25	0.42	0.32
DO2010-333ML_	33	4.10	20	0.34	0.25
DO2010-473ML_	47	6.00	16	0.28	0.21
DO2010-683ML_	68	8.80	13	0.23	0.16
DO2010-104ML_	100	15.7	11	0.18	0.13
DO2010-224ML_	220	38.0	8.0	0.10	0.08

1. When ordering, please specify **termination** and **packaging** codes:

DO2010-123MLC

Termination: L = RoHS compliant matte tin over nickel over silver-platinum-glass frit

Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or
S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (1000 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (3500 parts per full reel).

- Inductance tested at 100 kHz, 0.1 Vrms.
 - DCR measured on a micro-ohmmeter.
 - SRF measured using Agilent/HP 4191A or equivalent.
 - DC current at which the inductance drops 10% (typ) from its value without current.
 - Current that causes a 40°C temperature rise from 25°C ambient.
 - Electrical specifications at 25°C.
- See Qualification Standards section for environmental and test data.
Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Coilcraft®

Specifications subject to change without notice.
Please check our website for latest information.

Document 413-1 Revised 09/18/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469


E-mail info@coilcraft.com Web <http://www.coilcraft.com>




NEW!

SMT Power Inductors - DO2010 Series





Typical L vs Current

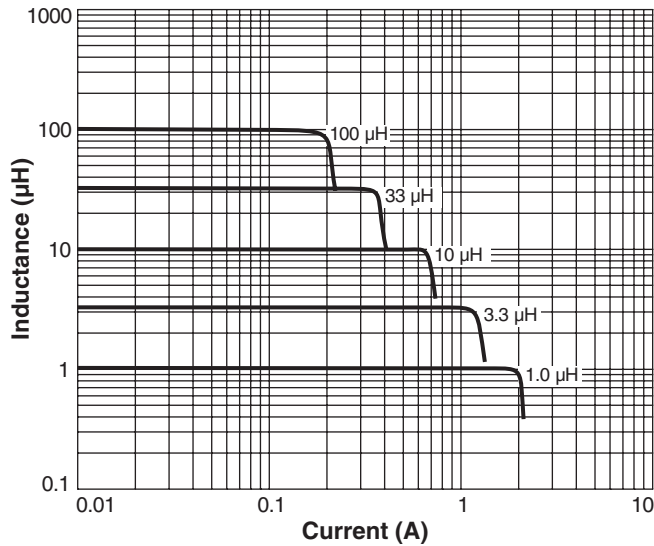


Typical L vs Frequency

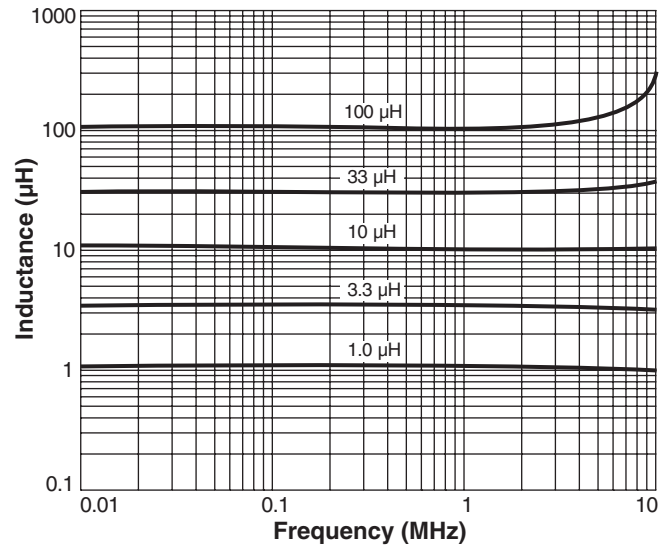

Typical Current Derating

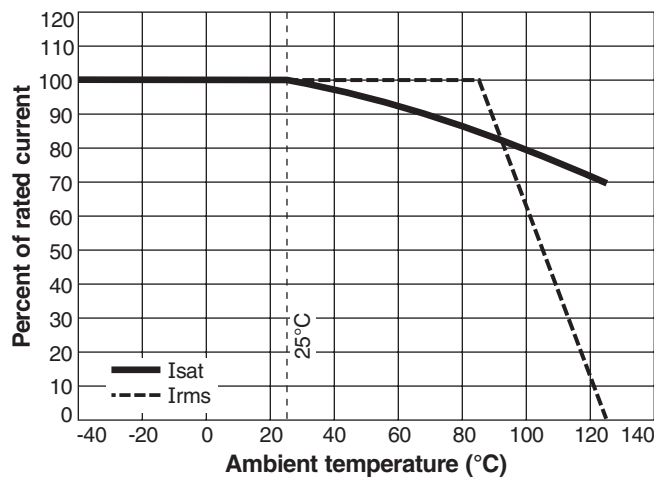

Recommended Land Pattern

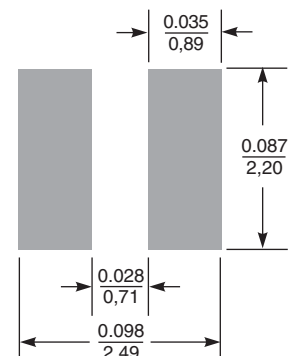

Dimensions are in $\frac{\text{inches}}{\text{mm}}$



Specifications subject to change without notice. Please check our website for latest information.

Document 413-2 Revised 09/18/07

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>