

# Product Specifications

## L4P43A-PNMDF-1M

LDF4-50A SureFlex™ Jumper with interface types N Male and 7-16 DIN Female, 1 m



## CHARACTERISTICS


### General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Cable Family	LDF4-50A
Interface, Connector A	N Male
Interface, Connector B	7-16 DIN Female
Length	1.000 m   3.281 ft
Attachment, Connector B	Field attachment

### Electrical Specifications

DTF, Connector A	-32.00 dB
DTF, Connector B	-32.00 dB

### Jumper Assembly Sample Label

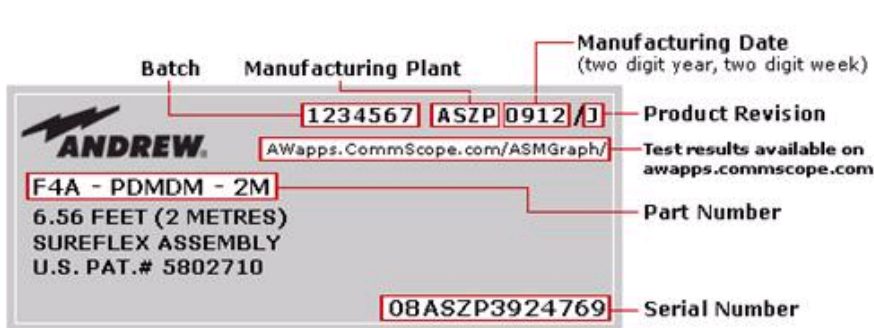

### Return Loss

Frequency Band	VSWR	Return Loss (dB)
800–970 MHz	1.15	23.13
1420–1530 MHz	1.15	23.13
1700–2180 MHz	1.15	23.13

### Regulatory Compliance/Certifications

# Product Specifications

L4P43A:PNMDF-1M



## Agency

RoHS 2002/95/EC  
China RoHS SJ/T 11364-2006

## Classification

Compliant by Exemption  
Above Maximum Concentration Values (MCV)



## INCLUDED PRODUCTS



### **LDF4-50A**

LDF4-50A, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 1/2 in, black PE jacket

---