

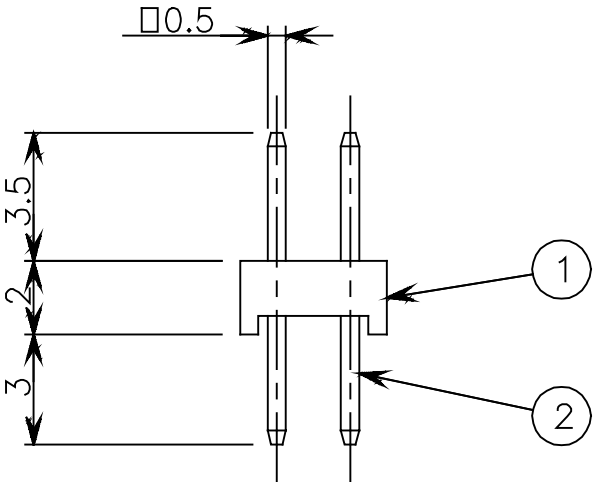


n	A	B
2	—	2
4	2	4
6	4	6
8	6	8
10	8	10
12	10	12
14	12	14
16	14	16
18	16	18
20	18	20
22	20	22
24	22	24
26	24	26
28	26	28
30	28	30
32	30	32
34	32	34
36	34	36
38	36	38
40	38	40
42	40	42
44	42	44
46	44	46
48	46	48
50	48	50
52	50	52
54	52	54
56	54	56
58	56	58
60	58	60

n	A	B
62	60	62
64	62	64
66	64	66
68	66	68
70	68	70
72	70	72
74	72	74
76	74	76
78	76	78
80	78	80
82	80	82
84	82	84
86	84	86
88	86	88
90	88	90
92	90	92
94	92	94
96	94	96
98	96	98
100	98	100
102	100	102
104	102	104
106	104	106
108	106	108
110	108	110
112	110	112
114	112	114
116	114	116
118	116	118
120	118	120

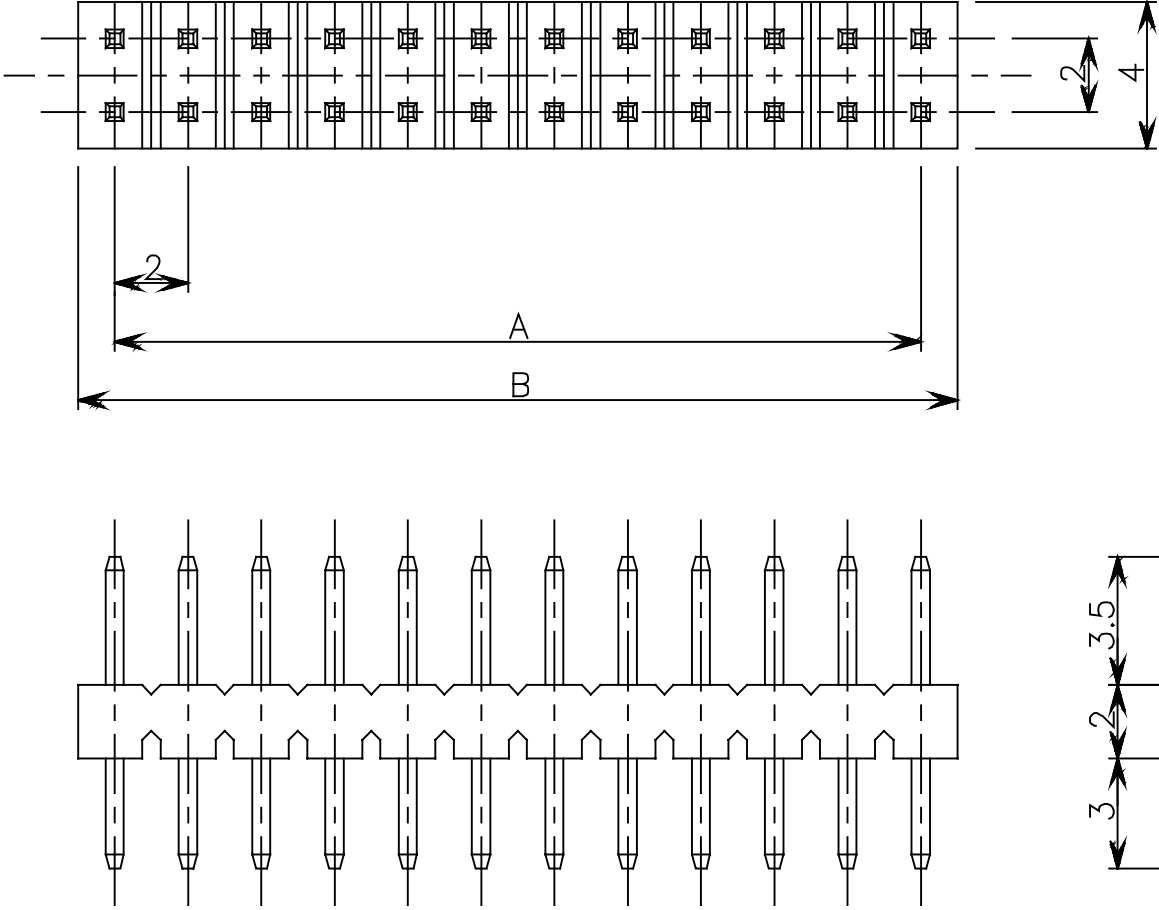

NOTE."n" SHOWS NUMBER OF CONTACTS.

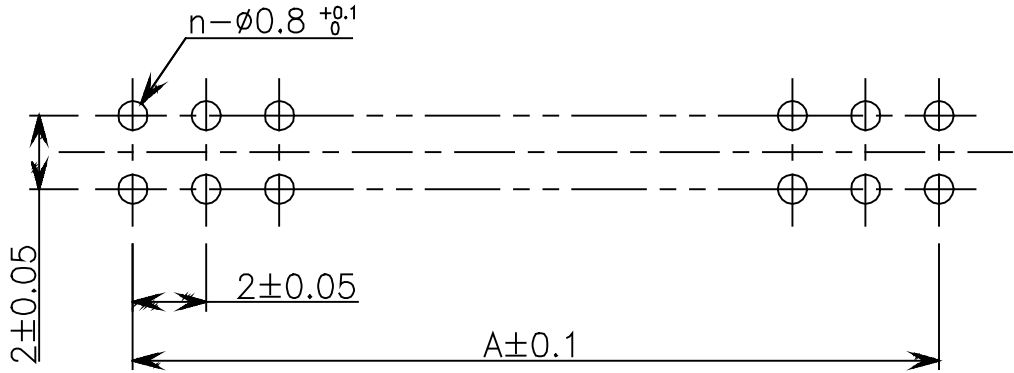

RECOMMENDED PCB LAYOUT

△										
△				2	CONTACTS	PHOSPHOR BRONZE	n	GOLD	_____	
△				1	INSULATOR	NYLON66	1	_____	UL94V-0 BLACK	
LTR.	DATE	BY	REV.	DESCRIPT	NO.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE AUG.06.99		SCALE 5 / 1		UNIT mm(INCH)	3RD . A . P	HONDA TSUSHIN KOGYO., LTD.				
DR		DE		CHK	CHK	APP	NAME	MALE CONNECTOR		
							PART NO.	LPC-(n)T31M2G		

LPC-T31M2G