

# Connector Saver

.050"

9 thru 51 Contacts

Low Profile Metal



**MQ**

Low Profile Plastic

**MP**

MQ-212-031-143-2200-93A  
(METAL)

MP-211-031-143-2200-93A  
(PLASTIC)

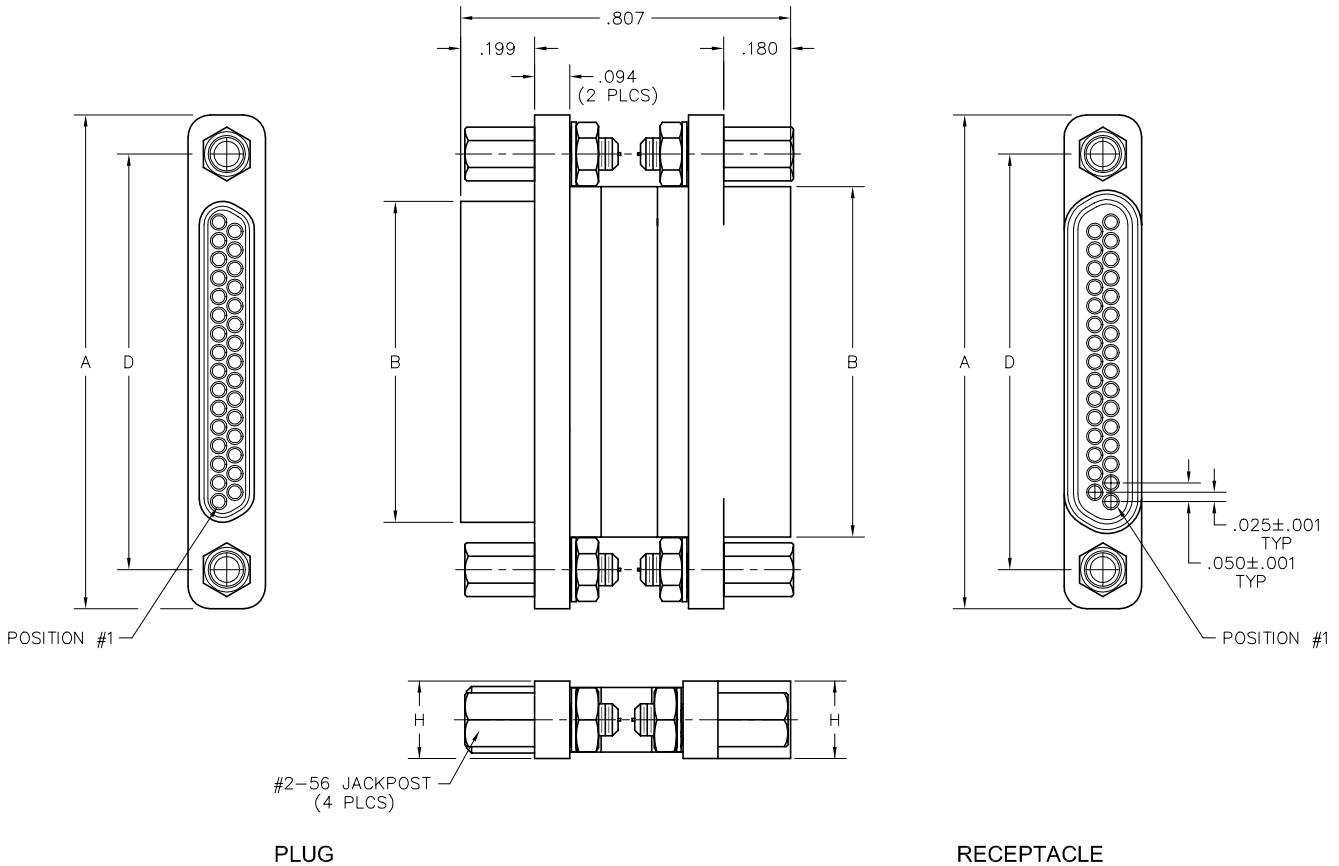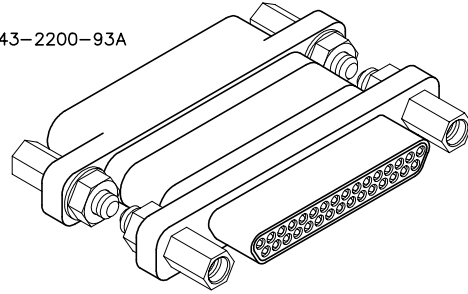

SIZE	CONTACT ROWS	DIMENSIONS					HARDWARE
		A	B		D	H ±.005	
			PLUG MAX	RCPT MAX			
9	2	.778	.292	.378	.565	.208	#2-56 UNC THD (.092 DIA THRU)
15		.928	.442	.528	.715		
21		1.078	.592	.678	.865		
25		1.178	.692	.778	.965		
31		1.328	.842	.928	1.115		
37		1.478	.992	1.078	1.265		
51	3	1.428	.942	1.028	1.215	.250	

PLUG/RECEPTACLE: MQ-212-031-143-2200-93A  
 MP-211-031-143-2200-93A  
 XX-XXX-XXX-XXX-XXXX-XXX

**SERIES**

MQ .050" Low Profile Metal  
 MP .050" Low Profile Plastic

**BODY**

2 2-Row (Sizes 9 thru 37)  
 3 3-Row (Size 51)

**BODY STYLE:**

1 Plug/Receptacle, straight with mounting ears

**BODY MATERIAL:**

1 Polyphenylene Sulfide (MN only)  
 2 Polyphenylene Sulfide with electroless nickel shell  
 3 Polyphenylene Sulfide with electrodeposited cadmium shell  
 4 Polyphenylene Sulfide with hard anodized back shell

**SIZE**

XXX Number of contacts (009, 015, 021, 025, 031 or 037)  
 051 Number of contacts (51)

**CONTACTS**

**TYPE CONTACTS/TERMINATIONS:**

14 Pin/Socket, straight

**PLATING OPTIONS:**

3 50  $\mu$ " Au contacts: 10  $\mu$ " Au terminations

**HARDWARE**

**STYLE OF HARDWARE:**

00 None  
 22 Two fixed jacknut assemblies

**POLARIZATION / WIRING:**

00 None

**OPTIONS**

93A Connector saver designator