



| REV. Status | TCA NO. | MODEL NO. | RATED CURRENT (ADC) | INDUCTANCE (uH)±20% | DCR (mohm MAX) | OD | HT |
|-----------------------|---------------|-----------|---------------------|---------------------|----------------|----------|----------|
| ISSUE 1 9/12/95 TS | P-A3-11400-01 | SKC-101 | 5 | 30 | 8.5 | 32(1.26) | 18(0.71) |
| | P-A3-11400-02 | SKC-102 | 5 | 50 | 11.5 | 32(1.26) | 18(0.71) |
| | P-A3-11400-03 | SKC-103 | 5 | 100 | 17.5 | 32(1.26) | 18(0.71) |
| | P-A3-11400-04 | SKC-104 | 5 | 150 | 24.0 | 32(1.26) | 18(0.71) |
| | P-A3-11400-05 | SKC-105 | 5 | 200 | 27.5 | 37(1.46) | 20(0.79) |

SKC-101~105



Schematic Diagram;



Country of origin

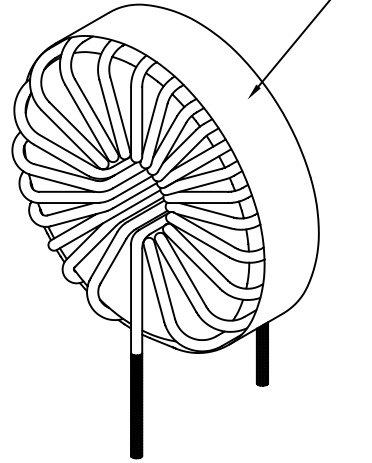

Mechanical Specifications;

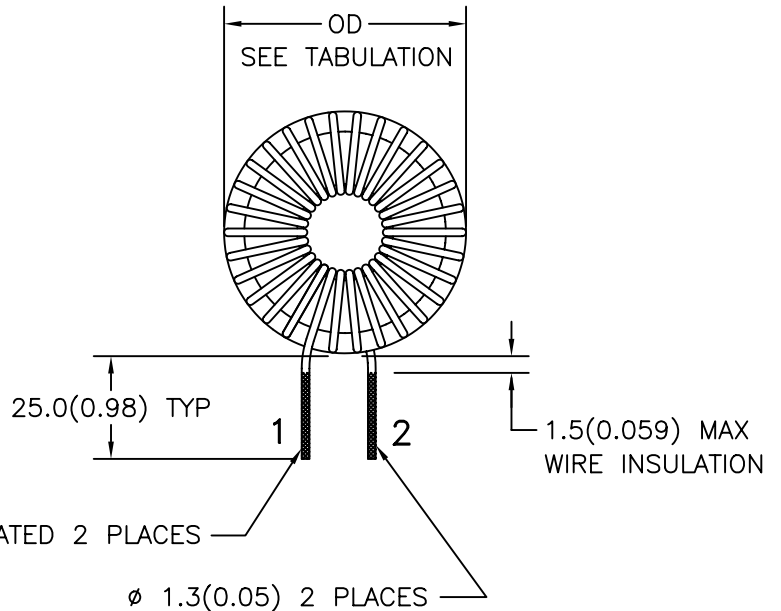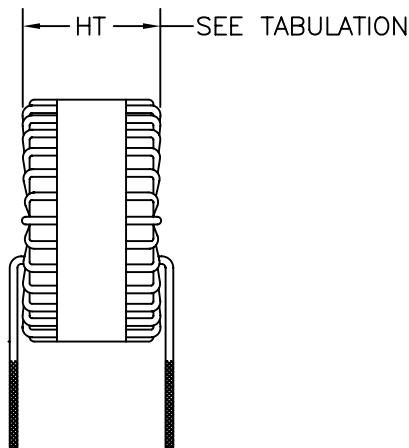

SOLDER COATED 2 PLACES

TOLERANCES (mm)

| | |
|---------|-------|
| ≤ 4 | ± 0.2 |
| 4 ≤ 20 | ± 0.3 |
| 20 ≤ 50 | ± 0.4 |

PREPARED BY:

K. Brennan

ENGINEER:

T. Shiozawa

QUALITY CONTROL:

V. Casey

APPROVED:

V. Casey

NOTE: Inductance is measured at 1 KHz, 1 Vrms with specified DC current

DWG CONTROL NO. P-A4-11400
ACAD\MISCX\A3114001.DWG

REV -

POWER INDUCTOR FOR SWITCH MODE POWER SUPPLIES

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

SKC-101~105

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.