



Input voltage range up to 72 V DC
 1 or 2 outputs up to 30 V DC
 3500 V DC I/O electric strength test voltage

- High input to output isolation
- Wide input range
- Short circuit protection

Selection chart

Output 1		Output 2		Input voltage	Rated power	Type	Option
$U_{o\ nom}$ [V DC]	$I_{o\ nom}$ [mA]	$U_{o\ nom}$ [V DC]	$I_{o\ nom}$ [mA]	U_i [V DC]	$T_A = 71^\circ\text{C}$ $P_{o\ tot}$ [W]		
5	500	-	-	9...36	2.5	24 IXP 3-05-7	S
5	500	-	-	18...72	2.5	48 IXP 3-05-7	S
12	250	-	-	9...36	3	24 IXP 3-12-7	S
12	250	-	-	18...72	3	48 IXP 3-12-7	S
15	200	-	-	9...36	3	24 IXP 3-15-7	S
15	200	-	-	18...72	3	48 IXP 3-15-7	S
+5	250	-5	250	9...36	2.5	24 IXP 3-0505-7	S
+5	250	-5	250	18...72	2.5	48 IXP 3-0505-7	S
+12	125	-12	125	9...36	3	24 IXP 3-1212-7	S
+12	125	-12	125	18...72	3	48 IXP 3-1212-7	S
+15	100	-15	100	9...36	3	24 IXP 3-1515-7	S
+15	100	-15	100	18...72	3	48 IXP 3-1515-7	S
5	250	5	250	9...36	2.5	24 IXP 3-05-05-7	-
5	250	5	250	18...72	2.5	48 IXP 3-05-05-7	-
12	125	12	125	9...36	3	24 IXP 3-12-12-7	-
12	125	12	125	18...72	3	48 IXP 3-12-12-7	-
15	100	15	100	9...36	3	24 IXP 3-15-15-7	-
15	100	15	100	18...72	3	24 IXP 3-15-15-7	-

Input

Input voltage	continuous range, 24 V	9...36 V DC
	continuous range, 48 V	18...72 V DC
Reverse voltage protection	shunt diode	

Output

Output voltage setting accuracy	$U_i\ nom, I_o\ nom$	$\pm 2\% U_{o\ nom}$
Minimum load	recommended	20% $I_{o\ nom}$
Line regulation	$U_i\ min...U_i\ max, I_o\ nom$	$\pm 1\% U_{o\ nom}$
Load regulation	$U_i\ nom, 0...100\% I_o\ nom$, single output models	2% $U_{o\ nom}$
	dual output models	max. 3% $U_{o\ nom}$
Output voltage switching noise	$U_i\ nom, 20...100\% I_o\ nom$, peak-peak, total	max. 3% $U_{o\ nom}$
Efficiency	$U_i\ nom, I_o\ nom$	up to 81%

Control and protection

Overload protection	$U_{i \min}$, full load	125% $P_{I \text{ nom}}$
No-load protection		
Remote Shut down	positive logic (floating or high signal = on)	

Safety and EMC

Electric strength test voltage	I/O	3500 V DC
Electromagnetic interference	conducted with external filter	class B

Environmental

Operating ambient temperature	$U_{i \text{ nom}}$, $I_{o \text{ nom}}$	-25...71°C
Storage temperature	non operational	-40...100°C
Relative humidity	non condensing	95%
MTBF	MIL-HDBK-217F, N2	>3'700'000 h

Options


Industry standard pinout	S
--------------------------	---

Accessories

DIN and chassis mounting bracket	
----------------------------------	--

Mechanical data

Tolerances ± 0.3 mm (0.012") unless otherwise indicated.

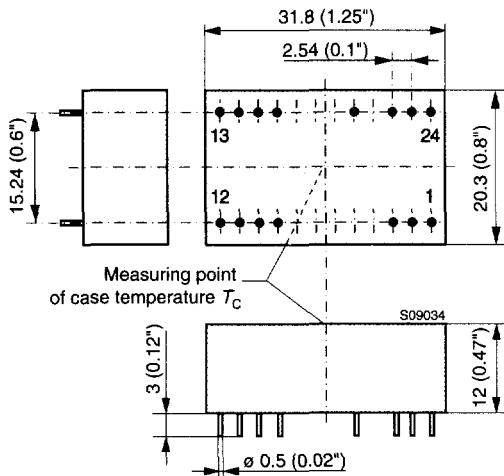

Industry standard

Pin	Single output	Dual output
2	Vi-	Vi-
3	Vi-	Vi-
9	n.c.	COM
10	n.c.	n.c.
11	n.c.	Vo-
14	Vo+	Vo+
15	n.c.	n.c.
16	Vo-	COM
22	Vi+	Vi+
23	Vi+	Vi+

Alternative pinout

Pin	Single output	Dual output	Double output
1	Vi+	Vi+	Vi+
2	Vi+	Vi+	Vi+
9	-	-	Go1
10	-	COM	-
11	-	COM	-
12	Vo-	-	Vo1
13	Vo+	Vo-	Vo2
15	-	Vo+	-
16	-	-	Go2
20	SD	SD	SD
23	Vi-	Vi-	Vi-
24	Vi-	Vi-	Vi-