

MODS-A-6PXC-X-S-PG

TYPE  
-A

POSITIONS/CONTACTS

-6P4C: 6 Pos/4 Con

-6P4C: 6 Pos/4 Con

PLATING

-P: .000015" Au

-H: .000030" Au

-E: .000050" Au

NOTE

SHIELD

S: Shielded

PANEL GROUND




-PG:

PRINT

OBSOLETE

SEE

MODS-A-6PXC-X-XX

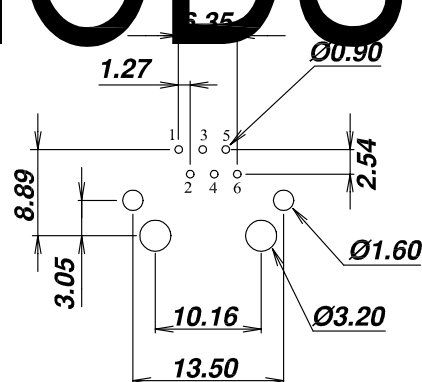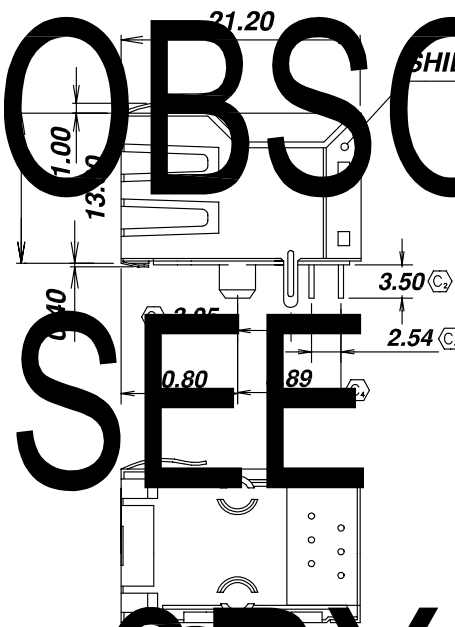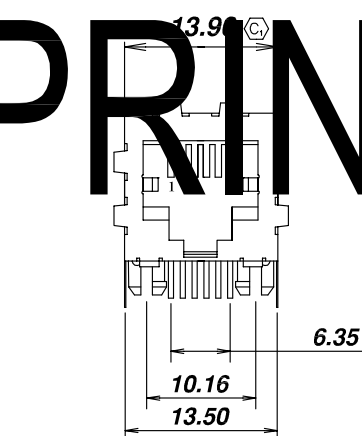

PCB LAYOUT

## NOTES:

1.  $\text{C}$  REPRESENTS A CRITICAL DIMENSION
2. PLATING APPLIES TO MATING AREA, GOLD FLASH ON TAILS.

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS ARE IN MM.  
TOLERANCES ARE:

DECIMALS

X.XX $\pm$ 0.25X.XXX $\pm$ 0.13X.XXXX $\pm$ 0.05

ANGLES

 $\pm 3$ 

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS INFORMATION  
CONFIDENTIAL AND PROPRIETARY TO  
SAMTEC INC. AND SHALL NOT BE  
REPRODUCED OR TRANSFERRED TO  
OTHER DOCUMENTS OR DISCLOSED TO  
OTHERS OR USED FOR ANY PURPOSE  
OTHER THAN THAT FOR WHICH IT WAS  
OBTAINED WITHOUT THE EXPRESSED  
WRITTEN CONSENT OF SAMTEC INC.

**samtec**

520 PARK EAST BLVD. NEW ALBANY, IN 47150  
(812) 944-6733 P.O. BOX 1147 TWX: 810-540-4085

DO NOT SCALE DRAWING

SHEET SCALE: 1:2

INSULATOR: PBT 20% Glass Filled (UL 94V-0) Black  
CONTACT: Phosphor Bronze  
SHELL: Copper Alloy

MAX FLASH ALLOWED: .002  
MAX GATE VESTIGE: .002

F:\DWG\EXISPROD\ASSEMBLY\JO\MODJACKS\MODS

DESCRIPTION:

RJ11 or RJ12 Side Entry PCB Jack

DWG. NO.

MODS-A-6PXC-X-S-PG

BY: J. Riley 12/31/2003

SHEET 1 OF 1

CODE: 55322