

Product Specifications



F2A-PDMDFPM-4F5

FSJ2-50 SureFlex™ Jumper with interface types 7-16 DIN Male and 7-16 DIN Female Panel Mount, 1.37 m



CHARACTERISTICS


General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Panel mount
Cable Family	FSJ2-50
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Female
Length	1.370 m 4.495 ft

Electrical Specifications

DTF, Connector A	-32.00 dB
DTF, Connector B	-32.00 dB

Jumper Assembly Sample Label

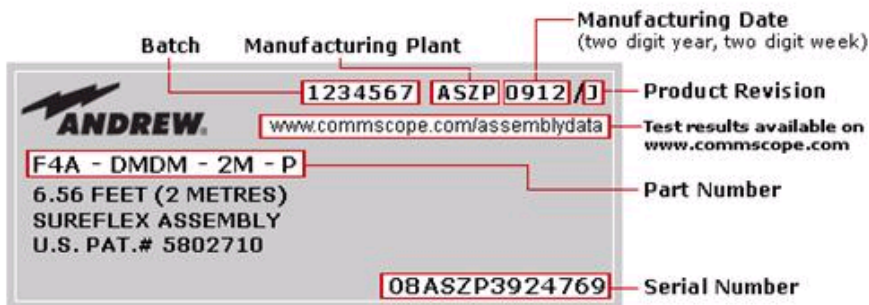

Regulatory Compliance/Certifications

Agency

RoHS 2002/95/EC
China RoHS SJ/T 11364-2006
ISO 9001:2008

Classification

Compliant by Exemption
Above Maximum Concentration Value (MCV)
Designed, manufactured and/or distributed under this quality management system

www.commscope.com/andrew

©2011 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change. See www.commscope.com/andrew for the most current information.

page 1 of 2
6/9/2011

Product Specifications

F2A-PDMDFPM-4F5



INCLUDED PRODUCTS



FSJ2-50

FSJ2-50, HELIAX® Superflexible Foam Coaxial Cable, corrugated copper, 3/8 in, black PE jacket
