


[Home](#) > [Products](#) > [By Type](#) > [Relays](#) > [Product Feature Selector](#) > Product Details

V23054E1015F110 Product Details

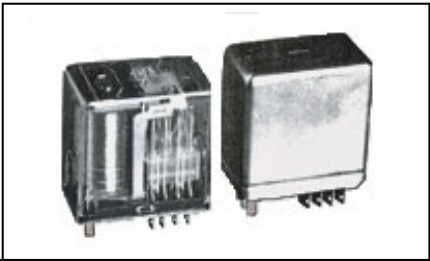

V23054E1015F110
(6-1393813-3)

TE Internal Number: 6-1393813-3

 [Active](#)

Communications/Signal PC Board Relays

[Converted to EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- V23054/Cradle Relay S Series
- DC Actuating System
- Input Voltage = 12 VDC
- Contact Arrangement = 4 Form C, 4PDT, 4 C/O
- Contact Current Rating = 5 Amps.

[View all Features](#)

Quick Links

[Check Pricing & Availability](#)
[Search for Tooling](#)
[Product Feature Selector](#)
[Contact Us About This Product](#)

 [Add to My Part List](#)  [Request Sample](#)  [Find Similar Products](#)  [Buy Product](#)

Documentation & Additional Information	
Product Drawings: • None Available Catalog Pages/Data Sheets: • None Available Product Specifications: • Cradle S Relay Datasheet (PDF, English) Application Specifications: • None Available Instruction Sheets: • None Available CAD Files: • None Available	Additional Information: • Product Line Information Related Products: • Tooling
List all Documents	

Product Features (Please use the Product Drawing for all design activity)	
Product Type Features: • Termination Type = Solder/Plug-In Terminals Electrical Characteristics: • Actuating System = DC • Input Voltage (VDC) = 12 • Contact Current Rating (Amps.) = 5 • Coil Resistance (?) = 130 • Coil Power, Nominal (mW) = 1000 • Dielectric Between Coil and Contacts (V rms) = 500 Body Related Features: • Series = V23054/Cradle Relay S • Polarized = No Contact Related Features: • Mounting Options = Socket • Enclosure = Dust Protected • FCC Part 68 Isolation = No • Approved Standards = None • Contact Base Material = Silver, Gold Overlay • Approx. Dimensions (L x W x H) (mm [in]) = 35.00 x 19.00 x 30.00 [1.378 x .748 x 1.181] • Compatible Socket = With • Contact Type = Single • Pin Configuration = Industry Standard	Configuration Related Features: • Contact Arrangement = 4 Form C, 4PDT, 4 C/O • Coil Magnetic System = Non Polarized, Monostable • Coil Suppression Diode = Without Industry Standards: • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C • RoHS/ELV Compliance History = Converted to comply with RoHS directive Other: • Brand = Axicom

Corporate Information

[Who We Are](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)

Quick Links

[Check Distributor Inventory](#)
[Cross Reference](#)
[Find Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat with Us](#)
[Find a Phone Number](#)
[Search Knowledge Base](#)
[Manage Your Account](#)