


# SURFACE MOUNT LVPECL VCXO

## DFV S11-ELPI

FEATURES	
19.44 TO 200 MHz	
Fundamental mode design	
Low jitter	
APPLICATIONS	
Datacomms	

Function	DFV S11
V control	1
Enable/disable	2
GND	3
Output 1	4
Output 2	5
Vcc	6

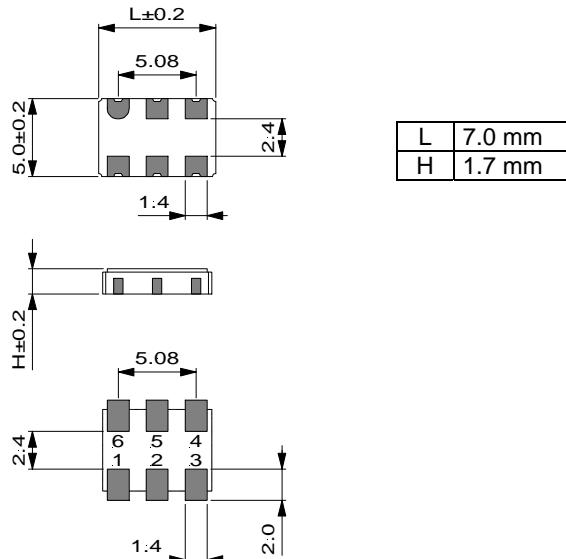

TYPE	DFV S11-ELPI
Frequency Range	19.44 to 200 MHz

ELECTRICAL SPECIFICATIONS	
supply voltage	3.3 V ± 5 %
supply current (no load)	≤ 80 mA
output load	LVPECL ( 50 Ω to 1.3 V )
duty cycle @ 50% level	45/55...55/45 %
rise/fall times ( 20 to 80% )	≤ 2 ns
high/low levels	≥ 2.27 V / ≤ 1.68 V
jitter RMS (12 kHz to 20 MHz)	≤ 1 ps RMS ( f = 155.52 MHz )
enable / disable on pin 2	high or open = enable, low = disable
complementary output on pin 5	180° phase shifted
start up	≤ 10 ms @ 3.15 V

FREQUENCY STABILITY			tolerances [ ppm ]					
Type	temperature range	model code	overall stability	pulling range	function	control voltage		
All models	0 to 70°	50XB25	≤ ± 25	≥ ± 50	positive	1.65 V ± 1.35 V		
		100XB25	≤ ± 25					
		100XB50	≤ ± 50					
	-40 to 85°C	100XE50	≤ ± 50	≥ ± 100				
Remarks			input impedance ≥ 10 kΩ					
			includes 25°C calibration, temperature, Vcc and load changes					

ORDERING CODE	type + option code + frequency + model code					
Example	DFV S11-ELPI 153.6 MHz 100XE50					