


HC-52/U

Quartz Crystal Units AT-Cut, 5 - 300 MHz

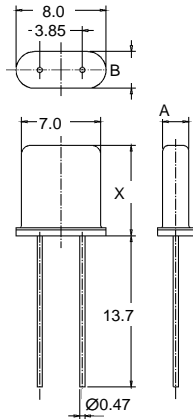

⊗
⊗
⊗

	X	A	B
HC-52/U:	8.8	2.3	3.3
HC-52/8mm:	8.8	2.3	3.3
HC-52/6mm:	6.0	2.3	3.3
HC-52/8mm-SL:	8.0	1.65	2.3
HC-52/6mm-SL:	6.0	1.65	2.3

HC-52/6mm: starting with 15MHz

DIN 45110: N4
IEC 122-3: EB
NFC 93-601: n^o 17
MIL-H-10056: HC-52/U
Welded metal enclosure
(inert atmosphere)
with wire leads

All dimensions in mm (max)

HC-52/U			Temperature Stability in the Temperature Range						Nom. Temp. ± 5°C ¹⁾
			-55°C...+105°C		-20°C...+70°C				
Overtone	Frequency [MHz]	Type	± 50ppm	± 25ppm	± 20ppm	± 10ppm	± 7ppm	± 5ppm	± 2ppm
1.OT	5...10	XS 71xx	01	02	03	04	06	-----	05
	10...35	XS 71xx	01	02	03	04	06	07	05
3.OT	25...100	XS 71xx	11	12	13	14	16	17	15
5.OT	60...160	XS 71xx	21	22	23	24	26	27	25
7.OT	110...210	XS 71xx	31	32	33	34	36	37	35
9.OT	150...300	XS 71xx	41	42	43	44	46	47	45

Calibration tolerance: ± 10 ppm

¹⁾ Nom. Temp. = Nominal temperature for oven application to be given with the order.

Motional Resistance R1

Overtone	Frequency [MHz]	R1max [Ω]
1. OT	5...10	80
1. OT	10...15	50
1. OT	15...20	40
1. OT	20...35	30
3. OT	25...50	100
3. OT	50...100	90
5. OT	60...80	150
5. OT	80...160	100
7. OT	110...210	150
9. OT	150...300	200

Standard resonance for fundamental crystals: load resonance with $C_L = 30 \pm 0.5\text{pF}$
Overtone crystals: series mode

Shunt capacitance: 5...10MHz: $C_0 = 2.2\text{pF} \pm 0.8\text{pF}$
10...300MHz: $C_0 = 3.0\text{pF} \pm 1.0\text{pF}$

Crystal units with different tolerances or additional data upon request.

Modifications:

HC-52-3, HC-52/8mm-3, HC-52/6mm-3: 3rd wire (ground)

HC-52-S, HC-52/8mm-S: 3-point mounting for exposure to extreme accelerations (shock and vibr.)

HC-52-3-S, HC-52/8mm-3-S: 3-point mounting for exposure to extreme accelerations (shock and vibr.),
3rd wire (ground)

SMD-Versions with metal clip.



VECTRON
INTERNATIONAL

A DOVER TECHNOLOGIES COMPANY

166 Glover Avenue
Norwalk, CT 06856

Tel: 1-88-VECTRON-1
Fax: 1-888-FAX-VECTRON
www.vectron.com