

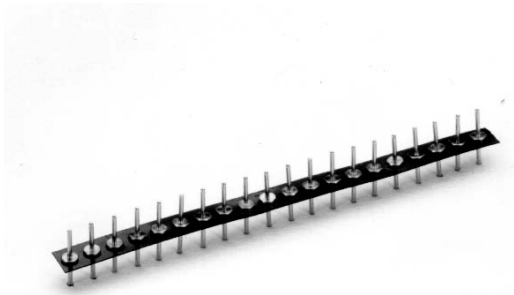


Peel A-Way® Single In-Line Adapters


**Terminal Type
-79 Shown**

Features:

- Peel away terminal carrier after soldering.
- Disposable terminal carrier.
- Complete soldering visibility on both sides of PCB.
- Maximum air flow.
- Better flux rinse.
- No contact pull out due to extraction of terminal carrier.

Terminals:

Terminal: Brass - Copper Alloy (C36000), ASTM-B-16


Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel
 Contact: Gold over Nickel or Tin-Lead over Nickel


Body Material:


KSS - Polyimide Film
 Temp. range -269°C to 400°C
 (-452°F to 752°F)

Terminal Information

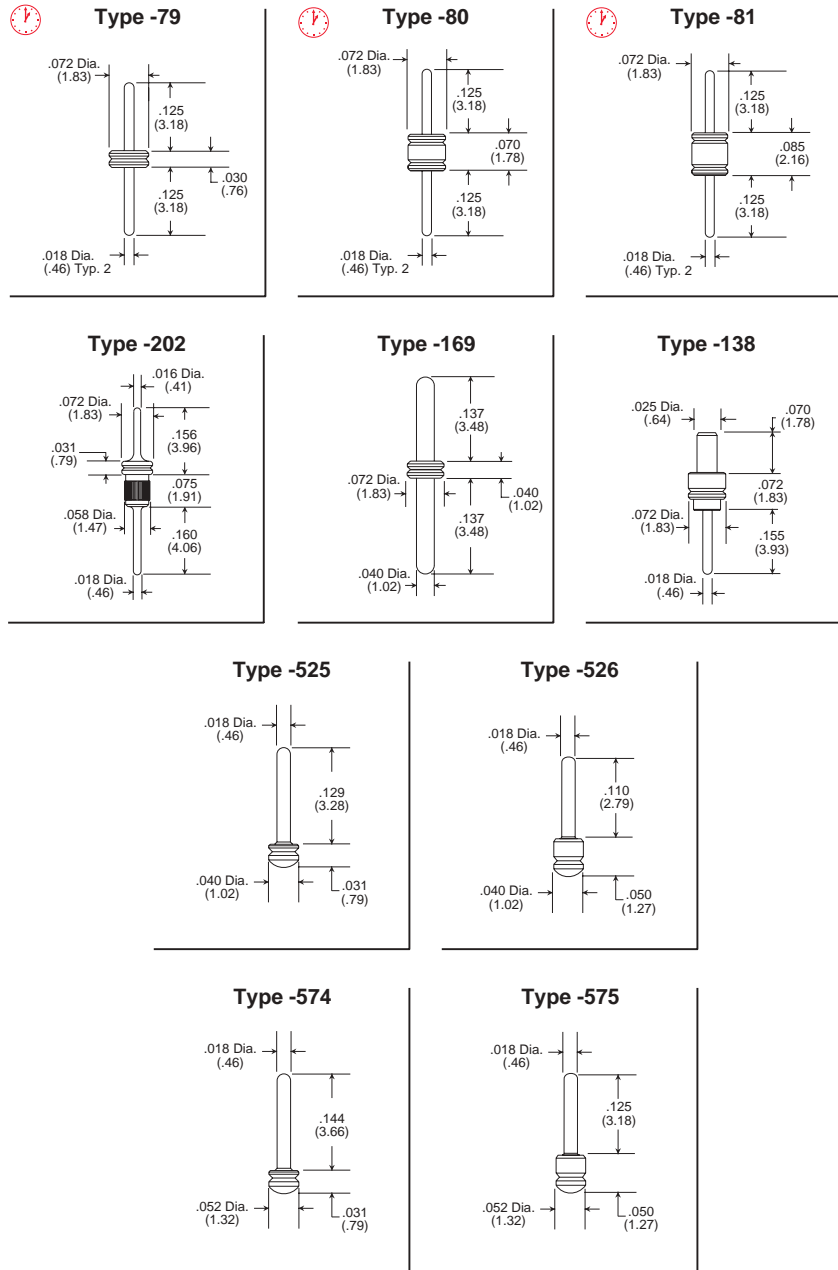

How To Order

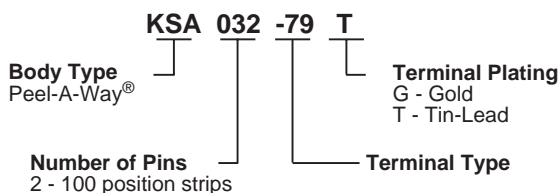

 Quick turn delivery available on standard terminal types.
 Additional terminal types available.
 See terminal section for detailed terminal information.

Peel-A-Way® covered by patent rights issued and/or pending.