

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.4 grams


TO-263(D²-PACK)

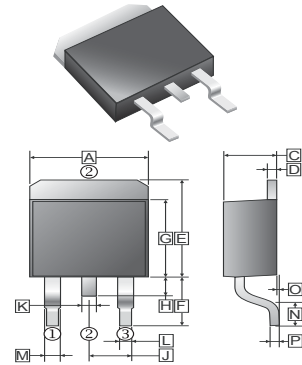

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	9.50	10.50	H	1.50	REF.
C	4.30	4.80	J	2.54	TYP.
D	1.17	1.45	K	-	-
E	9.50	10.50	L	0.71	1.00
F	4.33	5.93	M	1.17	1.47
G	8.50	9.00	P	0.31	0.53

PACKAGE INFORMATION

Package	MPQ	Leader Size
TO-263	0.8K	13' inch



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)


Parameter	Symbol	Rating	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	V
Maximum RMS Voltage	V_{RMS}	28	V
Maximum DC Blocking Voltage	V_{DC}	40	V
Maximum Average Forward Rectified Current	I_F	30	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	250	A
Maximum Instantaneous Forward Voltage @ 15A	V_F	0.6	V
Maximum Reverse Current at Rated VR Per Diode ⁴	I_R	$T_A=25^{\circ}C$	1
		$T_A=100^{\circ}C$	12
Typical Junction Capacitance ¹	C_J	2400	pF
Voltage Rate Of Change	dv / dt	10000	V/us
Typical Thermal Resistance ²	$R_{\theta JA}$	50	°C/W
Typical Thermal Resistance ³	$R_{\theta Jc}$	3	°C/W
Operating & Storage Temperature	T_J, T_{STG}	-55~150	°C

Notes:


1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient.
3. Thermal Resistance Junction to Case.
4. Pulse test: Pulse width 40ms.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

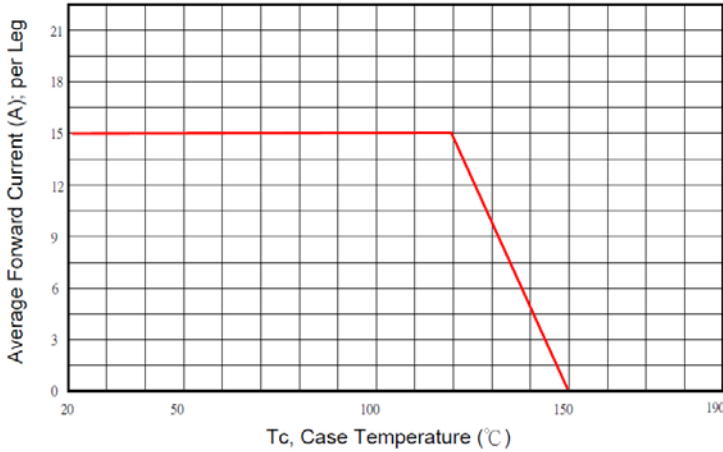


Typical Forward Characteristic

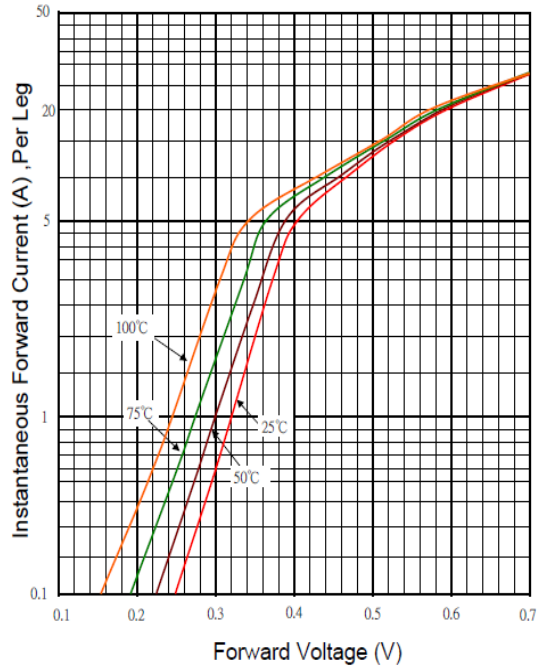

Typical Junction Capacitance

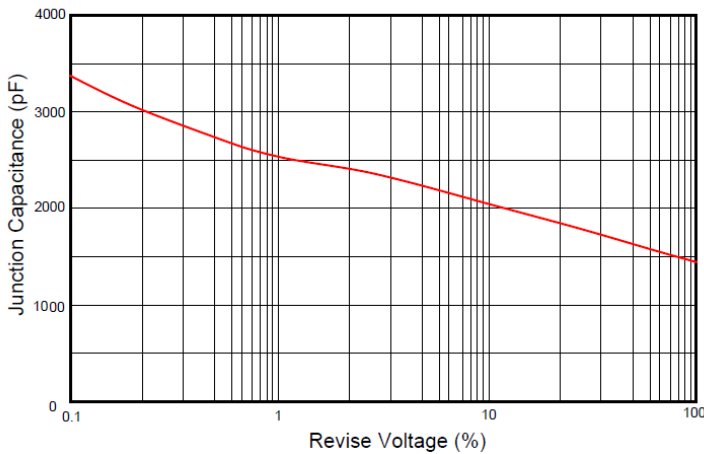

Typical Reverse Characteristic

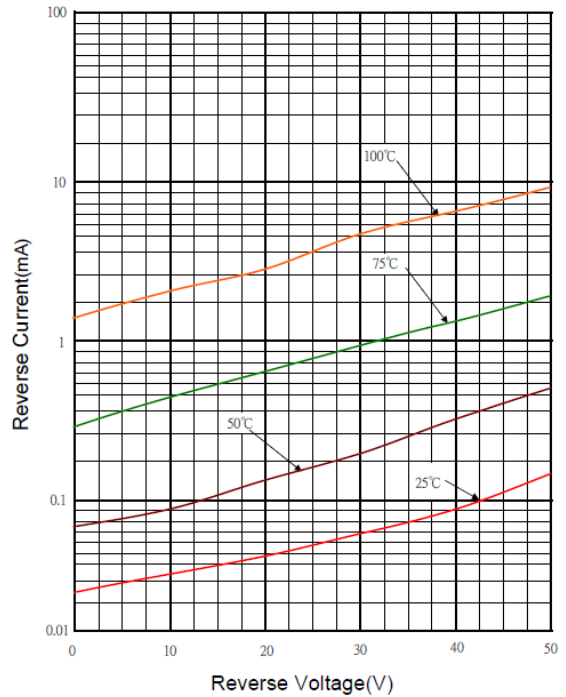

Maximum Non- Repetitive Forward Surge Current

