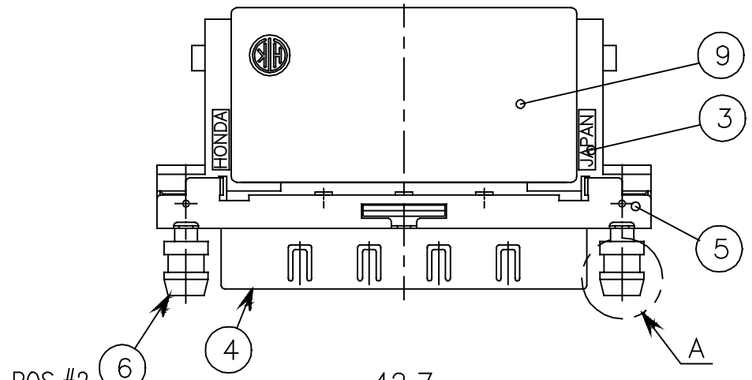

HONDA
PRINT RM
MAR.10.1999
ISSUED

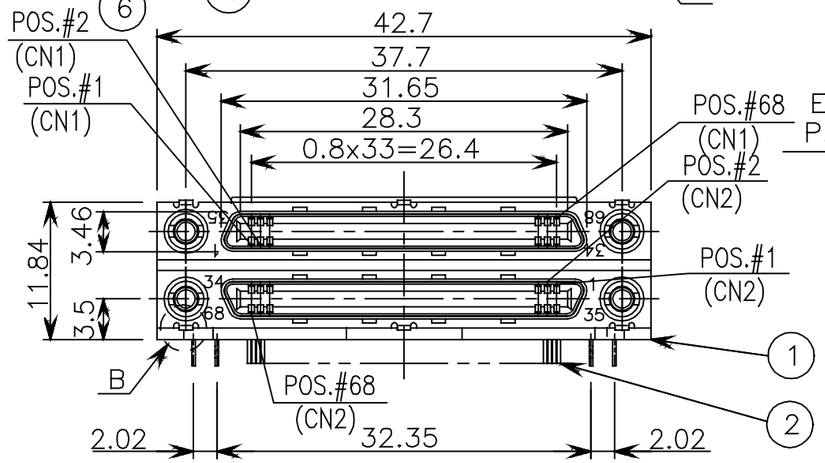

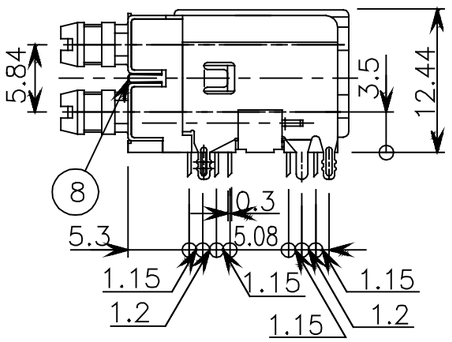

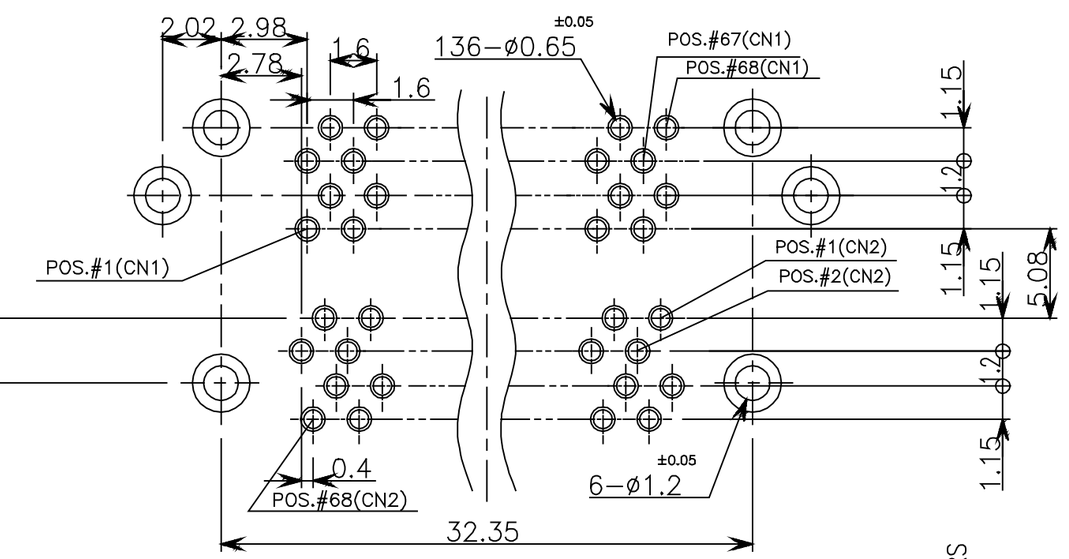

RECOMMENDED P.C.B. LAYOUT
(MOUNT SIDE VIEW)
(SCALE=5/1)

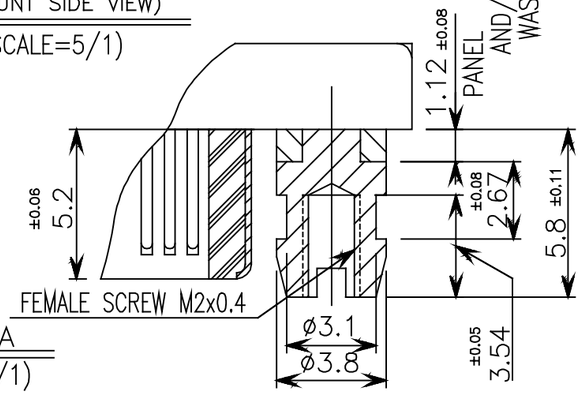

DETAIL A
(SCALE=5/1)

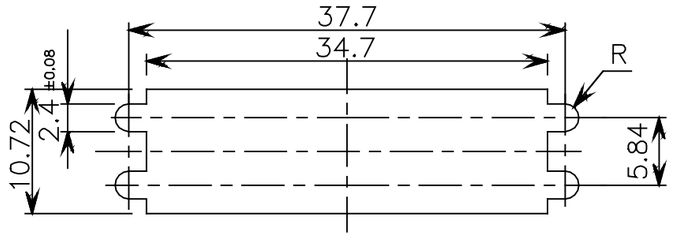

PANEL CUT−OUT DIMENSIONS
(t=1.12 ±0.08)

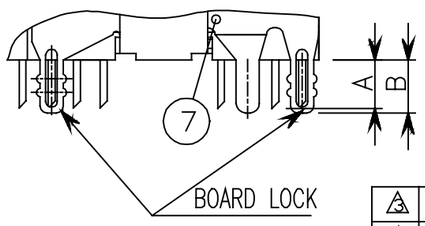

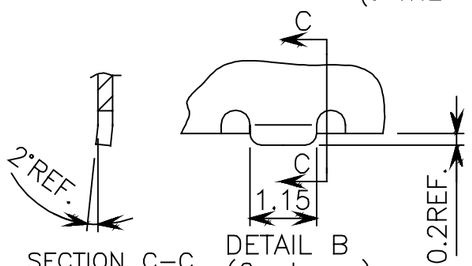

SECTION C−C
DETAIL B
(6 places)

NOTE1.CONTACT PLATING
CONTACT AREA:Pd/Ni0.5μm
+GOLD0.1μmMIN.
TERMINAL AREA:TIN/LEAD2.6~5μm
ALL OVER NICKEL UNDERPLATED

⚠3			
⚠2			
⚠1	MAR.10 1999	H.A	CHANGE P/N.
LTR.	DATE	BY	REV. DESCRIPT

NO.	PART NAME	MATERIAL	QTY	FINISH	NOTE
9	PROTECT COVER	PPS	1		UL94V−0 BLACK
8	SPACER	STEEL	1	NICKEL	
7	BOARD LOCK	PHOSPHOR BRONZE	2	NICKEL	
6	SCREW LOCK	STEEL	4	NICKEL	M2x0.4 ATTACHED PARTS.
5	SQR.NUT	BRASS	4	NICKEL	M2x0.4
4	SHELL	STEEL	2	NICKEL	
3	INSULATOR	PPS	1		UL94V−0 BLACK
2	CONTACT	PHOSPHOR BRONZE	136	SEE NOTE 1	
1	BRACKET	PPS	1		UL94V−0

DATE FEB.2.1999	SCALE 2/1	UNIT mm(INCH)	3RD . A . P

DR	DE.	CHK	CHK	APP.

HONDA TSUSHIN KOGYO., LTD.

NAME	0.8mm SPACING 68POS.R/A DUAL STACKING FEMALE CONNECTOR
PART NO.	HDRA−E68W( )LFD1T1EC−SL REV. 1A ⚠1

'HDRA−E68WLFD1T1ECSEA'

⚠1	HDRA−E68W2LFD1T1EC−SL	3.4	3.6	BROWN
⚠1	HDRA−E68W1LFD1T1EC−SL	2.08	2.28	BLACK
	PART No.	A	B	COLOR OF BRACKET