

## Plug Coupler IEC C20 / IEC J, Screw-on Mounting



Rear side

C20



70° C

**Description**

- Panel Mount:  
Screw-on mounting from front or rear-side
- Appliance Inlet, Pin temperature 70 °C, Protection class I

**Approvals**

- UL License Number: E96454

**References**

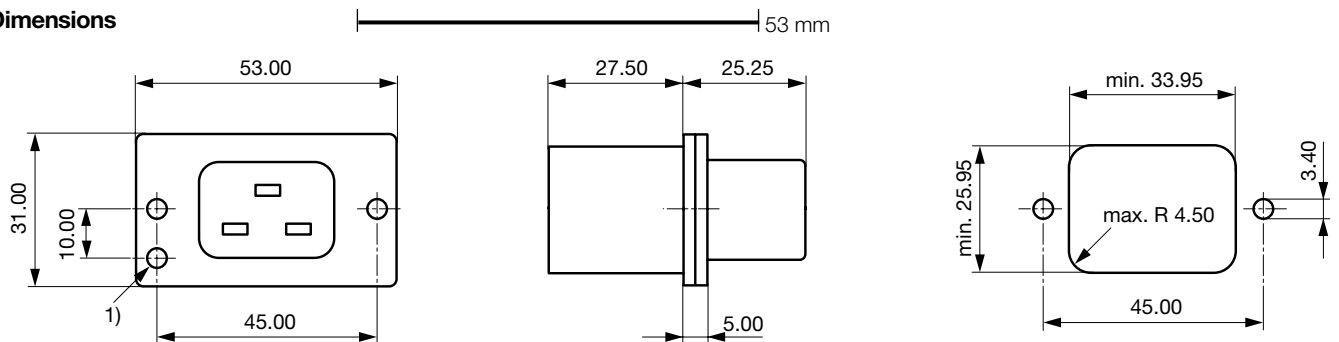
[General Product Information](#)

**Weblinks**

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [Distributor-Stock-Check](#), [Accessories](#)

**Technical Data**

Ratings IEC	16 A / 250 VAC; 50 Hz	Appliance Inlet / Appliance Outlet	C20 acc. to IEC/EN 60320-1 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16 A, Protection Class 1
Ratings UL/CSA	20 A / 125 VAC; 60 Hz		
Dielectric Strength	> 4 kVAC between L-N > 6 kVAC between L/N-PE (1 min/50Hz)		
Allowable Operation Temp.	-25 °C to 70 °C		
Degree of Protection	from front side IP 40 acc. to IEC 60529 from rear-side IP 40 acc. to IEC 60529		
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140		
Panel Thickness s	Screw: Mounting screw torque max 0.5 Nm		
Material: Housing	Thermoplastic, black, UL 94V-0		

**Dimensions**

1) Orientation hole

**Variants**

Panel mounting	Panel Thickness s [mm]	Order Number
Screw	8	4730.0100

**Packaging unit** 100 Pcs

## Mating Inlets/Plugs

### Category / Description

[Plug Overview complete](#)



IEC Plug I, Cord Connector (Rewireable), Straight	0106
IEC Plug I, Cord Connector (Rewireable), Straight	0922
IEC Plug I, Cord Connector (Rewireable), Angled	1611
IEC Plug I, Cord Connector (Rewireable), Straight	1612
IEC Plug I, Cord Connector (Rewireable), Angled	4789
<a href="#">Plug further types to 4730</a>	...

## Mating Outlets/Connectors

[Connector Overview complete](#)



IEC Connector C19, Rewireable, Straight	0104
IEC Connector C19, Rewireable, Angled	1651
IEC Connector C19, Rewireable, Straight	1652
IEC Connector C19, Rewireable, Angled	4790
IEC Connector C19, Rewireable, Straight	4795

[Connector further types to 4730](#)

[Power Cord Overview complete](#)



Power Cord with IEC Connector C19, Straight	1654
---	------

[Power Cord further types to 4730](#)

[Power Supply or Interconnection Cord Overview complete](#)



Divers Power Supply and Interconnection Cords 10 A	4300.0920
Divers Power Supply and Interconnection Cords 16 A	6009.5195

[Power Supply or Interconnection Cord further types to 4730](#)