

STANDARD TVS COMPONENTS

APPLICATIONS

- ✓ Noise Suppression for Data Lines
- ✓ Laptop Computers
- ✓ Personal Digital Assistant (PDA)
- ✓ Digital Cameras
- ✓ Cellular Phones

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD)
- ✓ 61000-4-4 (EFT)

FEATURES


- ✓ ESD Protection
- ✓ 10 Watts Peak Pulse Power per Line ($t_p=10/1000\mu s$)
- ✓ Bidirectional Configuration
- ✓ Protects One Data Line
- ✓ Low Clamping Voltage
- ✓ Low Capacitance
- ✓ Easy Placement for Manufacturing
- ✓ RoHS Compliant

MECHANICAL CHARACTERISTICS

- ✓ DFN-2CF Package
- ✓ Weight 0.8 milligrams (Approximate)
- ✓ Available in Lead-Free Pure-Tin Plating
- ✓ Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481
- ✓ Device Marking: Marking Code

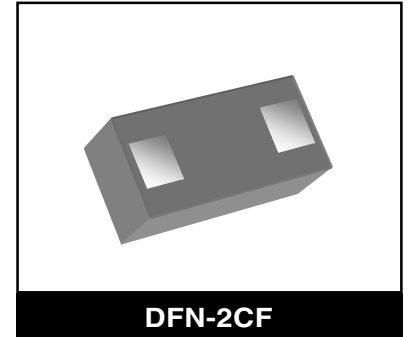

PIN CONFIGURATION



PRSB6.8CF

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Operating Temperature	T_A	-50 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C
Junction Temperature	T_J	150	°C
Peak Pulse Power (tp = 10/1000µs) - See Figure 1	P_{PP}	10	Watts
Power Dissipation	P	150	mW

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER	DEVICE MARKING CODE	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM LEAKAGE CURRENT @ 3.5V I_b µA	TYPICAL CAPACITANCE @ 0V, 1 MHz C pF
PRSB6.8CF	A	4.7	5.7	1	15

GRAPHS

FIGURE 1
PEAK PULSE POWER VS PULSE TIME


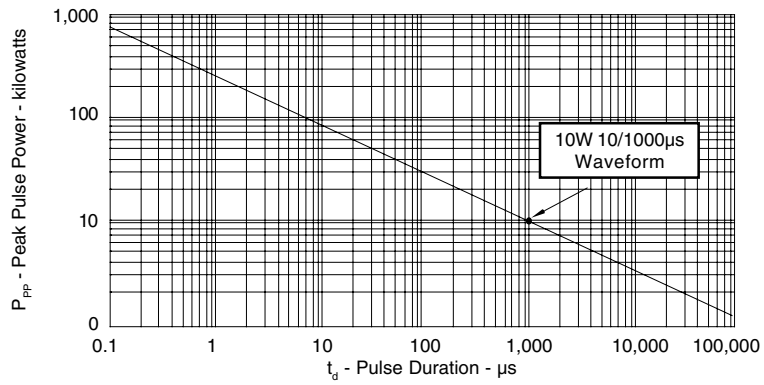


FIGURE 2
PULSE WAVE FORM

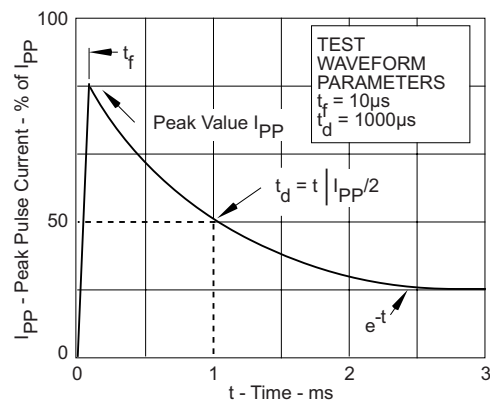

PRSB6.8CF

DFN-2CF PACKAGE OUTLINE & DIMENSIONS

PACKAGE OUTLINE

MOUNTING PAD

PACKAGE DIMENSIONS

DIM	INCHES			MILLIMETERS		
	MIN	NOR	MAX	MIN	NOR	MAX
A	0.036	0.039	0.042	0.914	0.991	1.067
B	0.020	0.023	0.025	0.508	0.584	0.635
C	0.015	0.017	0.020	0.381	0.432	0.508
H	0.0015	0.002	0.0025	0.038	0.051	0.064
m	0.008	0.009	0.010	0.203	0.228	0.254
L1	0.010	0.012	0.014	0.254	0.304	0.356
L2	0.010	0.012	0.014	0.254	0.304	0.356
L3	0.010	0.012	0.014	0.254	0.304	0.356

NOTES

- Controlling dimensions in inches.
- Decimal tolerances for mounting pad : $\pm 0.003"$ ($\pm 0.08\text{mm}$).
- Maximum size: 0.042" by 0.025"

PAD DIMENSIONS

DIM	MILLIMETERS	INCHES
a	0.762 ± 0.025	0.030 ± 0.001
b	0.356 ± 0.025	0.014 ± 0.001
c	0.381 ± 0.025	0.015 ± 0.001
e	1.473 ± 0.050	0.058 ± 0.002
f	0.559 ± 0.025	0.022 ± 0.001
d	0.25 - 0.30	0.010 - 0.012

TAPE & REEL ORIENTATION

NOTE

- Top view of tape. Solder PADS face down in tape package.


TAPE & REEL ORDERING NOMENCLATURE

- Surface mount product is taped and reeled in accordance with EIA-481.
- Suffix -T75 = 7 Inch Reel - 5,000 pieces per 8mm tape, i.e., *PRSB6.8CF-T75*.
- Suffix -LF = Lead-Free, Pure-Tin Plating, i.e., *PRSB6.8CF-LF*.

Outline & Dimensions: Rev 0 - 1/07, 06072

Tape & Reel Specifications (Dimensions in millimeters)

Reel Dia.	Tape Width	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
178mm (7")/330mm (13")	8mm	0.80 ± 0.10	1.20 ± 0.10	0.70 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

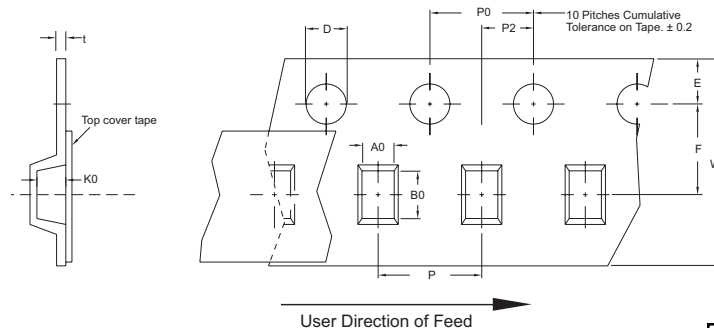

COPYRIGHT © ProTek Devices 2007

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
 2929 South Fair Lane, Tempe, AZ 85282
 Tel: 602-431-8101 Fax: 602-431-2288
 E-Mail: sales@protekdevices.com
 Web Site: www.protekdevices.com