


FEATURES

- Automatically restarts microprocessor after power failure
- Maintains reset for 350 ms after V_{CC} returns to an in-tolerance condition
- Accurate 5%, 10% or 15% microprocessor 5V power supply monitoring
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 package or surface mount SOT-223 package
- Internal 5 k Ω pull-up resistor
- Compatible with Motorola 68XXX series and HC16 Microprocessors
- Operating temperature of -40°C to +85°C

PIN ASSIGNMENT



BOTTOM VIEW
TO-92 PACKAGE
See Mech.
Drawings Section
On Website



TOP VIEW
SOT-223 PACKAGE
See Mech.
Drawings Section
On Website

PIN DESCRIPTION


PIN 1	<u>GROUND</u>
PIN 2	<u>RESET</u>
PIN 3	V_{CC}
PIN 4	GROUND (SOT-223 ONLY)

DESCRIPTION

The DS1233D EconoReset uses a precision temperature-compensated reference and comparator circuit to monitor the status of the power supply (V_{CC}). When an out-of-tolerance condition is detected, an internal power-fail signal is generated which forces reset to the active state. When V_{CC} returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 350 ms to allow the power supply and processor to stabilize.

OPERATION - POWER MONITOR

The DS1233D provides the functions of detecting out-of-tolerance power supply conditions and warning a processor-based system of impending power failure. When V_{CC} is detected as out of tolerance as defined by the tolerance of the part selected, the RST signal is asserted. On power-up, RST is kept active for approximately 350 ms after the power supply has reached the selected tolerance. This allows the power supply and microprocessor to stabilize before RST is released.

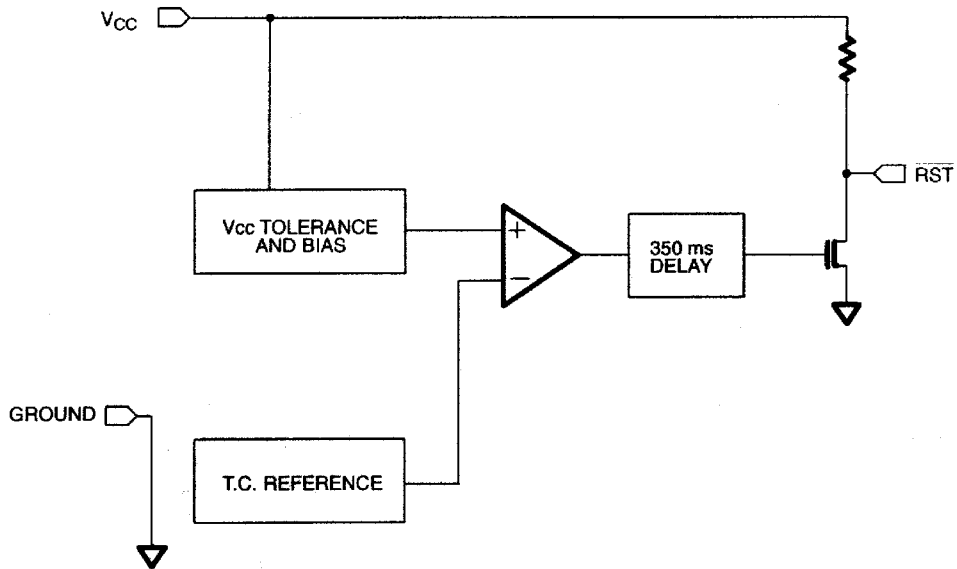BLOCK DIAGRAM Figure 1**APPLICATION EXAMPLE Figure 2**

POWER UP Figure 3**POWER DOWN Figure 4**

ABSOLUTE MAXIMUM RATINGS*

Voltage on V_{CC} Pin Relative to Ground	-0.5V to +7.0V
Voltage on I/O Relative to Ground	-0.5V to $V_{CC} + 0.5V$
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C
Soldering Temperature	260°C for 10 seconds

* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS (-40°C to +85°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Supply Voltage	V_{CC}	1.2	5.0	5.5	V	1

DC ELECTRICAL CHARACTERISTICS (-40°C to +85°C; $V_{DD} = 5V \pm 10\%$)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Low Level @ \overline{RST}	V_{OL}			0.4	V	1
Output Current @ 0.4V	I_{OL}	+8			mA	2
Operating Current	I_{CC}			50	μA	
V_{CC} Trip Point 5%	V_{CCTP1}	4.5	4.625	4.74	V	1
V_{CC} Trip Point 10%	V_{CCTP2}	4.25	4.375	4.49	V	1
V_{CC} Trip Point 15%	V_{CCTP3}	4.0	4.125	4.24	V	1
Output Capacitance	C_{OUT}			10	pF	
Internal Pull-Up Resistor	R_P	3.75	5	6.25	k Ω	

AC ELECTRICAL CHARACTERISTICS (-40°C to +85°C; $V_{CC} = 5V \pm 10\%$)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Reset Active Time	t_{RST}	250	350	450	ms	
V_{CC} Detect to \overline{RST}	t_{RPD}			100	ns	
V_{CC} Slew Rate (4.75V - 4.00V)	t_F	300			μs	
V_{CC} Slew Rate (4.00V - 4.75V)	t_R	0			ns	
V_{CC} Detect to RST	t_{RPU}	250	350	450	ms	

NOTES:

- All voltages are referenced to ground.
- A 1 k Ω external resistor may be required for proper operation of the microprocessor reset control circuit.

ECONORESET SELECTION GUIDE

		VCC TRIP POINT			PUSHBUTTON DETECT		
		MIN	TYP	MAX	MIN	TYP	MAX
5V	DS1233-15	4.0	4.125	4.24	2.4	-	3.3
	DS1233-10	4.25	4.375	4.49	2.4	-	3.3
	DS1233-5	4.5	4.625	4.75	2.4	-	3.3
	DS1233D-15	4.0	4.125	4.24	N/A		N/A
	DS1233D-10	4.25	4.375	4.49	N/A		N/A
	DS1233D-5	4.5	4.625	4.75	N/A		N/A
	DS1833-15	4.0	4.125	4.24	N/A		N/A
	DS1833-10	4.25	4.375	4.49	N/A		N/A
	DS1833-5	4.5	4.625	4.75	N/A		N/A
3.3V	DS1233A-15	2.64	2.72	2.80	1.8	-	3.0
	DS1233A-10	2.8	2.88	2.97	1.8	-	3.0



 SITE
SEARCH

 PART NO.
SEARCH

WHAT'S NEW

PRODUCTS

SOLUTIONS

DESIGN

APPNOTES

SUPPORT

BUY

COMPANY

MEMBERS

DS1233D

Part Number Table

Notes:

1. See the [DS1233D QuickView Data Sheet](#) for further information on this product family or download the [DS1233D full data sheet](#) (PDF, 128kB).
2. Other options and links for purchasing parts are listed at: <http://www.maxim-ic.com/sales>.
3. [Didn't Find What You Need?](#) Ask our applications engineers. Expert assistance in finding parts, usually within one business day.
4. Part number suffixes: T or T&R = tape and reel; + = RoHS/lead-free; # = RoHS/lead-exempt. More: See [full data sheet](#) or [Part Naming Conventions](#).
5. * Some packages have variations, listed on the drawing. "PkgCode/Variation" tells which variation the product uses.

Part Number	Notes	Free Sample	Buy Direct	Package: TYPE PINS SIZE DRAWING CODE/VAR *	Temp	RoHS/Lead-Free? Materials Analysis
DS1233DZ-5/T&R/C07			<input type="checkbox"/>	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233DZ-5/T&R/C06			<input type="checkbox"/>	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233DZ-5/T&R/C03			<input type="checkbox"/>	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233DZ-15/T&R/C02			<input type="checkbox"/>		-40C to +85C	RoHS/Lead-Free: No
DS1233DZ-5	5V-5% Monitor		<input type="checkbox"/>	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233DZ-10	5V-10% Monitor	<input type="checkbox"/>	<input type="checkbox"/>	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233DZ-15	5V-15% Monitor	<input type="checkbox"/>	<input type="checkbox"/>	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233DZ-10+T&R	5V-10% 2500/Reel		<input type="checkbox"/>	ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis

DS1233DZ-15+T&R	5V-15% 2500/Reel			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233DZ-5+T&R	5V-5% 2500/Reel			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233DZ-5+				ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233DZ-15/T&R	5V-15% 2500/Reel			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233DZ-10/T&R	5V-10% 2500/Reel			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233DZ-5/T&R	5V-5% 2500/Reel			ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233DZ-10+				ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233DZ-15+				ST223;3 pin;137 Dwg: 56-G0005-001A (PDF) Use pkgcode/variation: K3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233D-5+T&R	5V-5% 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3+4*	0C to +70C	RoHS/Lead-Free: Yes Materials Analysis
DS1233D-5/T&R	5V-5%, 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4*	0C to +70C	RoHS/Lead-Free: No Materials Analysis
DS1233D-15	5V-15% Monitor			TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233D-15/T&R	5V-15%, 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233D-10+				TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233D-5+				TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233D-10/T&R	5V-10% 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3-4*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233D-5	5V-5% Monitor			TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis

DS1233D-10	5V-10% Monitor			TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3-1*	-40C to +85C	RoHS/Lead-Free: No Materials Analysis
DS1233D-15+T&R	5V-15% 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3+4*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233D-10+T&R	5V-10% 2000/Reel			TO92;3 pin;185 Dwg: 56-G0006-003A (PDF) Use pkgcode/variation: Q3+4*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis
DS1233D-15+				TO92;3 pin;185 Dwg: 56-G0006-001A (PDF) Use pkgcode/variation: Q3+1*	-40C to +85C	RoHS/Lead-Free: Yes Materials Analysis

[Didn't Find What You Need?](#)

[CONTACT US: SEND US AN EMAIL](#)