


DESCRIPTION

The IP1523 is a dual output voltage series regulator with output on/off control function. The nominal output voltages are 3.3V and 2.0V, respectively. The 3.3V regulator can provide the output current up to 550mA. While the 2.0V regulator can provide up to 500mA. When the IP1523 becomes off, all the output voltages are shut down.

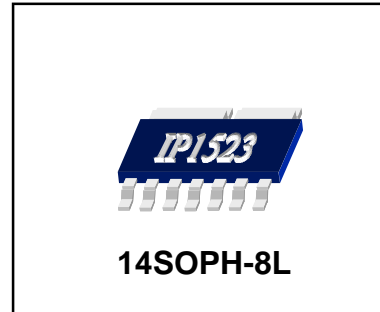


FEATURES

- 1-Fixed 3.3V Regulator with Internal NPN TR.
- 1-Fixed 2.0V Regulator with Internal NPN TR.
- Built-in TSD circuit.
- Built-in Current Limit Circuit.
- Built-in ON/OFF Control Circuit.
- Built-in Over Voltage Protection Circuit.
- Outputs Trimmed to +/-3% Tolerance


ORDERING INFORMATION

Device	Package	Operating Temp
IP1523	14SOPH-8L	-35°C ~ +85°C

BLOCK DIAGRAM

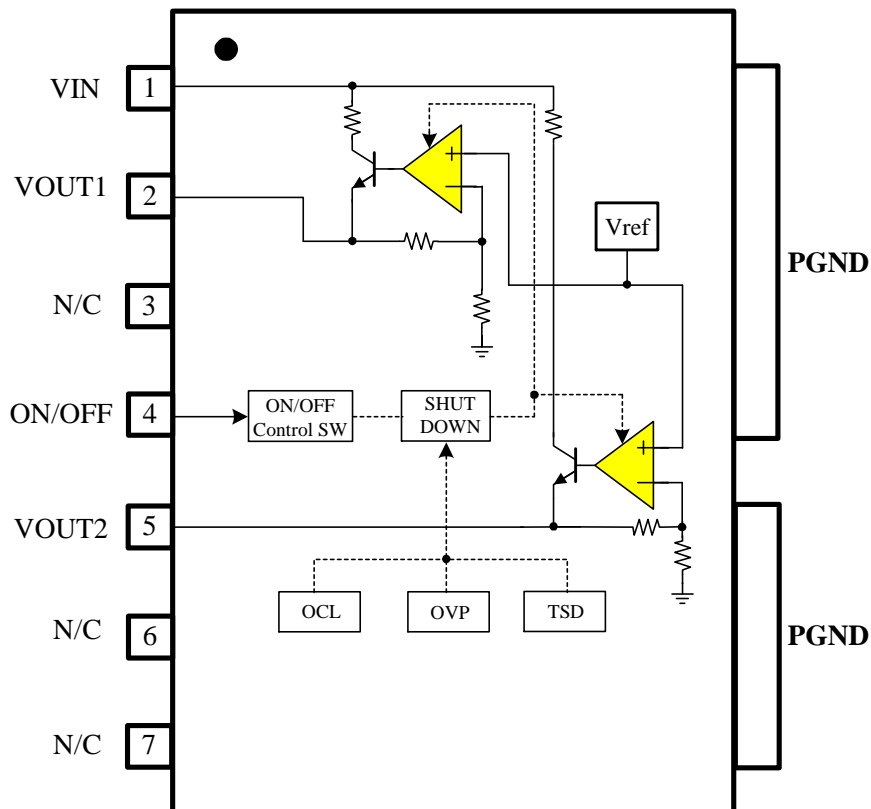

PIN CONNECTIONS

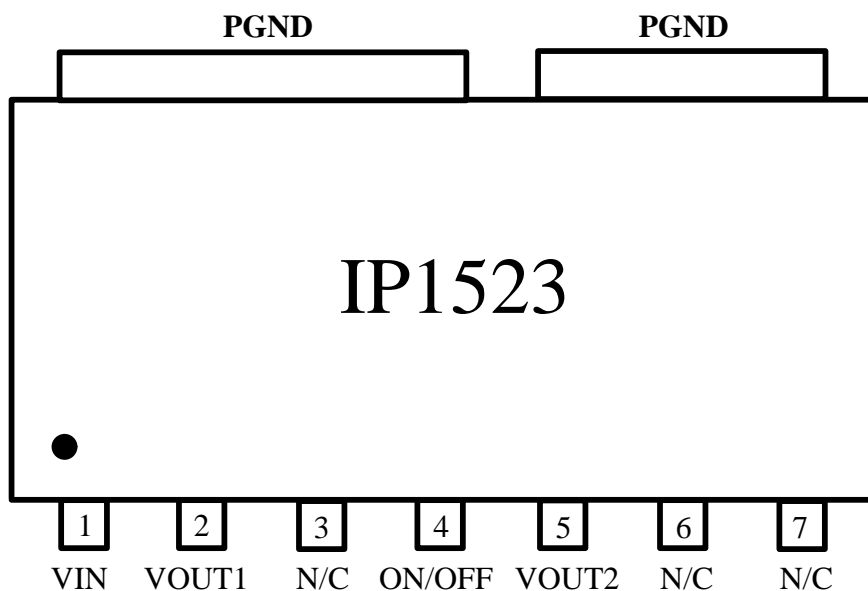

PIN DESCRIPTIONS

NO	SYMBOL	I/O	DESCRIPTION
1	VIN	I	Input Supply Voltage
2	VOUT1	O	Reg +3.3V Output
3	N/C	-	No Connection
4	ON/OFF	I	ON/OFF Control
5	VOUT2	O	Reg +2.0V Output
6	N/C	-	No Connection
7	N/C	-	No Connection
8	PGND	-	Power Ground


ABSOLUTE MAXIMUM RATINGS(TA=25°C)

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Maximum supply voltage	Vinmax	10	V
ON/OFF voltage	Vonoff	10	V
Power dissipation	Pd	3.5*	W
Operating temperature	Topr	-35 ~ +85	°C
Storage temperature	Tstr	-55 ~ +150	°C
Maximum output current	Iomax	700	mA

Note>

1. When mounted on 100mm X 100mm X 1mm PCB (Phenolic resin material).
2. Power dissipation reduces 28mW/°C for using above Ta=25°C
3. Do not exceed Pd and SOA.

POWER DISSIPATION CURVE

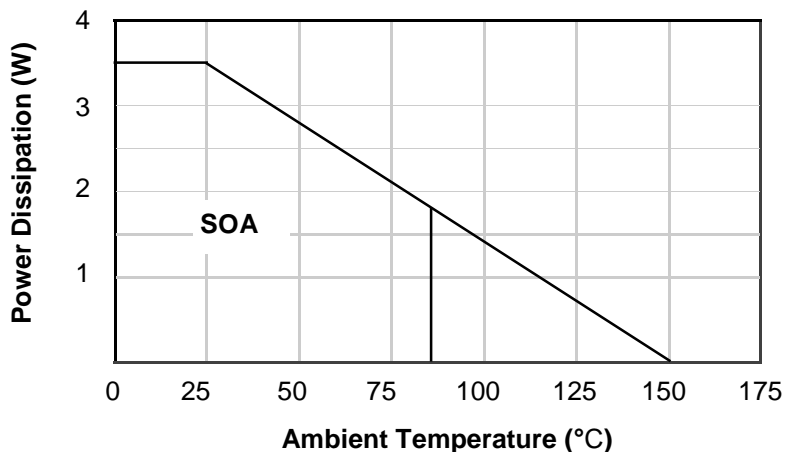

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Supply voltage	Vcc	4.5 ~ 6.0	V
Input voltage	Vin	4.5 ~ 6.0	V

ELECTRICAL CHARACTERISTICS

(Vin= 5.25V, Co=10uF, Ta = 25°C, unless otherwise specified.)

Characteristics	Symbol	Condition	Min.	Typ.	Max.	Units
Quiescent current	Icc	Vcc=5.25V, No-Load	-	7	12	mA
OVP Detecting Voltage	Vovp	Vcc=Variable	6.5	-	-	V
3.3V REGULATOR PART						
Output Voltage	Vout1	Io=10mA	3.2	3.3	3.4	V
Line Regulation	dVline1	Vin=4.5~6V, Io=10mA	-	0.035	0.2	%
Load Regulation	dVload 1	Vin=5.25V, 10mA < Io < 500mA	-	0.4	0.8	%
Dropout voltage	Vdrop1	Io=500mA	-	1.1	1.3	V
Ripple rejection	RR1	F=120Hz, Co=10uF Tantalum (Vin-Vout)=3V, Io=200mA	60	70	-	dB
Current limit ^{*Note}	Ilimit1	Vin-Vout=2.5V	550	-	-	mA
Temperature stability	Temp1	-	-	0.5	-	%
Output noise voltage 1	Vn1	Io=300mA	-	100	-	uV
2.0V REGULATOR PART						
Output Voltage	Vout2	Io=10mA	1.94	2.0	2.06	V
Line Regulation	dVline2	Vin=4.5~6V, Io=10mA	-	0.035	0.2	%
Load Regulation	dVload2	Vin=5.25V, 10mA < Io < 300mA	-	0.4	0.8	%
Dropout voltage	Vdrop2	Io=300mA	-	1.7	2.1	V
Ripple rejection	RR2	F=120Hz, Co=10uF Tantalum (Vin-Vout)=3V, Io=100mA	60	70	-	dB
Current limit ^{*Note}	Ilimit2	Vin-Vout=3.0V	500	-	-	mA
Temperature stability	Temp2	-	-	0.5	-	%
Output noise voltage 2	Vn2	Io=150mA	-	100	-	uV

ELECTRICAL CHARACTERISTICS (Continued)

(Vin= 5.25V, Co=10uF, Ta = 25°C, unless otherwise specified.)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Units
ON/OFF CONTROL PART						
On voltage	Von	Vout=Enabled	-	-	0.8	V
Off voltage	Voff	Vout=Disabled	2.0	-	-	V

* Note



Don't exceed following the current limit.

(Iout1 : 550 mA, Iout2 : 500 mA)


TYPICAL APPLICATION CIRCUIT

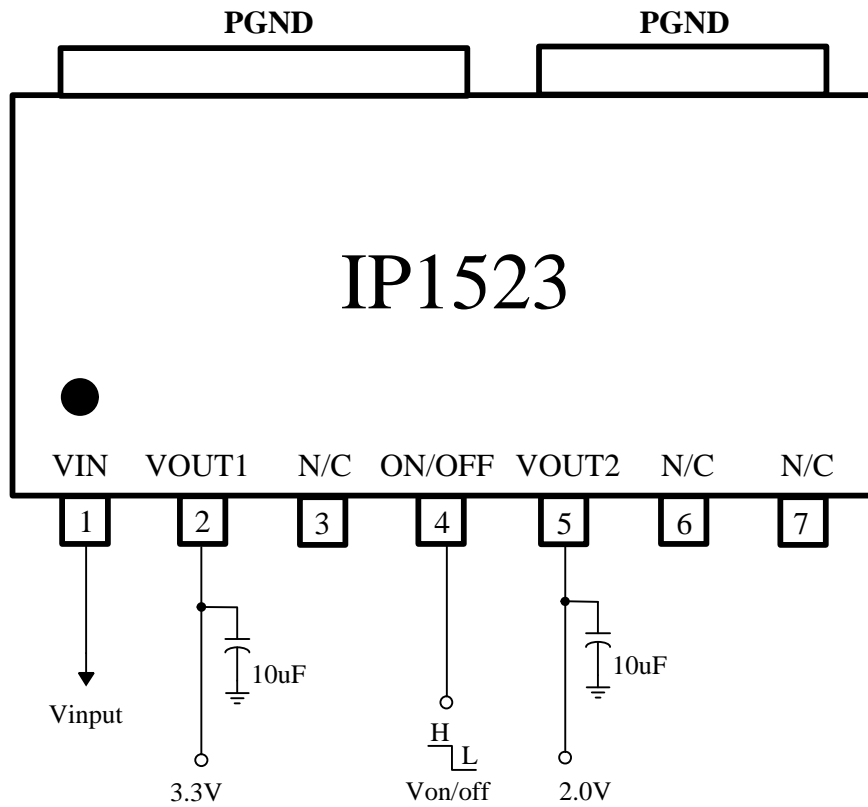

INTERNAL CIRCUIT

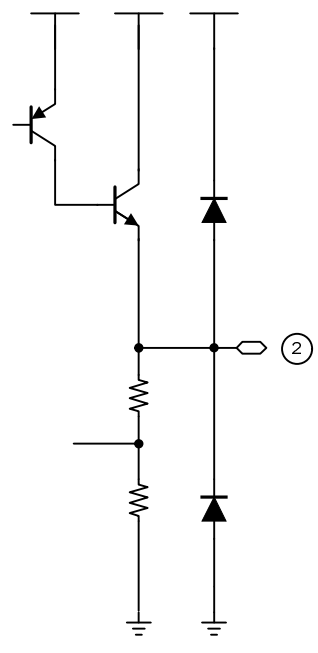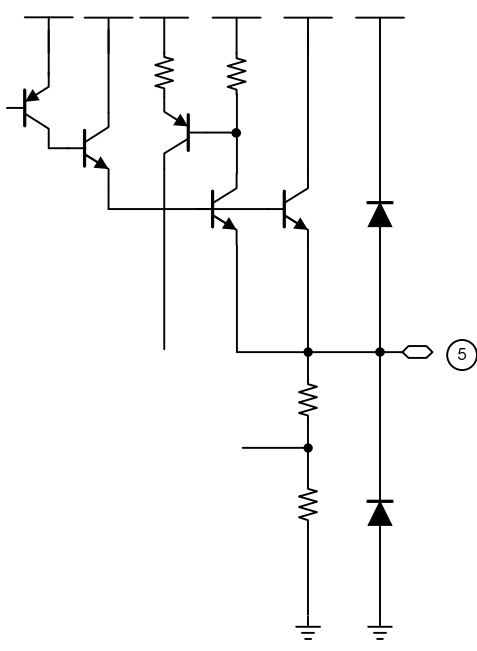
Pin no	Pin name	Internal circuit
2	Regulator output1	
5	Regulator Output2	

INTERNAL CIRCUIT (Continued)

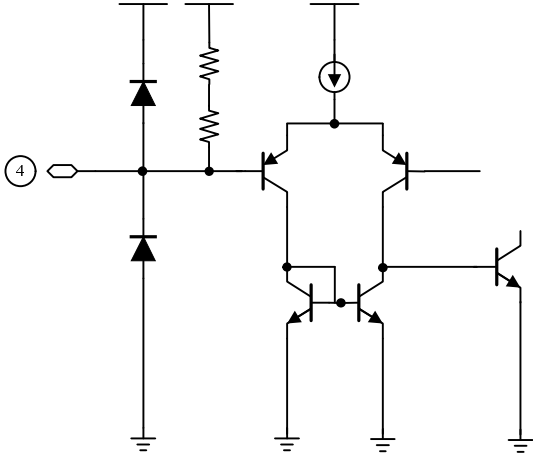
Pin no	Pin name	Internal circuit
4	ON / OFF	

ELECTRICAL CHARACTERISTICS CURVES



QUIESCENT CURRENT

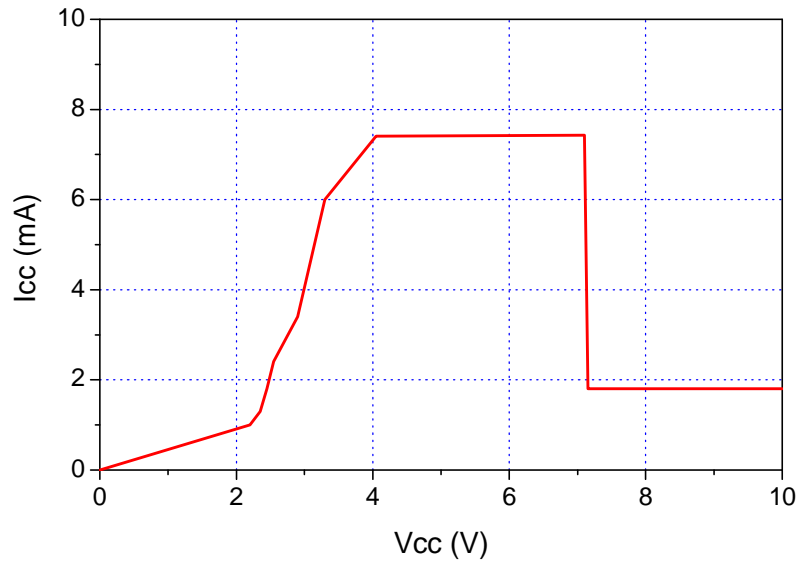



VREF TEMPERATURE STABILITY

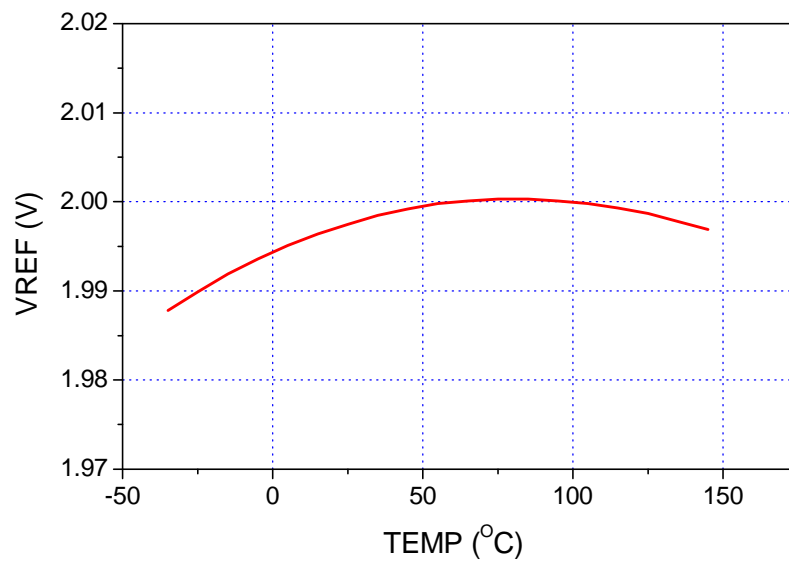



ELECTRICAL CHARACTERISTICS CURVES (Continued)

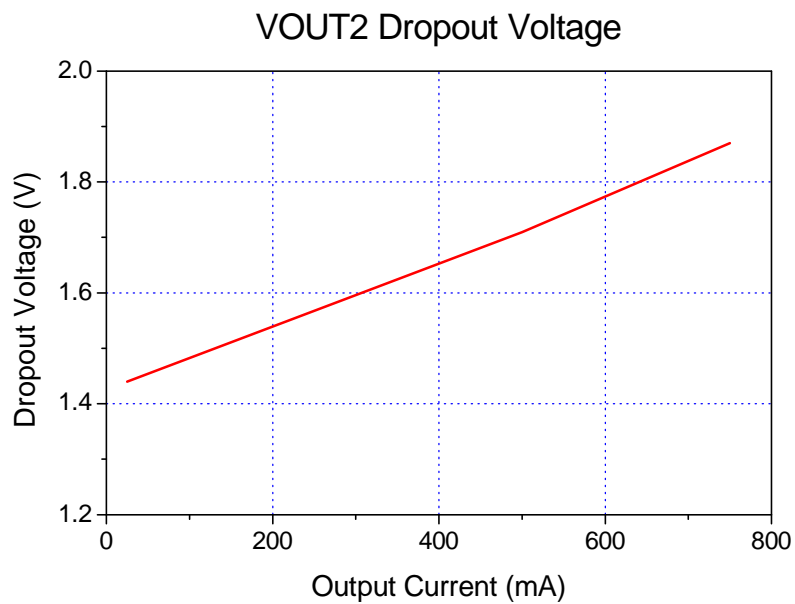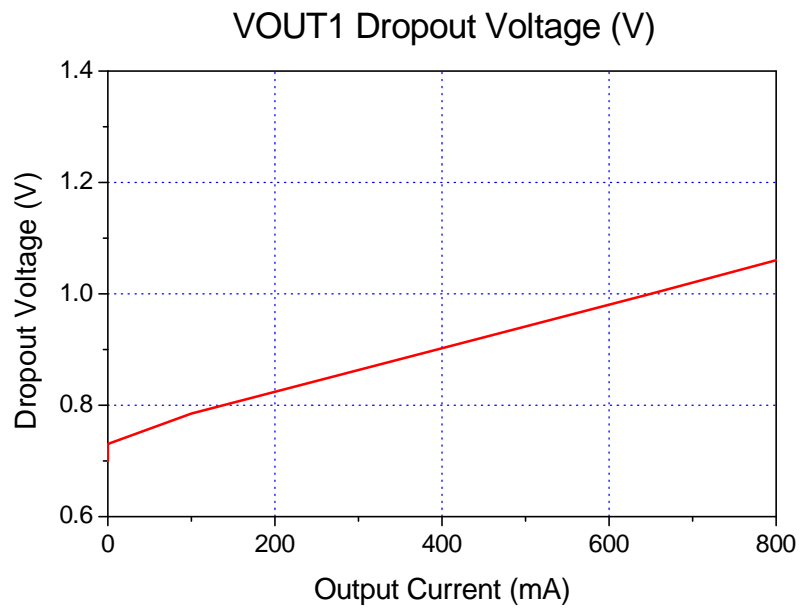

ELECTRICAL CHARACTERISTICS CURVES (Continued)

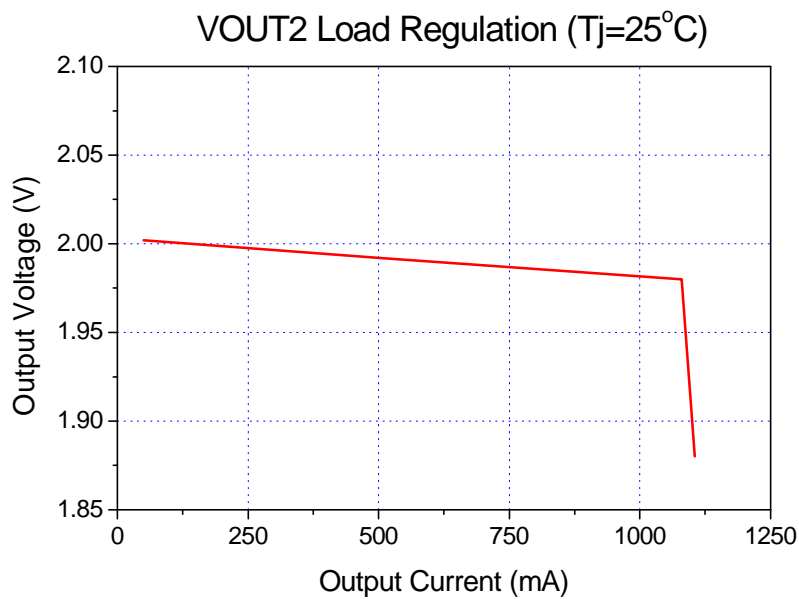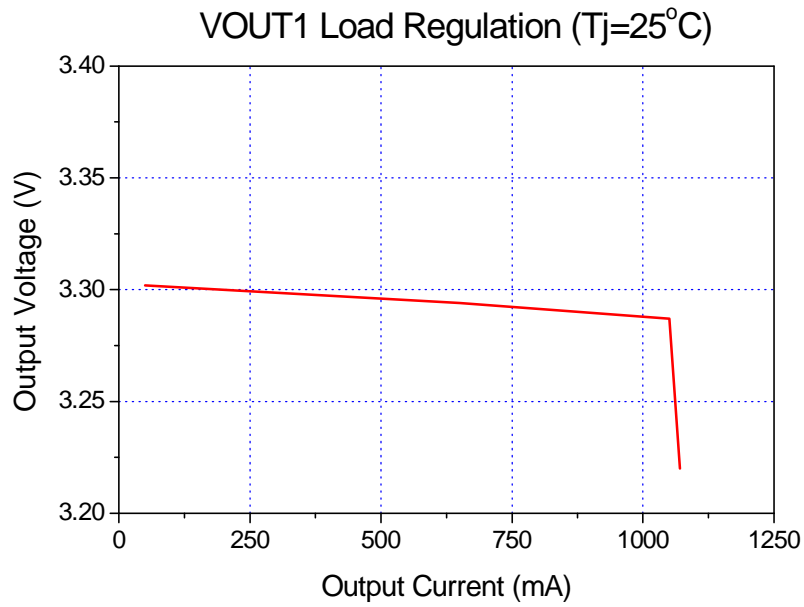

ELECTRICAL CHARACTERISTICS CURVES (Continued)

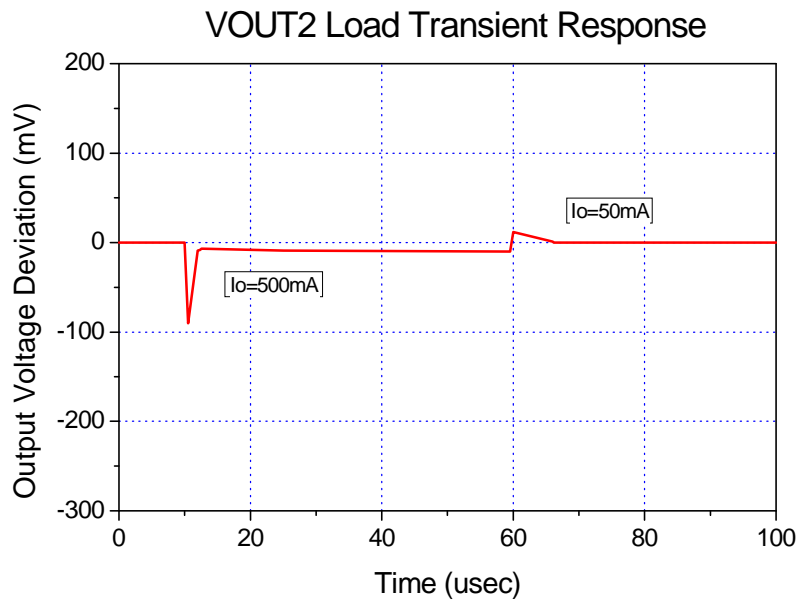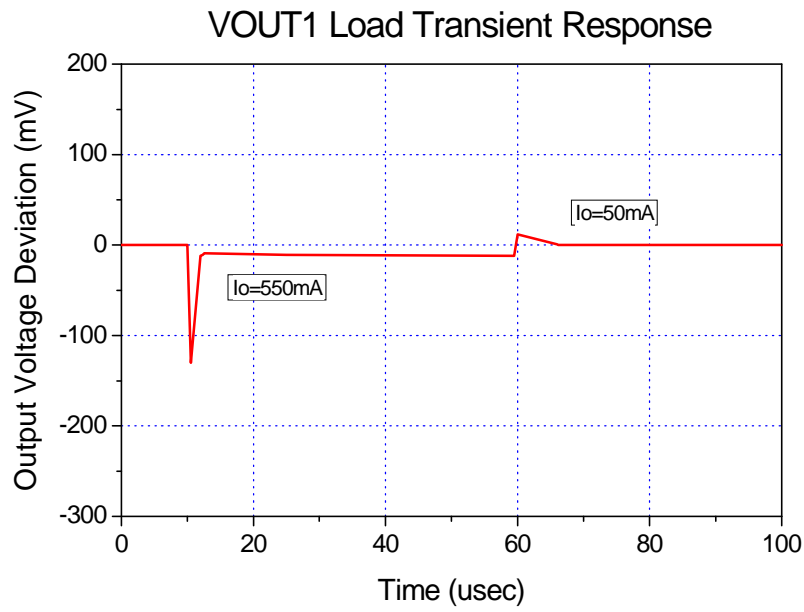

PACKAGE DIMENSION

14SOPH-8L

