

3216 Size


**Chip Multilayer Diplexer
for CELL/PCS**

FSLF-080HL

All the technical data and information contained
herein are subject to change without notice.








Shape & Size

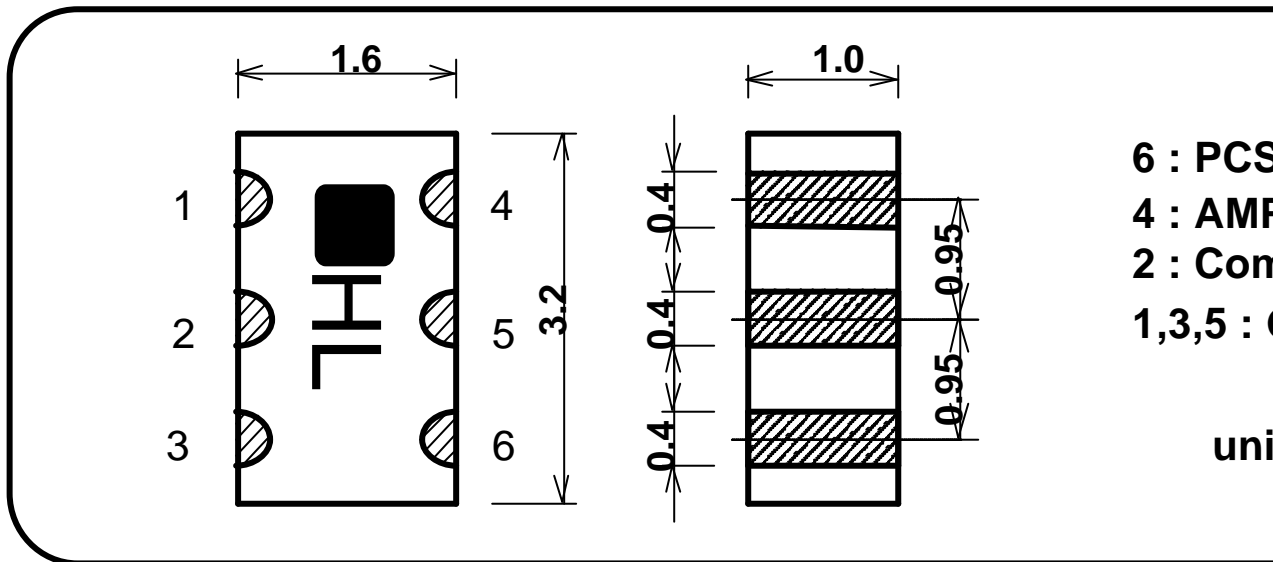

Specifications


Frequency Range	f1:824-894MHz	Attenuation CELL <=>Co
	f2:1850-1990MHz	
Insertion Loss in f1 CELL <=>Common	0.45dB Max.(at +25deg) 0.5dB Max.(at -35to+85deg)	Attenuation PCS <=>Co
Insertion Loss in f2 PCS <=>Common	0.5 dB Max.(at +25deg) 0.55dB Max.(at -35to+85deg)	Power Cap Temperatur
Return Loss (all port)	14 dB Min.	

FSLF-080HL SAMPLE DATA

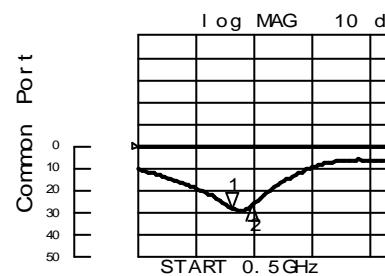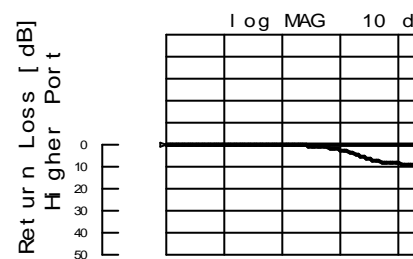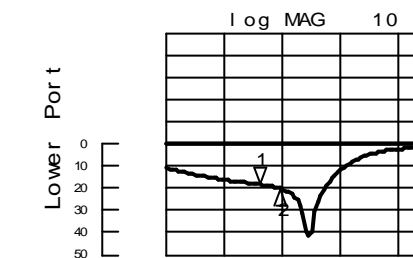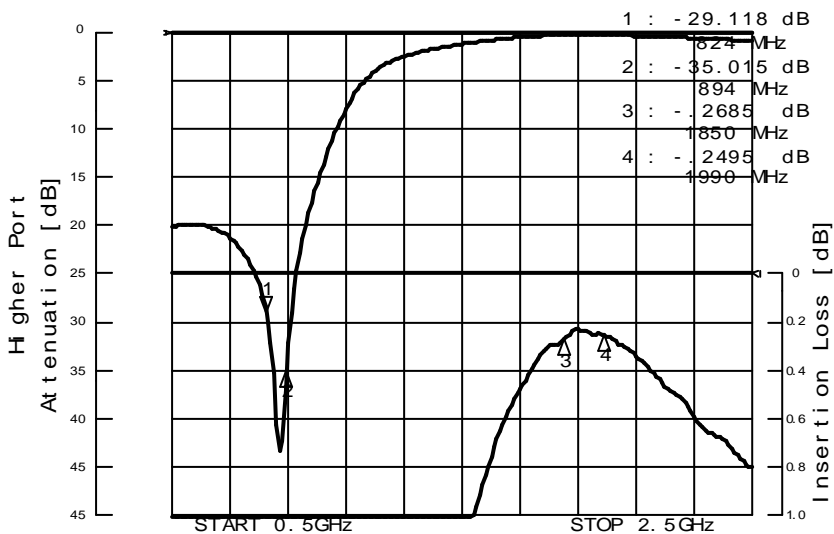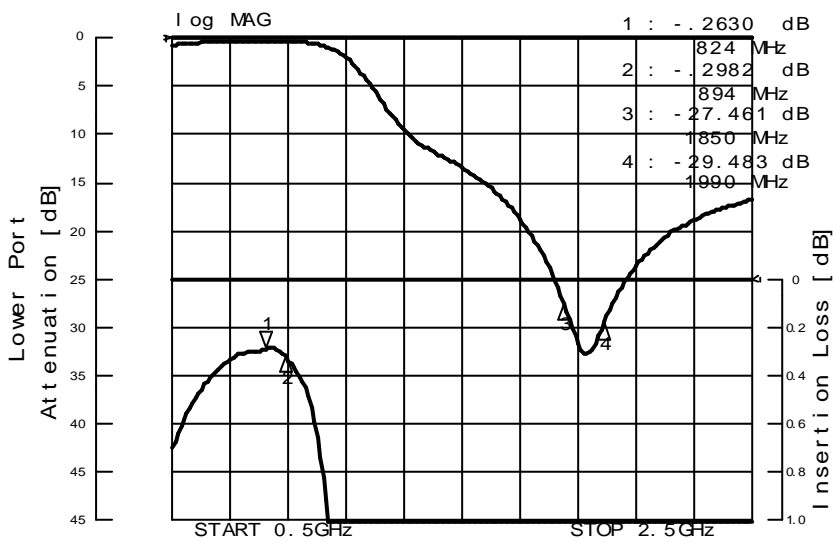

All the technical data and information contained herein are subject to change without notice.

Foot Pattern

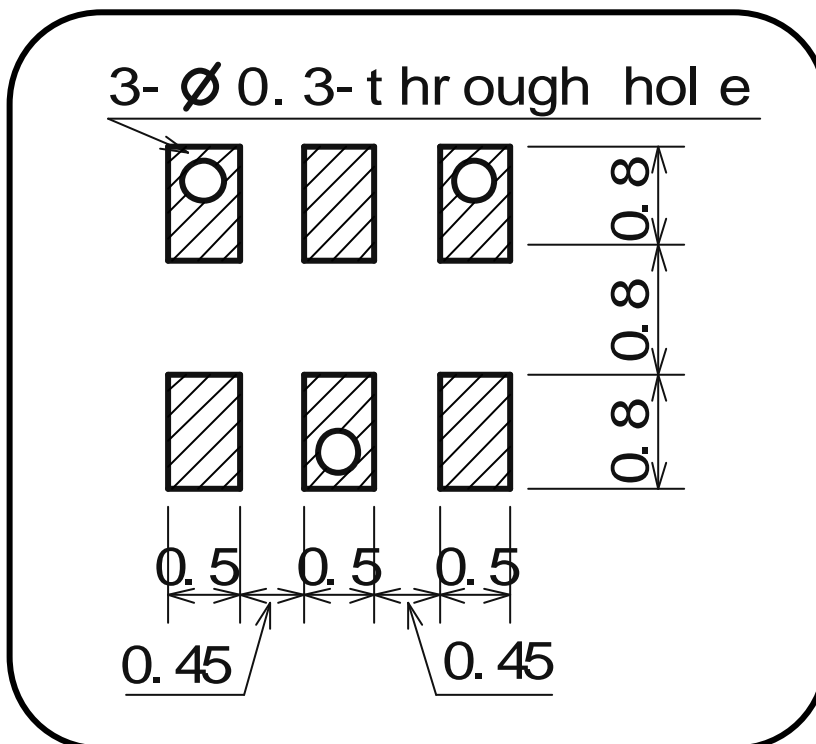

Foot Pattern

