

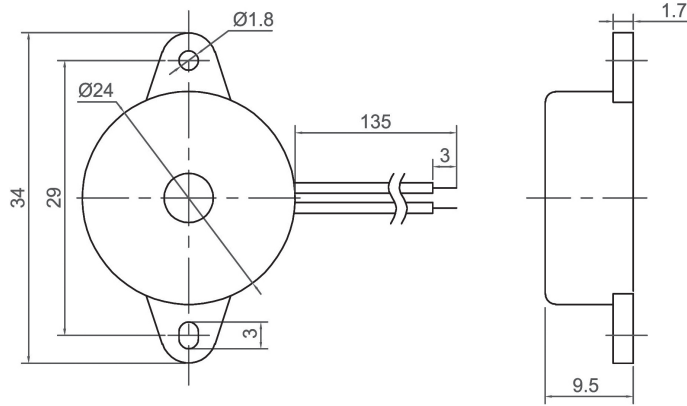


Piezo Buzzer (DC)

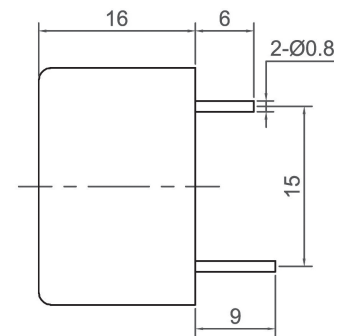


Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB2409GC34TW	3 ~ 20	9	10	82 at 30cm	3400 ± 500	Continuous	-20 ~ +65	PBT	4

CANOPUS

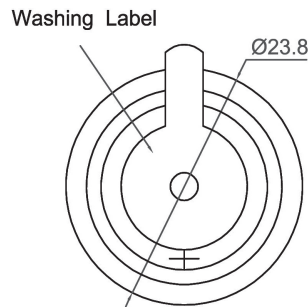

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB2416HC29NP	3 ~ 20	12	8	85 at 30cm	2900 ± 500	Continuous	-20 ~ +85	Noryl	6

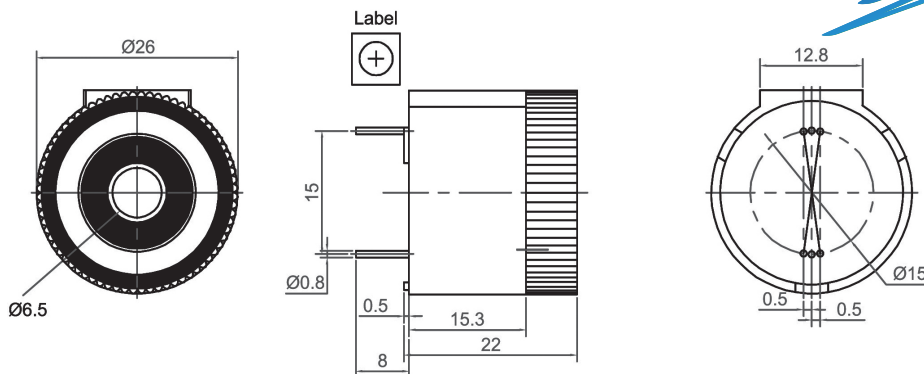

Canopus Part no.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max Rated Current (mA)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Tone Nature	Operating Temperature (°C)	Housing	Weight (g)
CPB2622GC28BP	5 ~ 18	9 / 12	50	98 at 60cm	2800 ± 500	Continuous	-20 ~ +60	ABS	15

Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812 Fax: (852) 2652 2216