


肖特基二极管  
反向电压 40---200V  
正向电流 10 A

Schottky Barrier Rectifier  
Reverse Voltage 40 to 200 V  
Forward Current 10 A

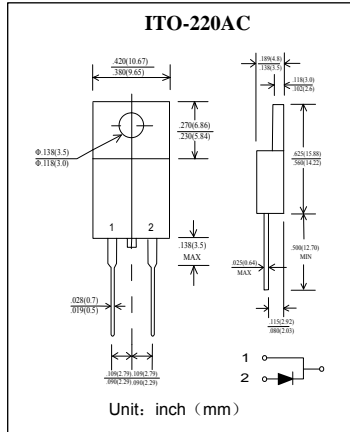

### 特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 低功耗高效率。Low Power Loss, High Efficiency
- 引线 and 管体皆符合RoHS标准。  
Lead and body according with RoHS standard

### 机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded Plastic
- 极性: 标记模压或印于本体 Polarity: Symbols molded or marked on body
- 安装位置: 任意 Mounting Position: Any
- 安装扭矩: 推荐值 0.3牛\*米 Mounting torque: Recommend 0.3 N\*m

极限值和温度特性 TA = 25℃ 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25℃ ambient temperature unless otherwise specified.

	符号 Symbols	MBRF 1040	MBRF 1045	MBRF 1050	MBRF 1060	MBRF 10100	MBRF 10150	MBRF 10200	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	40	45	50	60	100	150	200	V
最大均方根电压 Maximum RMS voltage	$V_{RMS}$	28	31.5	35	42	70	105	140	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	40	45	50	60	100	150	200	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	10.0							A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	$I_{FSM}$	150							A
典型热阻 Typical thermal resistance	$R_{\theta JC}$	3.0							℃W
工作结温和存储温度 Operating junction and storage temperature range	$T_j, T_{STG}$	-55--- +150							℃

电特性 TA = 25℃ 除非另有规定。

Electrical Characteristics Ratings at 25℃ ambient temperature unless otherwise specified.

	符号 Symbols	MBRF 1040	MBRF 1045	MBRF 1050	MBRF 1060	MBRF 10100	MBRF 10150	MBRF 10200	单位 Unit
最大正向电压 $I_F = 10A$ Maximum forward voltage	$V_F$	0.70		0.80		0.85	0.95	0.99	V
最大反向电流 Maximum reverse current	$I_R$	0.1 15				0.1 6			mA
典型结电容 $V_R = 4.0V, f = 1MHz$ Type junction capacitance	$C_j$	500							pF

特性曲线 Characteristic Curves

