


molex® 3.96mm (.156") Pitch
KK®
Crimp Terminal Housing

5265-N



FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 2 to 11 circuits
- With locking ramp
- Second circuit blank for polarization

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5275-NA, 5276-NA, 5277-NA and 5278-NA headers
 Use With: 2478, 5167, 2578 and 5168
 Designed In: Millimeters



Electrical

Voltage: 250V
 Current: 7.0A
 Contact Resistance: 10mΩ max.
 Dielectric Withstanding Voltage: 1500V AC/1 min.
 Insulation Resistance: 1000 MΩ min.

Physical

Housing: 6/6 nylon, UL 94V-2
 Operating Temperature: -40 to +105°C

CATALOG DRAWING (FOR REFERENCE ONLY)

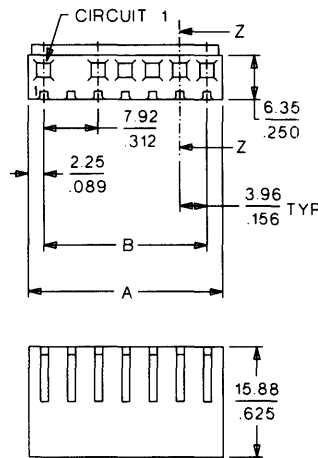

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
2	09-76-1020	12.57 (.495)	7.92 (.312)
3	09-76-1030	16.53 (.651)	11.88 (.468)
4	09-76-1040	20.49 (.807)	15.84 (.624)
5	09-76-1050	24.45 (.963)	19.80 (.780)
6	09-76-1060	28.41 (1.119)	23.76 (.935)
7	09-76-1070	32.37 (1.274)	27.72 (1.091)
8	09-76-1080	36.33 (1.430)	31.68 (1.247)
9	09-76-1090	40.29 (1.586)	35.64 (1.403)
10	09-76-1100	44.25 (1.742)	39.60 (1.559)
11	09-76-1110	48.21 (1.898)	43.56 (1.715)

D

3.00 to 7.92mm (.118 to .312") Pitch