
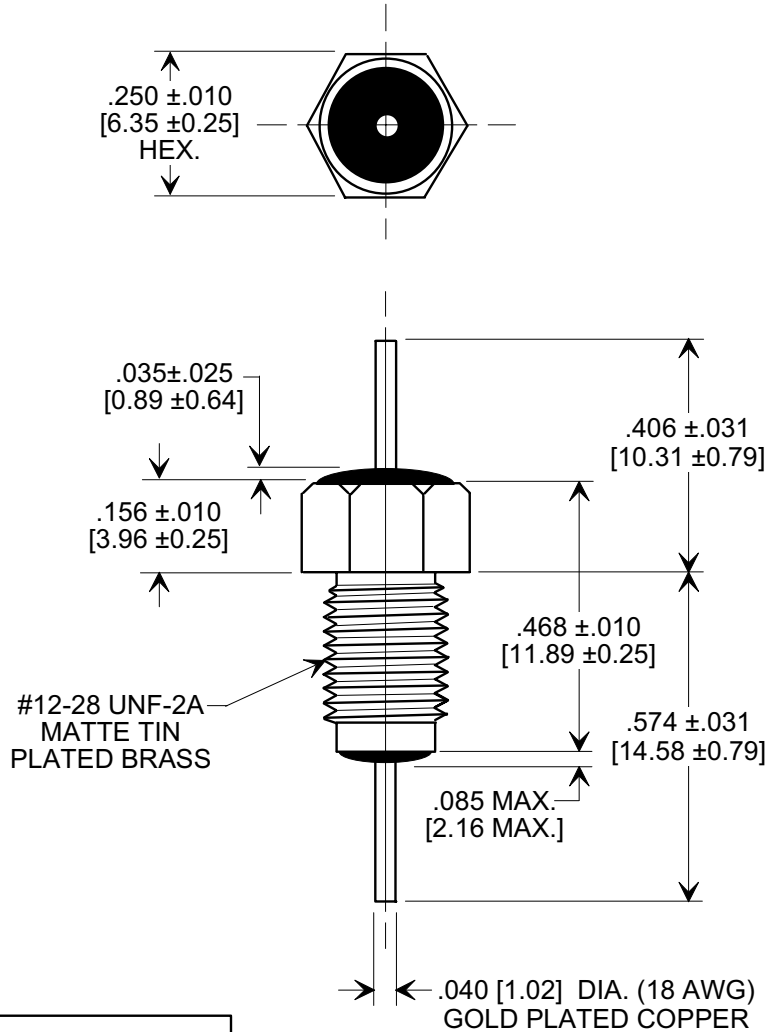



**MARKETING SALES DRAWING**

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

Electrical Testing  
 per Tusonix standard  
 test plans and Mil-Std-202  
 Test Methods.



**SPECIFICATIONS**

TUSONIX STYLE.	2499-096
Capacitance Value:	5,000 pF
Capacitance Tolerance:	+80%, -20%
Temp. Characteristics:	X5W
Rating:	500 WVDC
Current (A):	20
IR Min @ 100 vdc	10 GΩ
DWV	1500 VDC
Operating Range:	-55° TO + 85°C

X-2015 Rev-0

<b>REVISION RECORD</b>	Original Release	0
	C.O. 19991111-2-02	
	SPEC. TABLE REVISED L.E. 01-27-04	1
	2040126-2-08	

--TOLERANCES-- Unless Otherwise Specified		Title	
DECIMAL ± .015 [0.38]		<b>BUSHING TYPE FEED-THRU CAPACITOR</b>	
ANGLES ±			
<b>TUSONIX</b> TUCSON, ARIZONA		Drawn	S.M. 11-11-99
		Approved	J.Mc. 11-11-99
<b>A</b>		Scale 3X	
		<b>2499-096-X5WO-502Z</b>	