
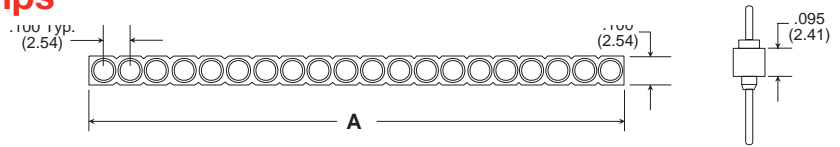


Single In-Line Solid Adapter Strips

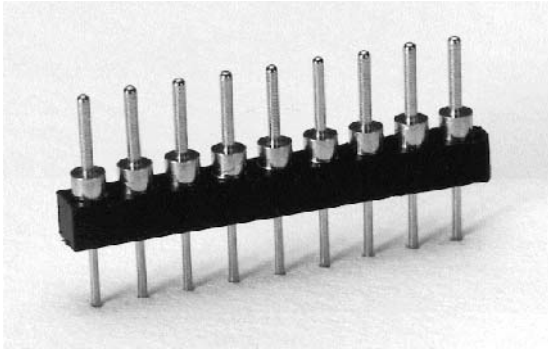

A Dimension = number of pins X .100 (2.54)

Features:

- Molded in lengths 3 - 20, 30 & 32. For other lengths consult factory.
- .100" (2.54mm) pin to pin spacing.
- Board to board applications.
- Highly reliable method of interconnecting.

Terminals:

Terminal: Brass - Copper Alloy (C36000), ASTM-B-16

Plating:


Terminal: Gold over Nickel or Tin-Lead over Nickel

Body Material:


NA - Glass Filled Thermoplastic Polyester (P.B.T.) U.L. Rated 94V-O, -60°C to 140°C (-76°F to 284°F)


HNA - High Temp. Glass Filled Thermoplastic, U.L. Rated 94V-O, -60°C to 260°C (-76°F to 500°F)

Terminal Information

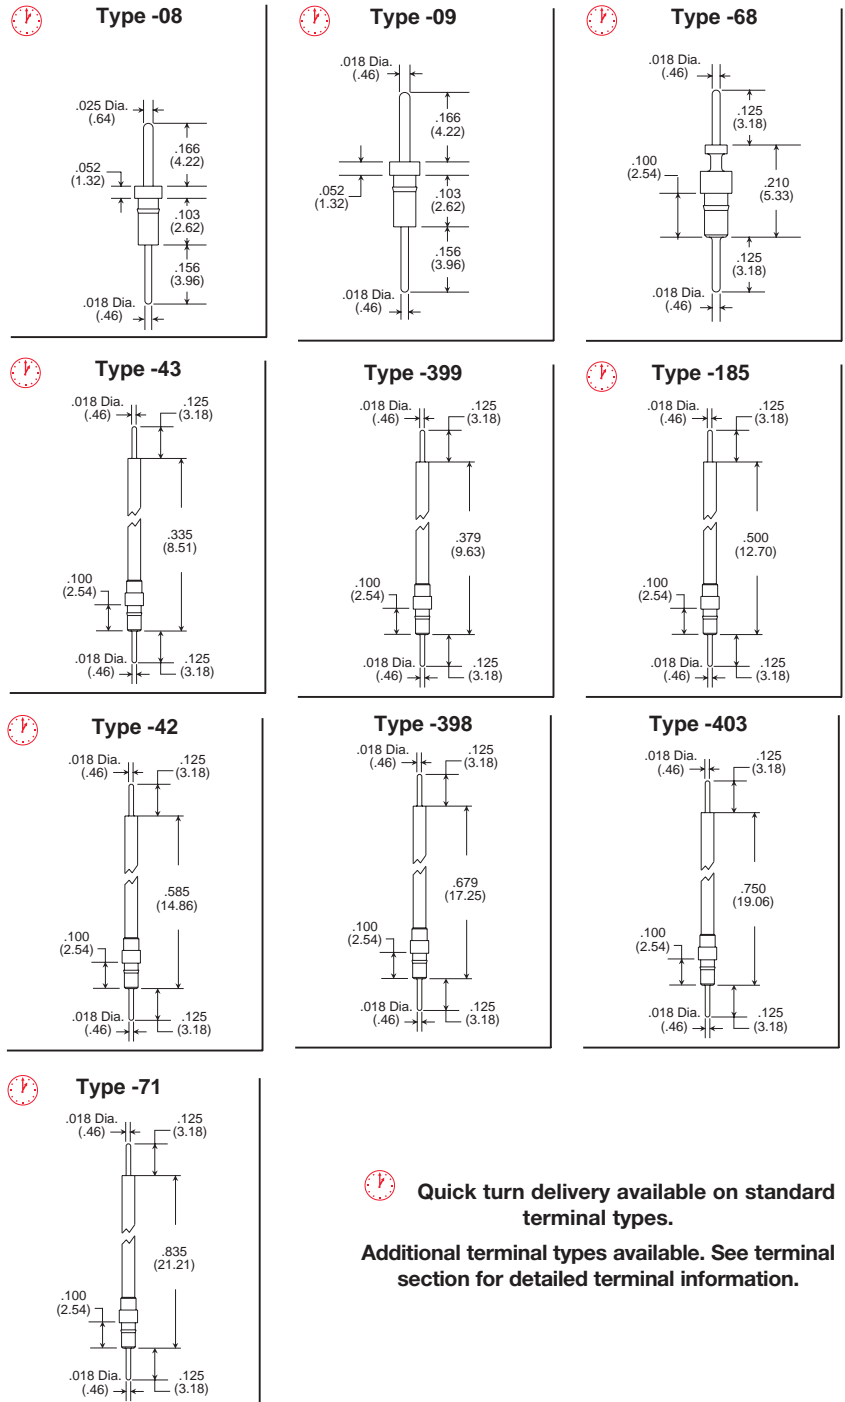

How To Order

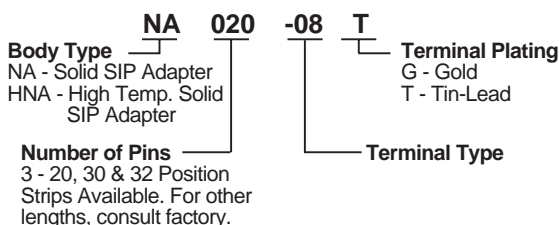

 Quick turn delivery available on standard terminal types.

Additional terminal types available. See terminal section for detailed terminal information.