

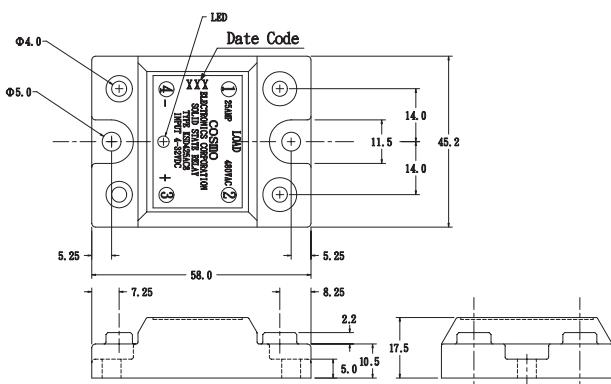
## Features

1. Molded epoxy body.
2. Zero crossing circuit.
3. High input/output insulation.
4. Small size and light weight.
5. Fast reactive speed.
6. Good heat sinking.
7. Normally open.


## Applications

1. Household Appliances.
2. Temperature Control System.
3. Industrial Automatic Control.
4. Lighting System.
5. Office Appliances.
6. Factory Appliances.

## Outside Dimension : Unit (mm)



## Schematic : Top View

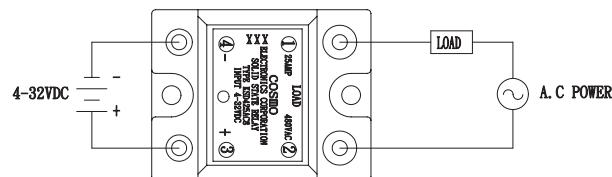

## Absolute Maximum Ratings

(Ta=25°C)








Parameter		Symbol	Rating	Unit
Input	Input Signal Voltage	V <sub>IN</sub>	4-32	VDC
	Drop-out Voltage	V <sub>DO</sub>	1	VDC
Output	RMS on-state current	I <sub>T</sub>	25	Arms
	Peak one cycle surge current (6.3 ms)	I <sub>surge</sub>	250	A
	Repetitive peak-off state Voltage	V <sub>DREM</sub>	800	V
	Operating frequency	f	47-70	Hz
	Critical rate of rise of on-state current	dI/dt	50	A/μS
	Load supply voltage	V <sub>OUT</sub>	480	Vrms AC
Isolation Voltage input to output		V <sub>ISO</sub>	4000	Vrms
Operating Temperature		T <sub>OPR</sub>	-30~100	°C
Storage Temperature		T <sub>STG</sub>	-30~125	°C

## Electrical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN	TYP	MAX	Unit
Input	Pick-up Voltage	V <sub>PU</sub>	I <sub>T</sub> =1Arms			4	VDC
	Input current	I <sub>IN</sub>	V <sub>IN</sub> =4-32V	5		12	mA
Output	On-state Voltage	V <sub>T</sub>	I <sub>T</sub> =1Arms			1.5	Vrms
	Operating Current	I <sub>OP</sub>	V <sub>OUT</sub> =480Vrms	50			mArms
	Leakage Current	I <sub>LEAK</sub>	V <sub>OUT</sub> =480Vrms			14	mArms
	Critical rate of rise of off-state Voltage	dV/dt	See Note 1	50	200		V/μS
	Zero-cross Voltage				Yes		
	Load Voltage Rating	V <sub>OUT</sub>	I <sub>T</sub> =50mArms MIN	75		480	VAC
Minimum trigger current		I <sub>FT</sub>	V <sub>DREM</sub> =1200V			25	mA
Isolation resistance input to output		R <sub>ISO</sub>	DC500V	10 <sup>10</sup>			Ω
Turn-on time		T <sub>ON</sub>	60Hz AC			8.3	μS
Turn-off time		T <sub>OFF</sub>	60Hz AC			8.3	μS
Thermal resistance (between junction and case)		R <sub>TH</sub> (j-C) I			1.3		°C/W

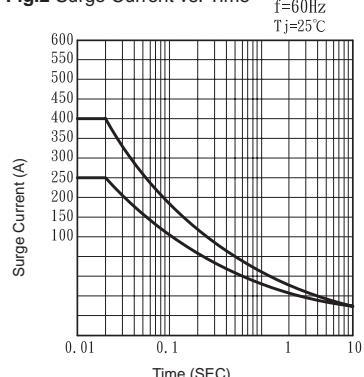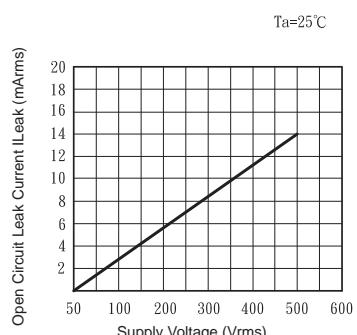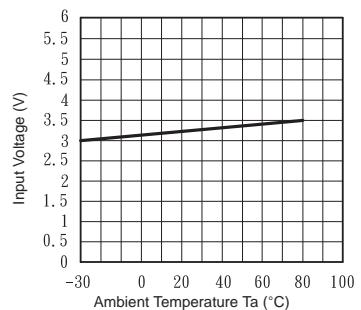Note1 : Output (dv/dt) protection is provided in all models, and they are designed to switch resistive or inductive loads to 0.2 power factor. The dv/dt rating is based on source impedance of 50 ohms.

**Data Curve****Fig.1** RMS On-state Current vs. Ambient Temperature**Fig.2** Surge Current vs. Time**Fig.3** Open Circuit Leak Current vs. Supply Voltage**Fig.4** RMS On-state Current vs. Case Temperature**Fig.5** Input Voltage vs. Ambient Temperature**Fig.6** Input Current vs. Input voltage**Fig.7** Action waveform**Fig.8** WIRING DIAGRAM