


REV. CT

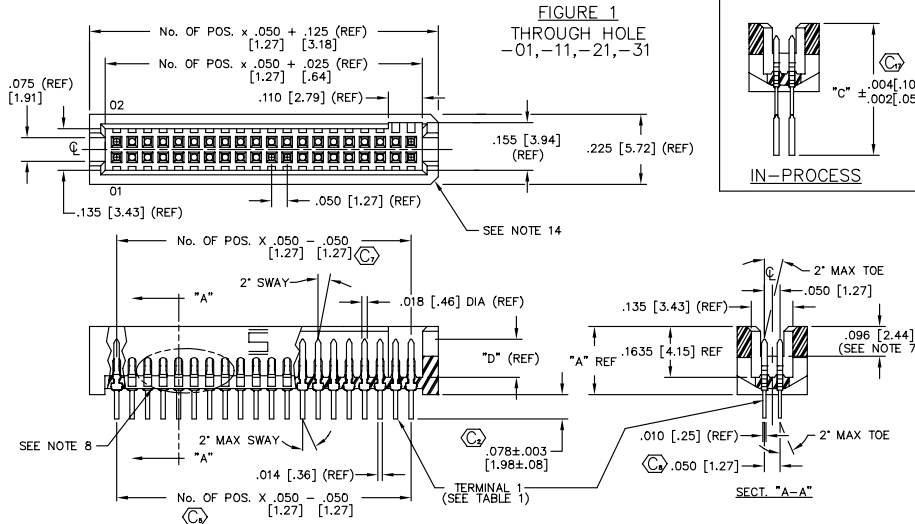

DO NOT SCALE PRINT

FIGURE 1
THROUGH HOLE
-01, -11, -21, -31

FIG. 3
-K POLYAMIDE FILM PAD

FIG. 2
-02, -12, -22, -32: SURFACE MOUNT
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

FIG. 4
-TR TAPE AND REEL

TABLE 1

LEAD STYLE	BODY	"A"	TERMINAL 1	"B"	TERMINAL 2	"C"	"D"	"E"
-01, -02	TFM-XX-D-01-X	.2200 [5.588]	T-1R16-01-XXX-2 T-1R16-01-XXX-2	.015 [3.8]	-----	.427±.004 [10.85±.10]	.133 [3.38]	.230 [5.84]
-11, -12	TFM-XX-D-02-X	.2900 [7.366]	T-1R20-03-XXX	.030 [7.6]	-----	.644±.004 [16.36±.10]	.130 [3.30]	.300 [7.62]
-21, -22	TFM-XX-D-03-X	.3600 [9.144]	T-1R20-04-XXX	.100 [2.54]	-----	.644±.004 [16.36±.10]	.130 [3.30]	.370 [2.00]
-31, -32	TFM-XX-D-04-X	.4350 [11.049]	T-1R20-02-XXX	.175 [4.45]	-----	.644±.004 [16.36±.10]	.130 [3.30]	.445 [11.30]
-01-RA	TFM-XX-D-01-X	.2200 [5.588]	T-1R16-02-XXX	.035 [7.6]	T-1R16-03-XXX	-----	.133 [3.38]	.230 [5.84]

NOTES:
 1. MINIMUM PUSHOUT FORCE TO BE 12 OUNCES.
 2. COPLANARITY: .004 [0.10]=POS 02 THRU 26
 .006 [0.15]=POS 27 THRU 50
 3. MANUFACTURING IN PROCESS DIMENSION DESIGNED TO ACHIEVE FINISHED ASSEMBLY.
 4. Ⓢ REPRESENTS CRITICAL DIMENSION.
 5. [] DIMENSIONS ARE IN MILLIMETERS.
 6. MEASURED FROM BEND.
 7. DIMENSION CHANGED PER REVISION AD. CONTACT ENGINEERING FOR INFORMATION.
 8. SIDES OF PLASTIC BODIES ON ALL LEADSTYLES EXCEPT THE -01 & -02 WILL BE SOLID AND NOT RIBBED.
 9. MEASURE FROM TIPS OF PIN.
 10. NOTE DELETED.
 11. .003 MAXIMUM TERMINAL BURR
 12. .005 MAXIMUM HEIGHT VARIATION BETWEEN ANY TWO PINS.
 13. MINIMUM LOCKING CLIP RETENTION TO BE 8 OZS.
 14. THIS FEATURE ONLY PRESENT ON -01 & -02 LEAD STYLES.

PLATING SPECIFICATION
 -S: SELECTIVE
 -L: LIGHT SELECTIVE
 -F: FLASHED GOLD
 -P: GOLD FLASHED PALLADIUM NICKEL
 -G: GOLD
 -H: HEAVY GOLD
 -SM: SELECTIVE HEAVY GOLD, MATTE TIN TAIL
 -LM: SELECTIVE LIGHT GOLD, MATTE TIN TAIL
 -FM: FLASH SELECTIVE GOLD, MATTE TIN TAIL
 -STL: SELECTIVE TIN LEAD

TERMINAL SPECIFICATION
 -D: DOUBLE ROW

OPTIONS
 -A: ALIGNMENT PIN (USE TFM-XX-D-XX-A, SEE TABLE 1) (SEE FIG. 8, SHEET 2) (NOT AVAILABLE FOR -RA)
 -LC: LOCKING CLIP (USE LC-05-TM) (NOT AVAILABLE WITH -RA OPTION) (SEE FIG. 10, SHEET 2) (SEE NOTE 13)
 -P: PICK AND PLACE PAD (USE PPP-04) (AVAILABLE IN ALL POSITIONS) (NOT AVAILABLE WITH -RA OPTION, SEE FIG. 7, SHEET 2)
 -RA: RIGHT ANGLE (AVAILABLE ONLY IN LEAD STYLE: -01, SEE FIG. 5, SHEET 2)
 -TR: TAPE AND REEL (SEE FIG. 4)
 -SA: STAKED ALIGNMENT PIN (SEE FIG. 9, SHEET 2) (NOT AVAILABLE FOR -RA)
 -K: POLYAMIDE FILM (SEE FIG. 3)
 * -WT: WELD TABS (USE WT-25-04-T) (AVAILABLE ON -01 & -02 LEAD STYLES ONLY) (SEE FIG. 6, SHEET 2) (AVAILABLE ON -05, -07, -10, -15, -20, -25, & -30 POS ONLY) (AVAILABLE WITH -L & -S PLATING ONLY) (NOT AVAILABLE WITH -A, -LC, -RA, OR -SA OPTIONS)

BODY SPECIFICATION
 -D: DOUBLE ROW

* = NOT RELEASED FOR PRODUCTION

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC. THE DESIGN SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF SAMTEC INC.

EXISPROD/ASSEMBLY/050
TFM-ASM

samtec

520 PARK EAST BLVD., NEW ALBANY, INDIANA 47150
PHONE (812) 344-4733, P.O. BOX 1147
CODE 55322

MADE BY: KOLB 12-B-89
CHECKED BY: MCCARTIN

APPROVAL: [Signature]
D.E.M.

TFM-1XX-XX-XXX-X-XX
SHEET 1 OF 3

REV. CT


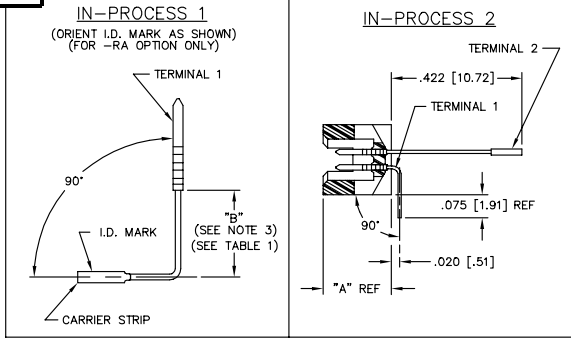


FIG. 5
-RA OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

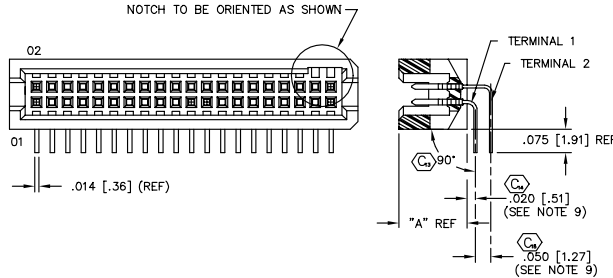

UNLESS OTHERWISE NOTED TOLERANCES ARE:
ONE PLACE DECIMALS ±.1 [2.54] THREE PLACE DECIMALS ±.005 [0.13] ANGLES ±2°
TWO PLACE DECIMALS ±.01 [0.25] FOUR PLACE DECIMALS ±.0020 [0.05]

TITLE: .050 x .050 TERMINAL STRIP

DWG NO: TFM-1XX-XX-XXX-X-XX SHEET 2 OF 3

FIG. 8
-A OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

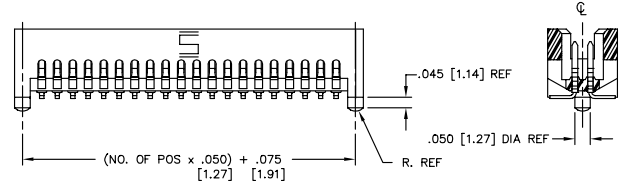


FIG. 6
*-WT OPTION * = NOT RELEASED FOR PRODUCTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

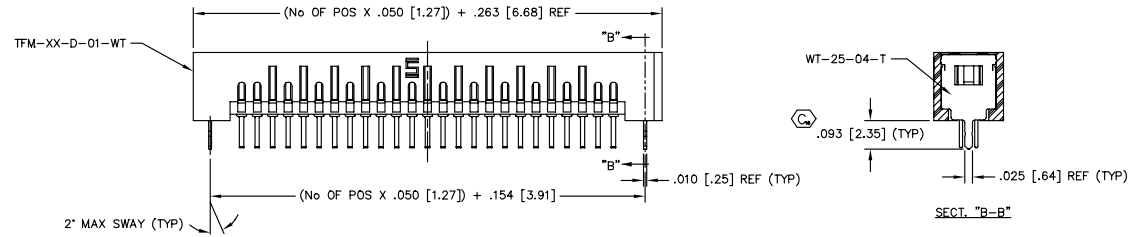


FIG. 9
-SA OPTION: STAKED AL PIN
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1

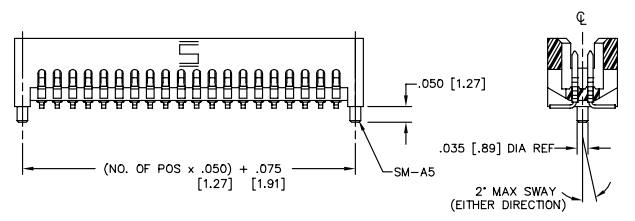


FIG. 7
-P OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1
(PAD TO BE POSITIONED ON C.L. AS SHOWN)


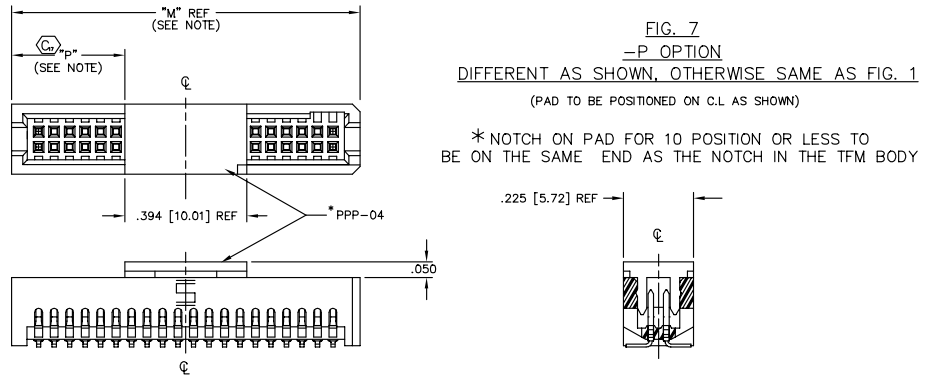


FIG. 10
-LC OPTION
DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG. 1
(STYLE -02 SHOWN)

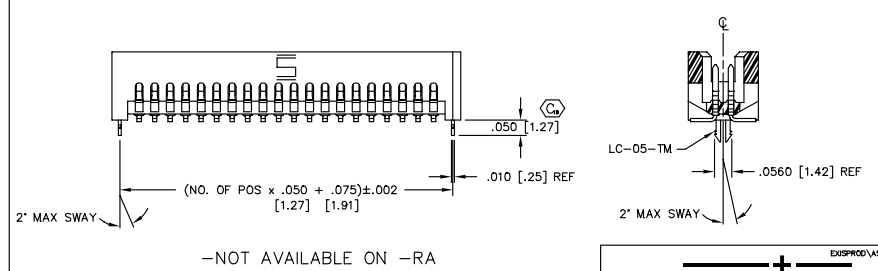

PROPRIETARY NOTE
THIS DRAWING IS THE PROPERTY OF SAMTEC CORPORATION. IT IS TO BE USED FOR THE MANUFACTURE OF SAMTEC PRODUCTS ONLY. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF SAMTEC CORPORATION.

NOTE: "M" = (No OF POS x .050 [1.27]) + .125 [3.18]
"P" = {"M" - .394 [10.01]} / 2 ±.020 [.51]

REV. CT

PARTS TO BE PACKAGED IN TUBES AS SHOWN

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED		TOLERANCES ARE:	TITLE: .050 x .050	DWG NO: TFM-1XX-XX-XXX-X-XX
ONE PLACE DECIMALS ±.1 [2.54]	THREE PLACE DECIMALS ±.005 [.13]	ANGLES ±.2°	TERMINAL STRIP	SHEET 3 OF 3
TWO PLACE DECIMALS ±.01 [.25]	FOUR PLACE DECIMALS ±.0020 [.05]			

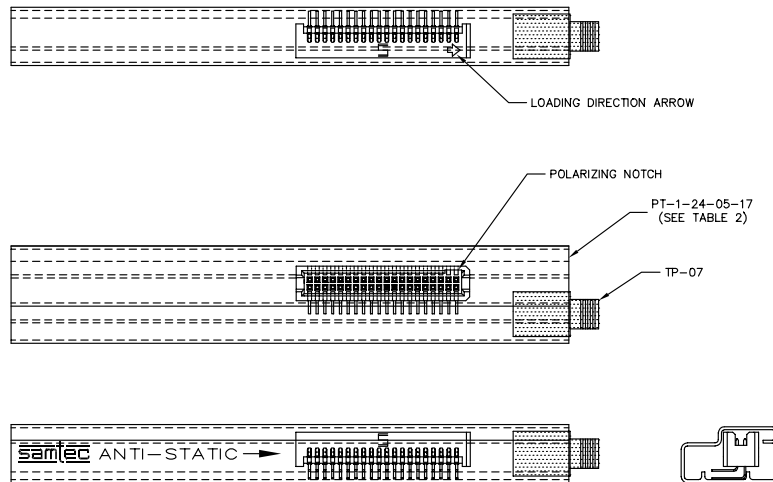
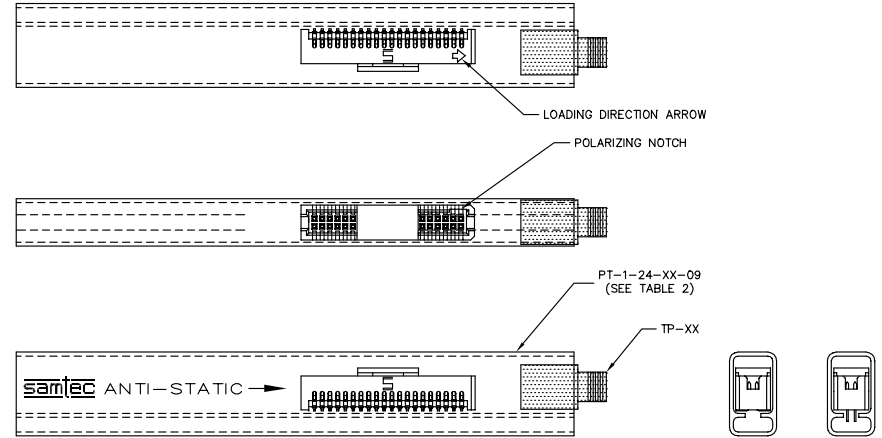
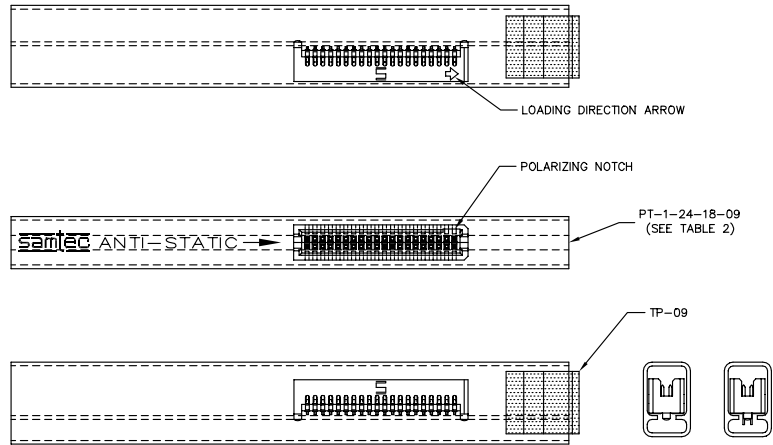


TABLE 2

LEAD STYLE	PACKAGING TUBE	PLUG
-RA (ALL LEAD STYLES)	PT-1-24-05-17	TP-07
-02, -02-A, -02-A-K, -02-LC	PT-1-24-01-09	TP-24
-12 (ALL OPTIONS), -22-K, -22, -22-A, -22-A-K, -22-LC, -22-LC-K	PT-1-24-04-09	TP-07
-02-A-P, -02-K, -02-LC-K, -02-LC-P, -02-P, -02-WT -01 (ALL OPTIONS), -11, -11-A, -11-LC, -11-K, -11-LC-K, -11-A-K	PT-1-24-18-09	TP-09
-31-A-K, -31-A-P, -31-LC-P, -31-P, -32, -32-K -32-A, -32-A-K, -32-A-P, -32-LC-K, -32-LC-P, -32-P	PT-1-24-02-09	TP-07
-31, -21-P, -22-P, -31-LC, -21-A-P, -21-LC-P, -22-LC-P, -31-A, -32-LC, -22-A-P, -31-LC-K, -31-K	PT-1-24-05-09	TP-07
-11-P, -11-LC-P, -11-A-P, -21, -21-K, -21-A, -21-LC, -21-A-K, -21-LC-K	PT-1-24-20-09	TP-07

NOTE:
PARTS TO BE PACKAGED WITH THE LOADING DIRECTION ARROW POINTED IN SAME DIRECTION AS THE ARROW ON TUBE.

PROPRIETARY NOTE
THIS DRAWING IS THE PROPERTY OF SAMTEC CORPORATION. IT IS TO BE USED FOR THE MANUFACTURE OF SAMTEC PRODUCTS ONLY. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF SAMTEC CORPORATION.

EXSPROD/ASSEMBLY/050
TFM-ASMS

samtec

520 PARK EAST BLVD., NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: KOLB 10-25-91

TFM-1XX-XX-XXX-X-XX
SHEET 3 OF 3