

SMD Power Inductor CDH25D11D



Under Development



Halogen Free



Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 2.6 × 2.1 × 1.2 mm Max.
- Product weight: 20 mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

Environmental Data

- Operating temperature range: -40°C~+105°C (including coil's self temperature rise)
- Storage temperature range: -40°C~+105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging.


Applications

- Ideally used in HDD, cell phone, PDA, DVC and DSC.

Dimension - [mm]

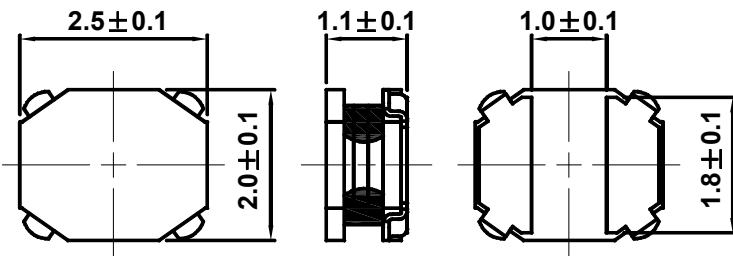

Land pattern and Schematics - [mm]

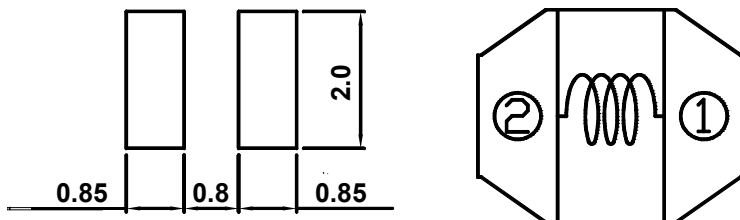

Electrical Characteristics

PART NAME	STAMP	INDUCTANCE (uH) [WITHIN] ※1	D.C.R. (mΩ) [WITHIN] (at 20°C)	SATURATION CURRENT (A) (at 20°C) ※2	TEMPERATURE RISE CURRENT (A) ※3
CDH25D11DHF-1R0NC-H	A	1.0±30%	79±25%	2.16	1.52
CDH25D11DHF-1R5NC-H	B	1.5±30%	118±25%	1.89	1.25
CDH25D11DHF-2R2MC-H	C	2.2±20%	167±25%	1.50	1.02
CDH25D11DHF-3R3MC-H	D	3.3±20%	215±25%	1.30	0.96
CDH25D11DHF-4R7MC-H	E	4.7±20%	318±20%	1.11	0.76
CDH25D11DHF-6R8MC-H	F	6.8±20%	495±20%	0.84	0.58
CDH25D11DHF-100MC-H	G	10±20%	755±20%	0.71	0.44

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.

※3. Temperature rise current: The value of D.C. current when the temperature rise is Δt=40°C (Ta=20°C).








SMD Power Inductor CDH25D11D



Under Development

Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

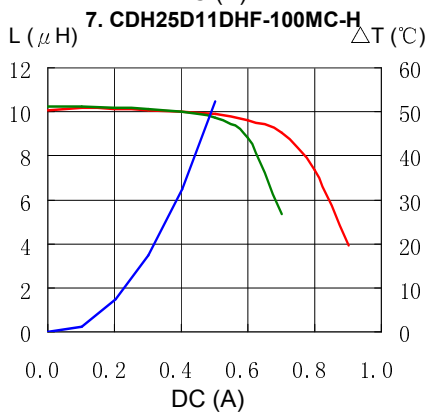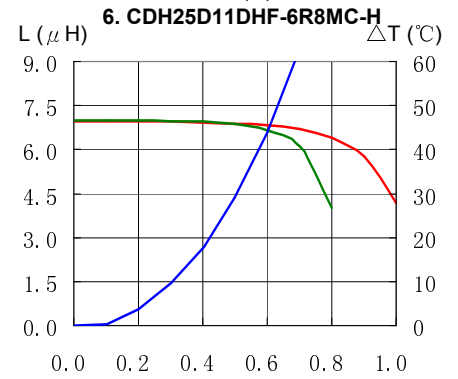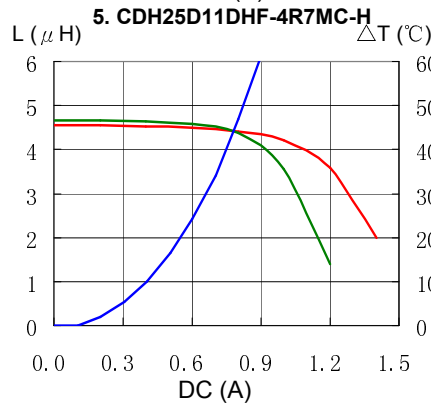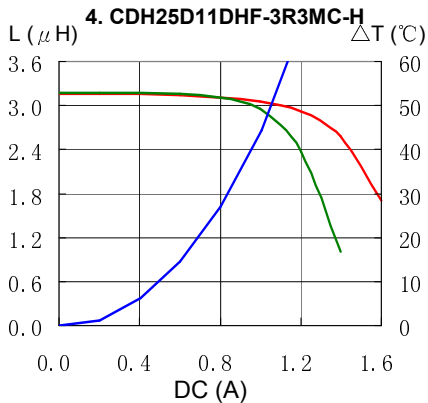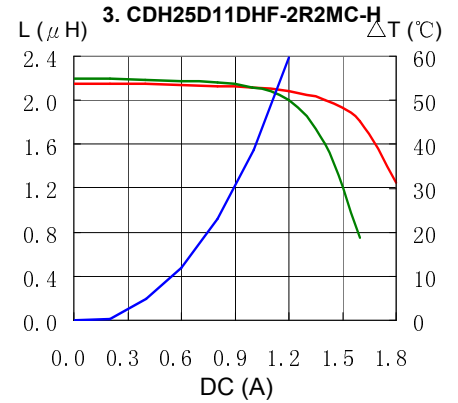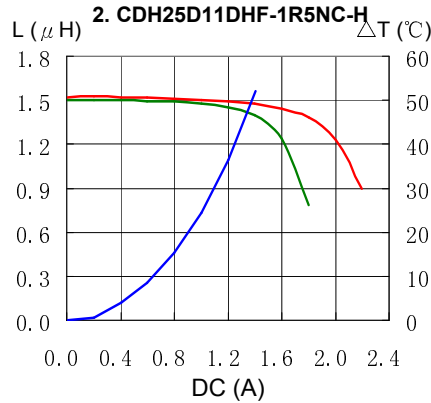
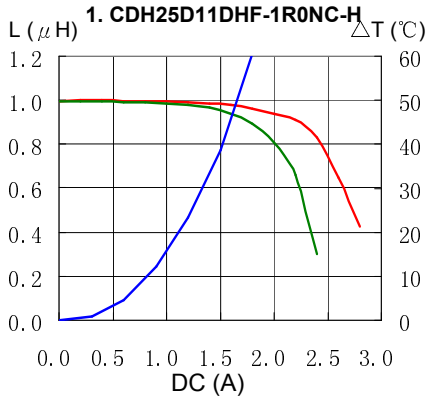


SMD Power Inductor CDH25D11D



Under Development

Solder Reflow Condition

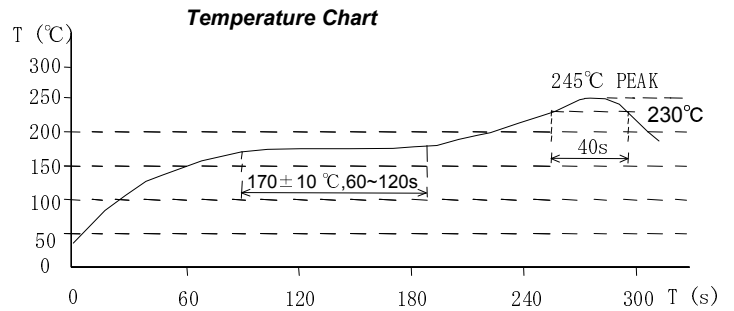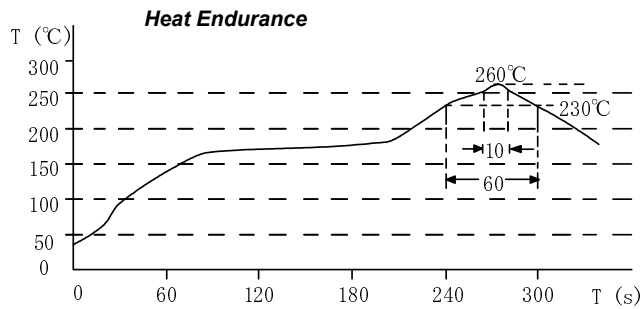

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6688
FAX.+852-2565-9600
sales@hk.sumida.com

Tokyo

Tel.+81-3-5202-7112
FAX.+81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-021-5836-3299
FAX.+86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-3219660
FAX.+1-408-321-9308
sales@us.sumida.com