


Wirewound Resistors, Commercial Power, Axial Lead

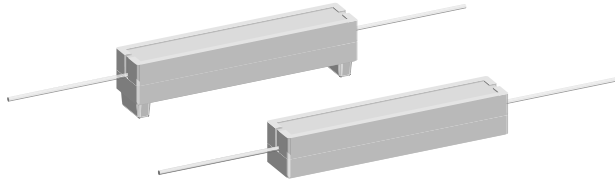

FEATURES


- High power to size ratio
- Ceramic cases are available with circuit board stand-offs (designated with a -3 model ending)
- Superior surge capability
- Complete welded construction
- Available in non-inductive styles with Aryton-Perry winding (CPWN in lieu of CPW, maximum resistance is one-half CPW range)
- Special inorganic potting compound and ceramic case provide high thermal conductivity in a fireproof package

STANDARD ELECTRICAL SPECIFICATIONS			
MODEL	POWER RATING $P_{40^{\circ}\text{C}}$ W	RESISTANCE RANGE Ω $\pm 1\%, \pm 2\%, \pm 3\%, \pm 5\%$	WEIGHT (Typical) g
CPW-2	2	0.1 - 7k	2.0
CPW-2-3	2	0.1 - 7k	2.2
CPW-3	3	0.1 - 7.5k	3.4
CPW-3-3	3	0.1 - 7.5k	3.6
CPW-5	5	0.1 - 8.5k	4.8
CPW-5-3	5	0.1 - 8.5k	5.0
CPW-7	7	0.1 - 18k	6.8
CPW-7-3	7	0.1 - 18k	7.0
CPW-10	10	0.12 - 30k	9.5
CPW-10-3	10	0.12 - 30k	9.9
CPW-15	15	0.12 - 30k	16.8
CPW-15-3	15	0.12 - 30k	17.4
CPW-20	20	0.18 - 45k	22.8
CPW-20-3	20	0.18 - 45k	23.6

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	CPW RESISTOR CHARACTERISTICS
Temperature Coefficient	ppm/ $^{\circ}\text{C}$	± 90 below 1.0Ω , ± 50 for 1.0Ω to 9.9Ω , ± 30 for 10Ω and above
Short Time Overload	-	5 x rated power for 5 seconds
Maximum Working Voltage	V	$(P \times R)^{1/2}$
Operating Temperature Range	$^{\circ}\text{C}$	- 65/+ 275
Terminal Strength	lb	10 minimum
Dielectric Withstanding Voltage	V_{AC}	1000

ORDERING INFORMATION		
CPW-10-3 MODEL	500 Ω RESISTANCE Ω	5% TOLERANCE $\pm \%$

DIMENSIONS

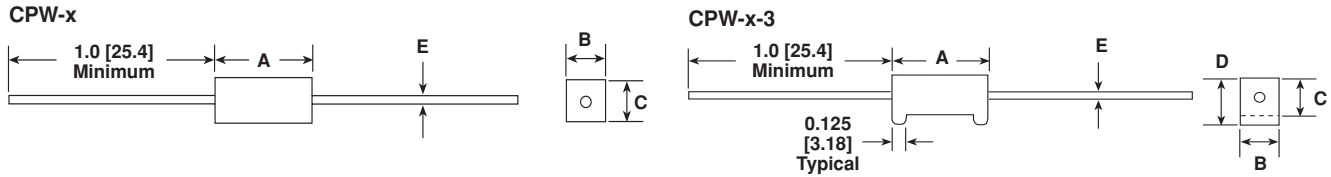

MODEL	DIMENSIONS in inches [millimeters]				
	A* ± 0.031 [0.794]	B ± 0.031 [0.794]	C ± 0.031 [0.794]	D ± 0.031 [0.794]	E ± 0.001 [0.025]
CPW-2	0.688 [17.46]	0.250 [6.35]	0.250 [6.35]	-	0.032 [0.813]
CPW-2-3	0.688 [17.46]	0.250 [6.35]	0.250 [6.35]	0.313 [7.94]	0.032 [0.813]
CPW-3	0.875 [22.22]	0.313 [7.94]	0.313 [7.94]	-	0.032 [0.813]
CPW-3-3	0.875 [22.22]	0.313 [7.94]	0.313 [7.94]	0.375 [9.52]	0.032 [0.813]
CPW-5	0.875 [22.22]	0.375 [9.52]	0.344 [8.73]	-	0.032 [0.813]
CPW-5-3	0.875 [22.22]	0.375 [9.52]	0.344 [8.73]	0.406 [10.32]	0.032 [0.813]
CPW-7	1.391 [35.32]	0.375 [9.52]	0.344 [8.73]	-	0.032 [0.813]
CPW-7-3	1.391 [35.32]	0.375 [9.52]	0.344 [8.73]	0.469 [11.91]	0.032 [0.813]
CPW-10	1.875 [47.62]	0.375 [9.52]	0.344 [8.73]	-	0.032 [0.813]
CPW-10-3	1.875 [47.62]	0.375 [9.52]	0.344 [8.73]	0.469 [11.91]	0.032 [0.813]
CPW-15	1.875 [47.62]	0.500 [12.70]	0.500 [12.70]	-	0.032 [0.813]
CPW-15-3	1.875 [47.62]	0.500 [12.70]	0.500 [12.70]	0.625 [15.87]	0.032 [0.813]
CPW-20	2.500 [63.50]	0.500 [12.70]	0.500 [12.70]	-	0.032 [0.813]
CPW-20-3	2.500 [63.50]	0.500 [12.70]	0.500 [12.70]	0.625 [15.87]	0.032 [0.813]

*Potting compound may extend outside of ceramic case up to 0.060 [1.52] maximum per side.

MATERIAL SPECIFICATIONS

Element: Copper-nickel alloy or nickel-chrome alloy, depending on resistance value


Core: Ceramic

End Caps: Stainless steel

Body: Steatite ceramic case with inorganic potting compound

Terminals: Tinned Copperweld®

Part Marking: DALE, Model, Wattage, Value, Tolerance, Date Code

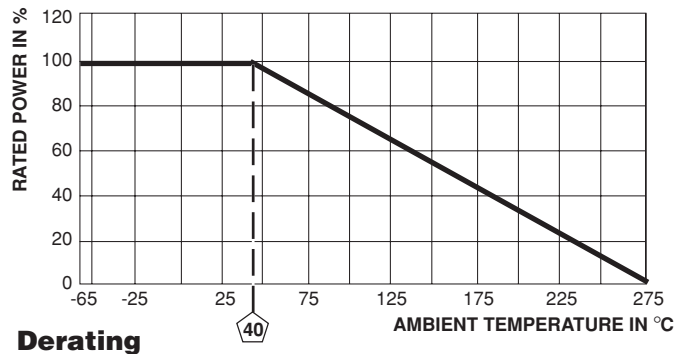

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST LIMITS (EIA RS-344)
Thermal Shock	- 55°C to + 275°C, 5 cycles, 30 minute dwell time	± (2.0% + 0.05Ω)ΔR
Short Time Overload	5 x rated power for 5 seconds	± (2.0% + 0.05Ω)ΔR
Dielectric Withstanding Voltage	1000V _{rms} for one minute	± (0.1% + 0.05Ω)ΔR
Low Temperature Operation	- 65°C, full rated working voltage for 45 minutes	± (2.0% + 0.05Ω)ΔR
Bias Humidity	75°C, 90% - 100% RH, 240 hours	± (2.0% + 0.05Ω)ΔR
Load Life	1000 hours at rated power, + 40°C, 1.5 hours "ON", 0.5 hours "OFF"	± (3.0% + 0.05Ω)ΔR
Terminal Strength	5 to 10 second 10 pound pull test, torsion test - 3 alternating directions, 360° each	± (1.0% + 0.05Ω)ΔR
Resistance to Solder Heat	Terminal immersed 3.5 seconds in molten solder at 1/8" to 3/16" from body	± (1.0% + 0.05Ω)ΔR