
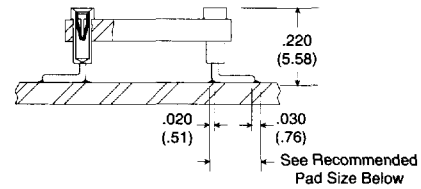
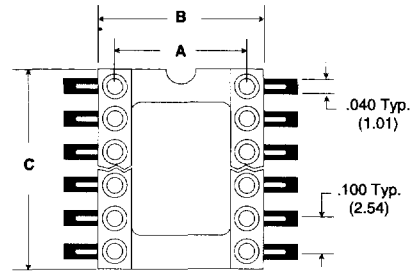


**Surface Mount DIP Sockets**



Dual In-Line

**Features:**

- Sockets surface mount to PCB.
- Available in high temperature thermoplastic.
- Multiple finger contact for reliability.
- Tapered entry for ease of insertion.
- Closed end construction for 100% anti-wicking of solder.


**Body Material:**

**HLS** - High Temp. Glass Filled Thermoplastic, U.L. Rated 94V-O, -60° C to 260°C (-76°F to 500°F)


**Dimensional Information**

# of Pins	A	B	C
8	.300 (7.62)	.400 (10.16)	.400 (10.16)
14	.300 (7.62)	.400 (10.16)	.700 (17.78)
16	.300 (7.62)	.400 (10.16)	.800 (20.32)
18	.300 (7.62)	.400 (10.16)	.900 (22.86)
20	.300 (7.62)	.400 (10.16)	1.000 (25.40)
22	.300 (7.62)	.400 (10.16)	1.100 (27.94)
24	.300 (7.62)	.400 (10.16)	1.200 (30.48)
28	.300 (7.62)	.400 (10.16)	1.400 (35.56)
22	.400 (10.16)	.500 (12.70)	1.100 (27.94)
24	.400 (10.16)	.500 (12.70)	1.200 (30.48)
24	.600 (15.24)	.700 (17.78)	1.200 (30.48)
28	.600 (15.24)	.700 (17.78)	1.400 (35.56)
32	.600 (15.24)	.700 (17.78)	1.600 (40.64)
40	.600 (15.24)	.700 (17.78)	2.000 (50.80)
48	.600 (15.24)	.700 (17.78)	2.400 (60.96)
64	.900 (22.86)	1.000 (25.40)	3.200 (81.28)

**How To Order**

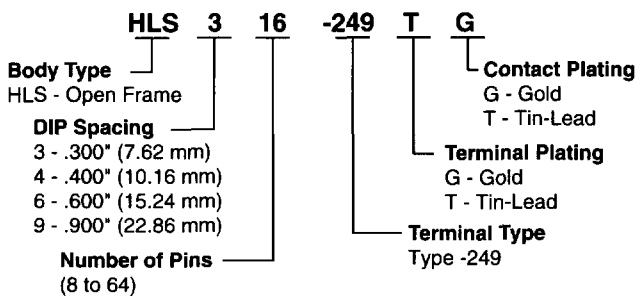

**Terminal Information**



**Recommended Pad Size**  
.145" (3.65mm) x .040" (1.01mm)