

# LH5332P00

CMOS 32M (4M × 8/2M × 16)  
Mask-Programmable ROM

## FEATURES

- 4,194,304 words × 8 bit organization (Byte mode)  
2,097,152 words × 16 bit organization (Word mode)
- Access time: 120 ns (MAX.)
- Power consumption:  
Operating: 440 mW (MAX.)  
Standby: 550 μW (MAX.)
- Static operation
- TTL compatible I/O
- Three-state outputs
- Single +5 V power supply
- Packages:  
44-pin, 600-mil SOP  
48-pin, 12 × 18 mm<sup>2</sup> TSOP (Type I)

## DESCRIPTION

The LH5332P00 is a 32M-bit mask-programmable ROM organized as 4,194,304 × 8 bits (Byte mode) or 2,097,152 × 16 bits (Word mode) that can be selected by a  $\overline{\text{BYTE}}$  input pin. It is fabricated using silicon-gate CMOS process technology.

## PIN CONNECTIONS

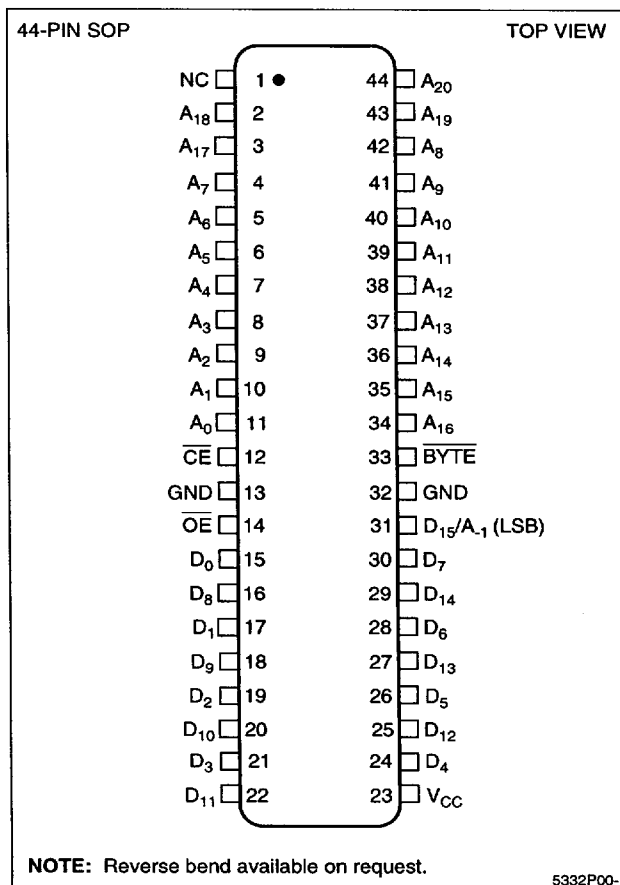


Figure 1. Pin Connections for SOP Package

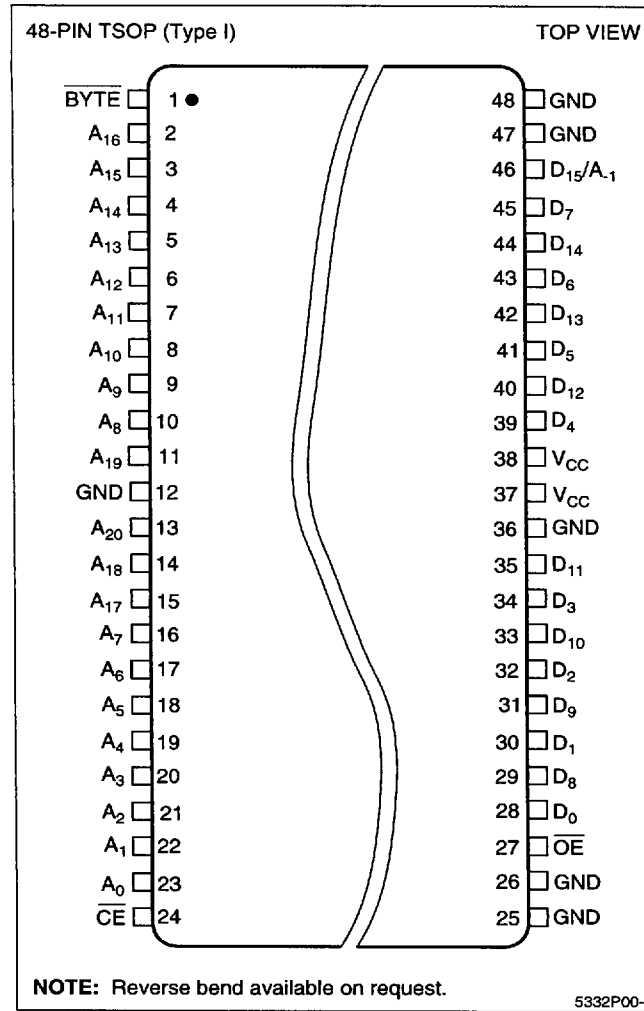


Figure 2. Pin Connections for TSOP Package

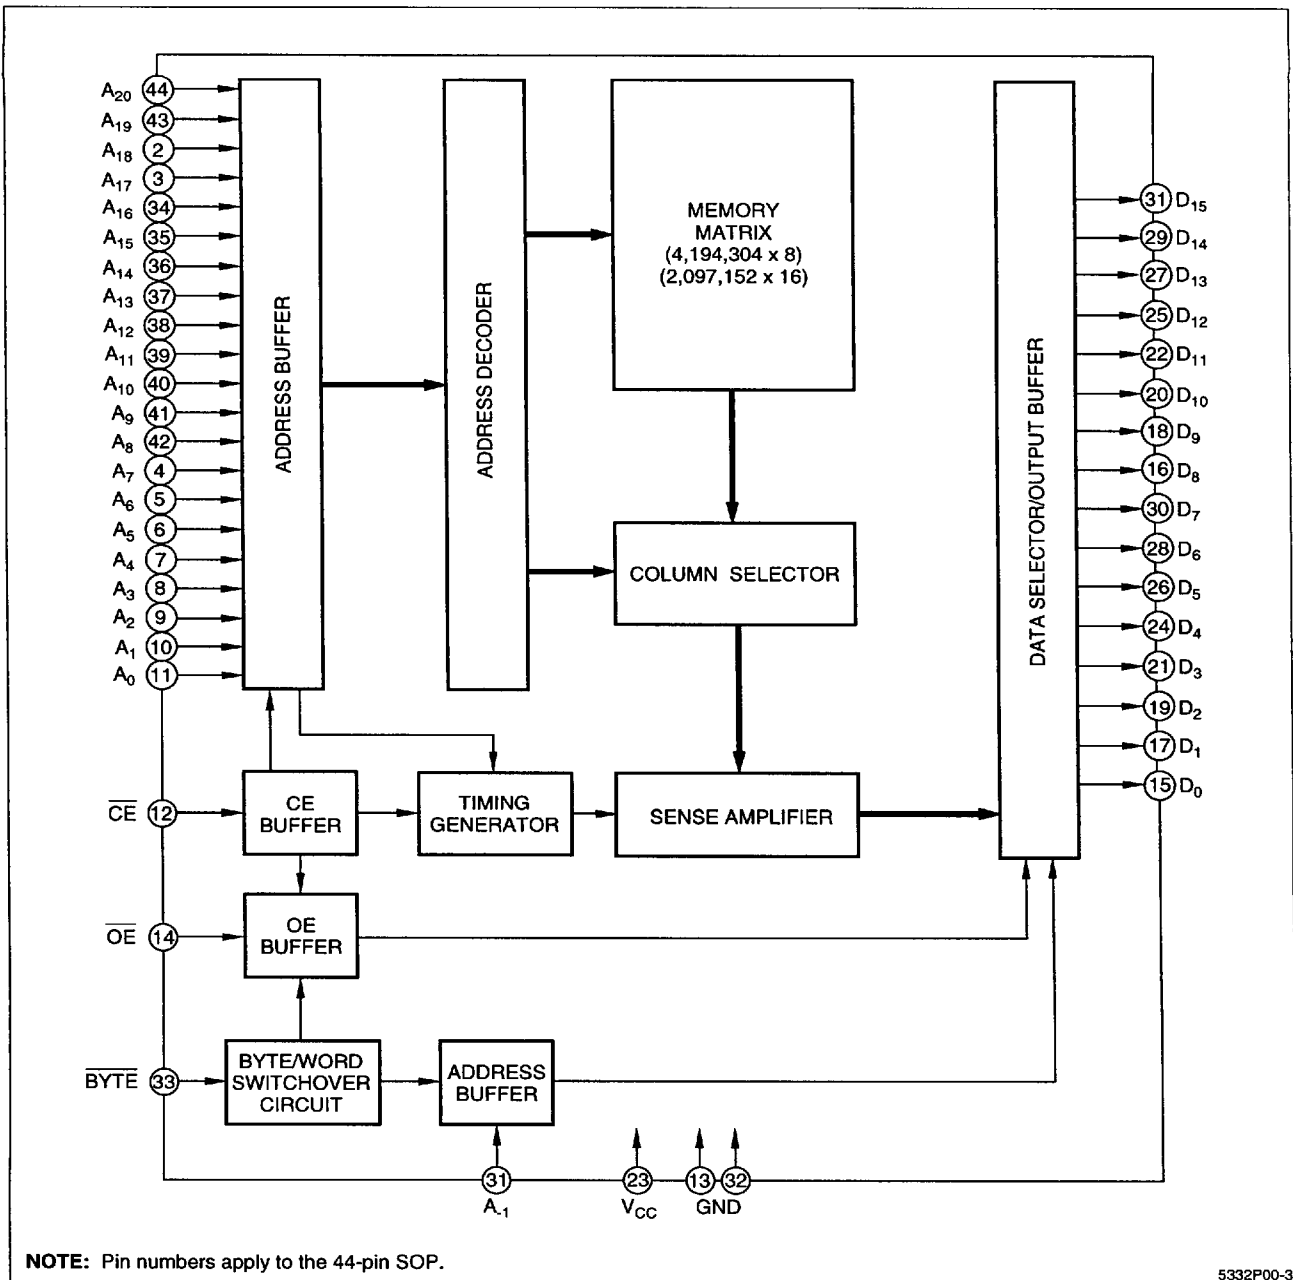


Figure 3. LH5332P00 Block Diagram

**PIN DESCRIPTION**

SIGNAL	PIN NAME	NOTE
A <sub>1</sub> – A <sub>20</sub>	Address input	1
D <sub>0</sub> – D <sub>15</sub>	Data output	1
BYTE	Byte/word mode switch	1
CE	Chip Enable input	

SIGNAL	PIN NAME	NOTE
OE	Output Enable input	
V <sub>CC</sub>	Power supply (+5 V)	
GND	Ground	

**NOTE:**

- The D<sub>15</sub>/A<sub>1</sub> pin becomes LSB address input (A<sub>1</sub>) when the  $\overline{\text{BYTE}}$  pin is set to be LOW in byte mode, and data output (D<sub>15</sub>) when set to be HIGH in word mode.

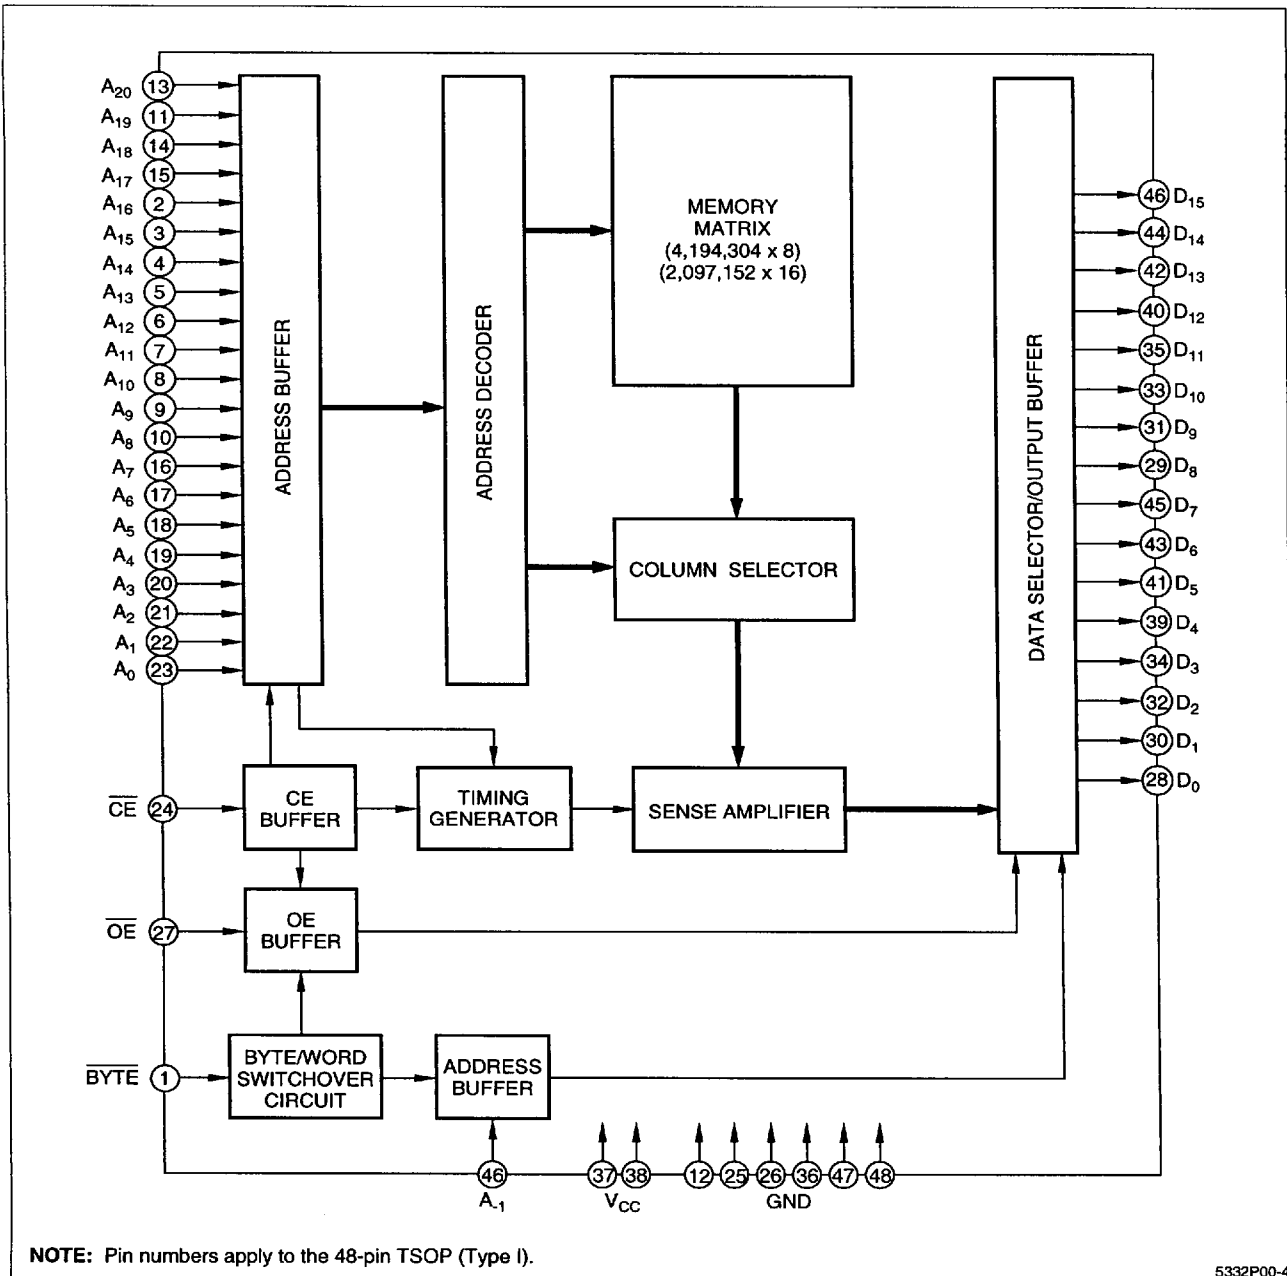


Figure 4. LH5332P00 Block Diagram

## TRUTH TABLE

CE	OE	BYTE	A-1 (D15)	DATA OUTPUT		ADDRESS INPUT		SUPPLY CURRENT
				D <sub>0</sub> - D <sub>7</sub>	D <sub>8</sub> - D <sub>15</sub>	LSB	MSB	
H	X	X	X	High-Z	High-Z	-	-	Standby (I <sub>SB</sub> )
L	H	X	X	High-Z	High-Z	-	-	Operating (I <sub>CC</sub> )
L	L	H	-	D <sub>0</sub> - D <sub>7</sub>	D <sub>8</sub> - D <sub>15</sub>	A <sub>0</sub>	A <sub>20</sub>	Operating (I <sub>CC</sub> )
L	L	L	L	D <sub>0</sub> - D <sub>7</sub>	High-Z	A <sub>-1</sub>	A <sub>20</sub>	Operating (I <sub>CC</sub> )
L	L	L	H	D <sub>8</sub> - D <sub>15</sub>	High-Z	A <sub>-1</sub>	A <sub>20</sub>	Operating (I <sub>CC</sub> )

## NOTE:

X = H or L; High-Z = High-impedance

## ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Supply voltage	V <sub>CC</sub>	-0.3 to +7.0	V
Input voltage	V <sub>IN</sub>	-0.3 to V <sub>CC</sub> + 0.3	V
Output voltage	V <sub>OUT</sub>	-0.3 to V <sub>CC</sub> + 0.3	V
Operating temperature	T <sub>opr</sub>	0 to +70	°C
Storage temperature	T <sub>stg</sub>	-65 to +150	°C

RECOMMENDED OPERATING CONDITIONS (T<sub>A</sub> = 0°C to +70°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply voltage	V <sub>CC</sub>	4.5	5.0	5.5	V

DC CHARACTERISTICS (V<sub>CC</sub> = 5 V ±10%, T<sub>A</sub> = 0°C to +70°C)

PARAMETER	SYMBOL	CONDITIONS	MIN.	MAX.	UNIT	NOTE
Input 'High' voltage	V <sub>IH</sub>		2.2	V <sub>CC</sub> + 0.3	V	
Input 'Low' voltage	V <sub>IL</sub>		-0.3	0.8	V	
Output 'High' voltage	V <sub>OH</sub>	I <sub>OH</sub> = -400 μA	2.4		V	
Output 'Low' voltage	V <sub>OL</sub>	I <sub>OL</sub> = 2.0 mA		0.4	V	
Input leakage current	I <sub>LI</sub>	V <sub>IN</sub> = 0 V to V <sub>CC</sub>		10	μA	
Output leakage current	I <sub>LO</sub>	V <sub>OUT</sub> = 0 V to V <sub>CC</sub>		10	μA	1
Operating current	I <sub>CC1</sub>	t <sub>RC</sub> = 120 ns		80	mA	2
	I <sub>CC2</sub>	t <sub>RC</sub> = 1 μs		65	mA	2
Standby current	I <sub>SB1</sub>	CE = V <sub>IH</sub>		2	mA	
	I <sub>SB2</sub>	CE = V <sub>CC</sub> - 0.2 V		100	μA	
Input capacitance	C <sub>IN</sub>	f = 1 MHz		10	pF	
Output capacitance	C <sub>OUT</sub>	T <sub>A</sub> = 25°C		10	pF	

## NOTES:

1. CE/OE = V<sub>IH</sub>
2. V<sub>IN</sub> = V<sub>IH</sub> or V<sub>IL</sub>, CE = V<sub>IL</sub>, outputs open

**AC CHARACTERISTICS** ( $V_{CC} = 5\text{ V} \pm 10\%$ ,  $T_A = 0^\circ\text{C}$  to  $+70^\circ\text{C}$ )

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	NOTE
Read cycle time	$t_{RC}$	120		ns	
Address access time	$t_{AA}$		120	ns	
Chip enable access time	$t_{ACE}$		120	ns	
Output enable delay time	$t_{OE}$		60	ns	
Output hold time	$t_{OH}$	5		ns	
CE to output in High-Z	$t_{CHZ}$		60	ns	1
OE to output in High-Z	$t_{OHZ}$		60	ns	

**NOTE:**

1. This is the time required for the outputs to become high-impedance.

**AC TEST CONDITIONS**

PARAMETER	RATING
Input voltage amplitude	0.4 V to 2.6 V
Input rise/fall time	10 ns
Input reference level	1.5 V
Output reference level	1.5 V
Output load condition	1TTL + 100 pF

**CAUTION**

To stabilize the power supply, it is recommended that a high-frequency bypass capacitor be connected between the  $V_{CC}$  pin and the GND pin.

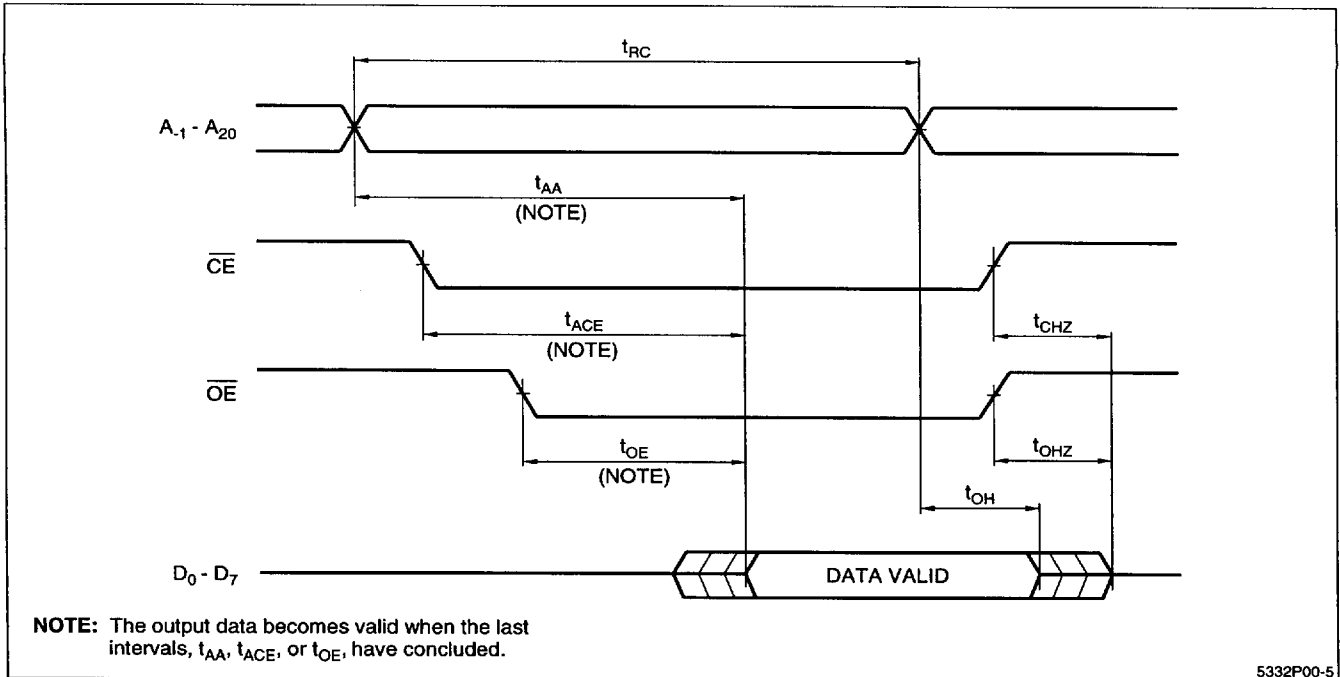


Figure 5. Byte Mode ( $\overline{BYTE} = V_{IL}$ )


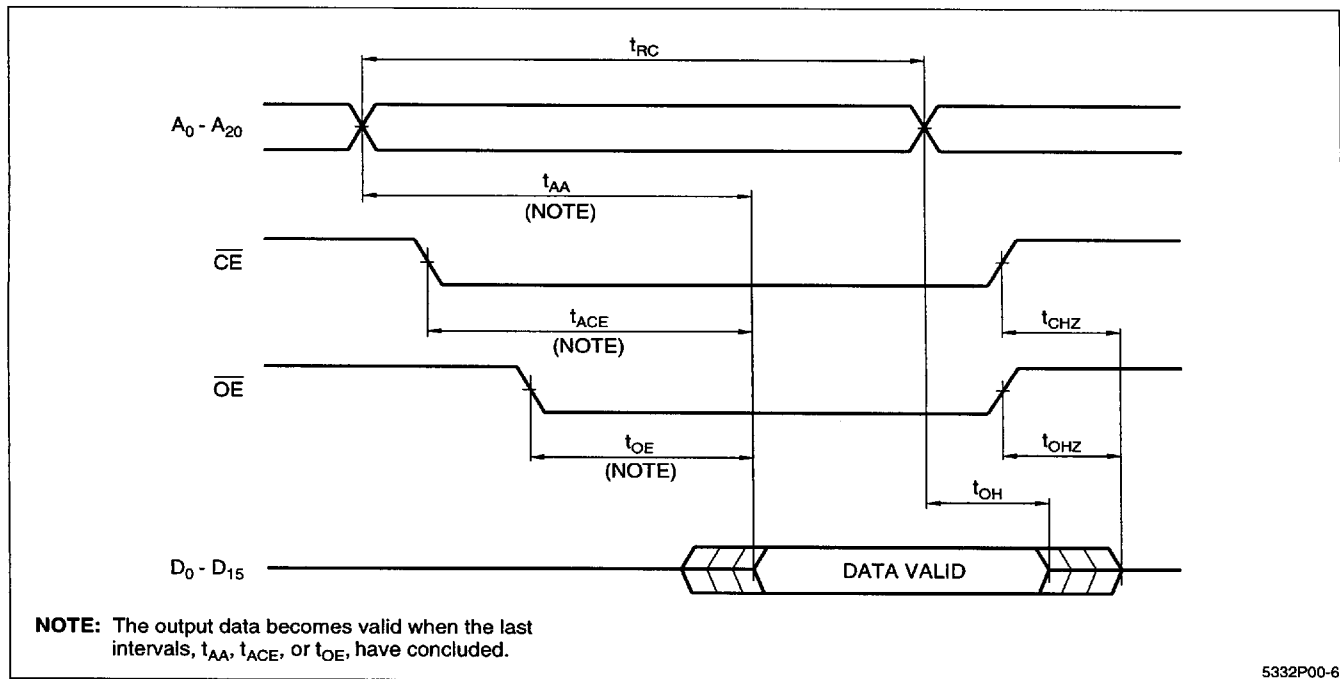


Figure 6. Word Mode ( $\overline{BYTE} = V_{IH}$ )

PACKAGE DIAGRAMS


44SOP (SOP044-P-0600)

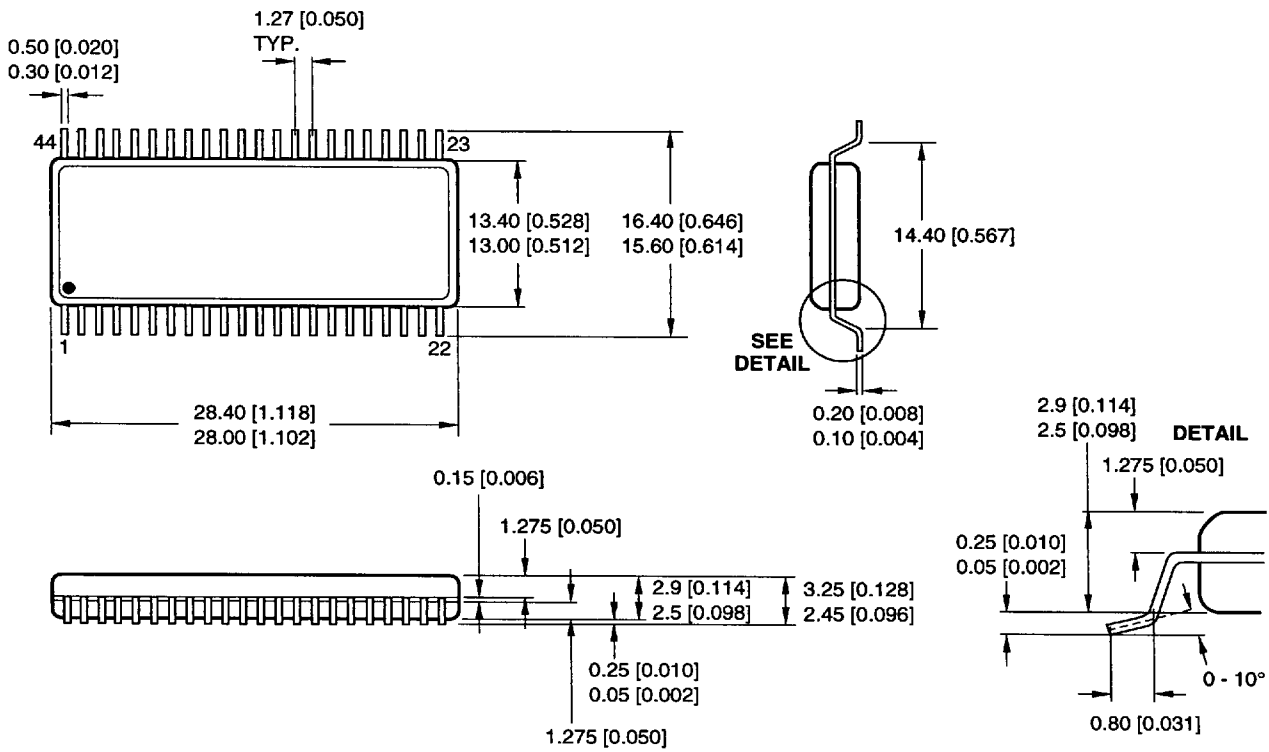

DIMENSIONS IN MM (INCHES) MAXIMUM LIMIT MINIMUM LIMIT

44SOP

44-pin, 600-mil SOP

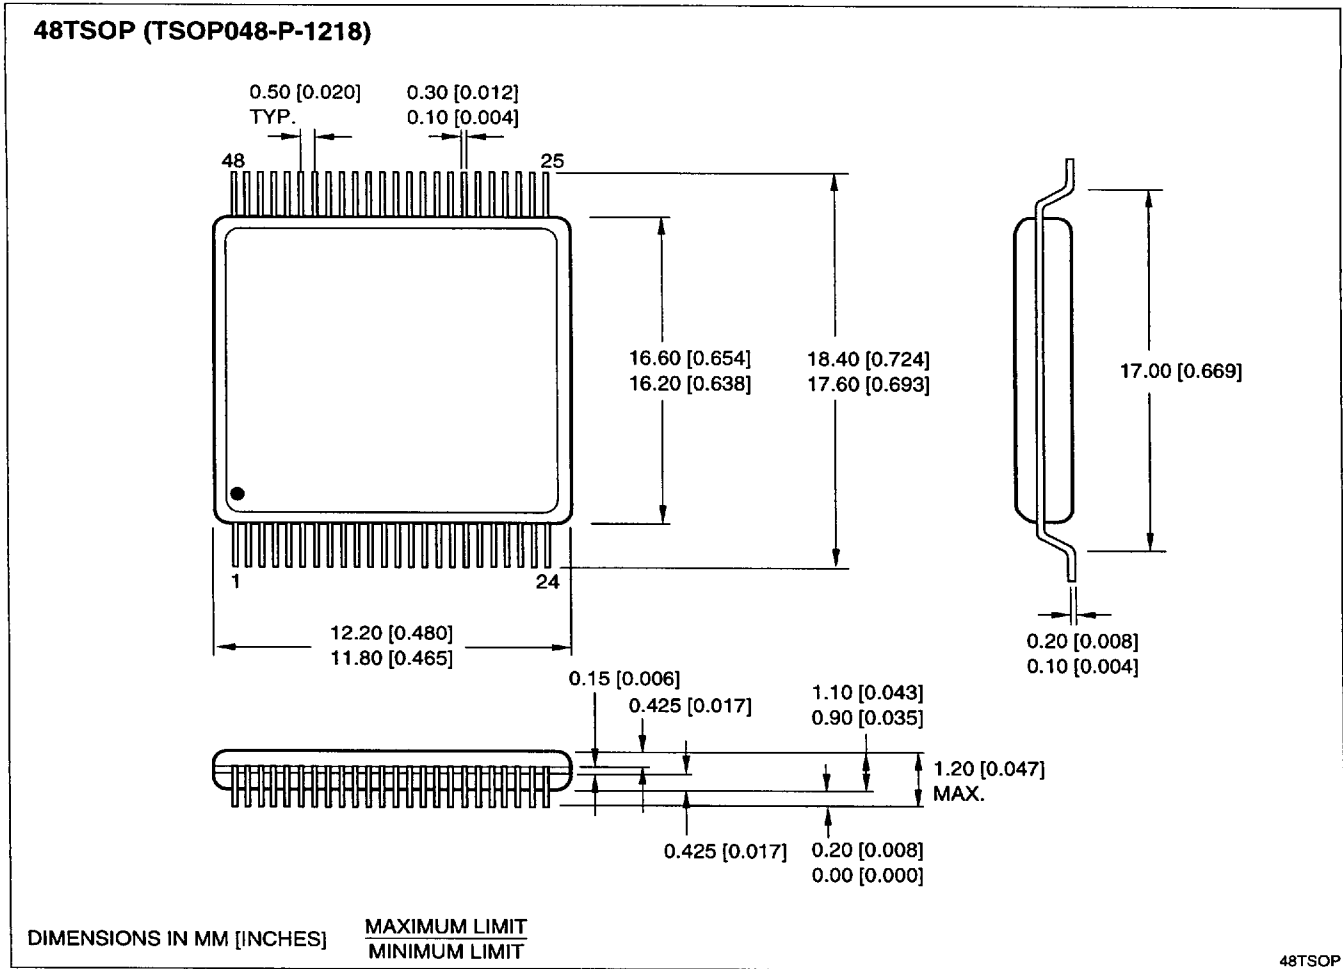

**48-pin, 12 × 18 mm<sup>2</sup> TSOP (Type I)**

**ORDERING INFORMATION**

