


GW Straight Type

Type No. Lighting Color
 LN1261C-(TRS).....Red
 LN1361C-(TRS).....Green
 LN1461C-(TRS).....Amber
 LN1861C-(TRS).....Orange

絶対最大定格 Absolute Maximum Ratings (Ta=25°C)







Lighting Color	P ₀ (mW)	I _r (mA)	I _{FF} (mA)*	V _R (V)	T _{opr} (°C)	T _{stg} (°C)
Red	60	20	60	4	-25~+80	-30~+85
Green	60	20	60	4	-25~+80	-30~+85
Amber	60	20	60	4	-25~+80	-30~+85
Orange	60	20	60	3	-25~+80	-30~+85

*I_{FF}の条件は、duty 10%, Pulse width 1 msec. The condition of I_{FF} is duty 10%, Pulse width 1 msec

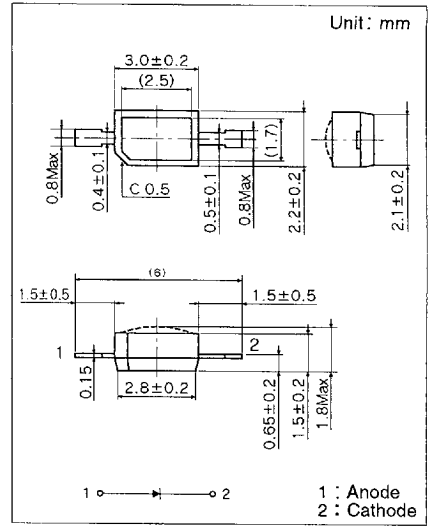

電気的光学的特性 Electro-Optical Characteristics (Ta=25°C)

Type No.	Lighting Color	Lens Color	I _o			V _F		λ _P	Δλ	I _R		
			Typ.	Min.	I _F	Typ.	Max.			I _F	Max.	V _R
LN1261C-(TRS)	Red	Clear	1.4	0.5	15	2.2	2.8	700	100	20	10	4
LN1361C-(TRS)	Green	Clear	7.5	2.8	20	2.2	2.8	565	30	20	10	4
LN1461C-(TRS)	Amber	Clear	4.5	1.6	20	2.2	2.8	590	30	20	10	4
LN1861C-(TRS)	Orange	Clear	5.0	1.9	20	2.1	2.8	630	40	20	10	3
Unit			mod	mcd	mA	V	V	nm	nm	mA	μA	V

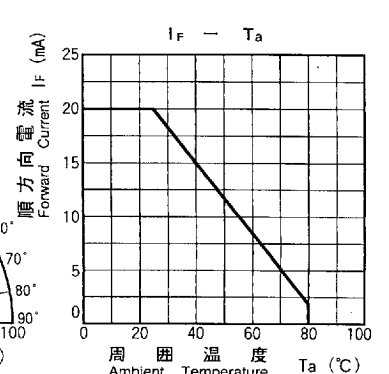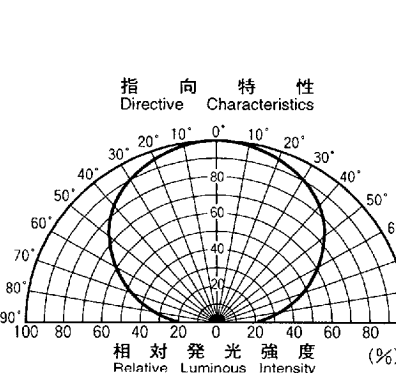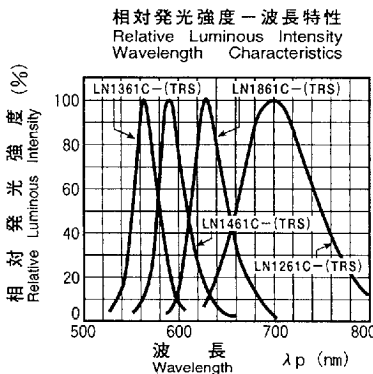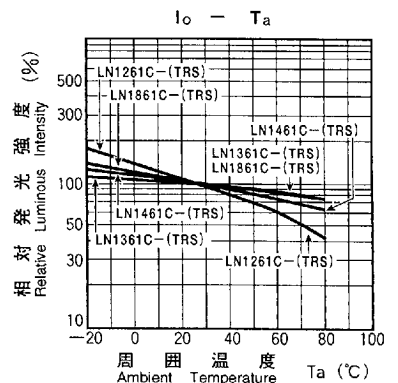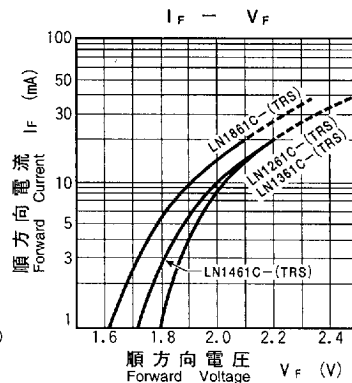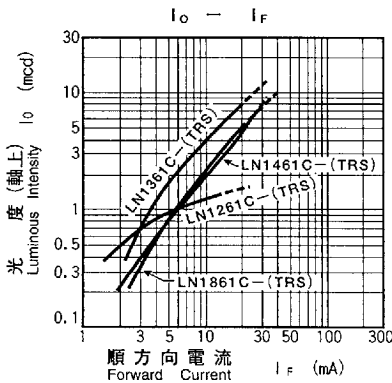

6932852 0014957 501