



4.25mm PITCH 2 PIN BATTERY CONNECTOR SMT TYPE



425122MA Series

Specifications:

- **Insulator Material** : Black High Temp. Plastic
- **Operating Type Range** : -40°C TO +105°C
- **Terminal Material** : Phos. Bronze
- **Platings** : Contact Gold Plated
- **Max. Current Rating** : 7.0A
- **Max. Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V AC For 60 Seconds

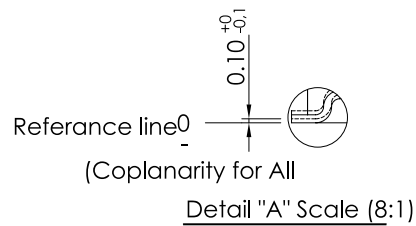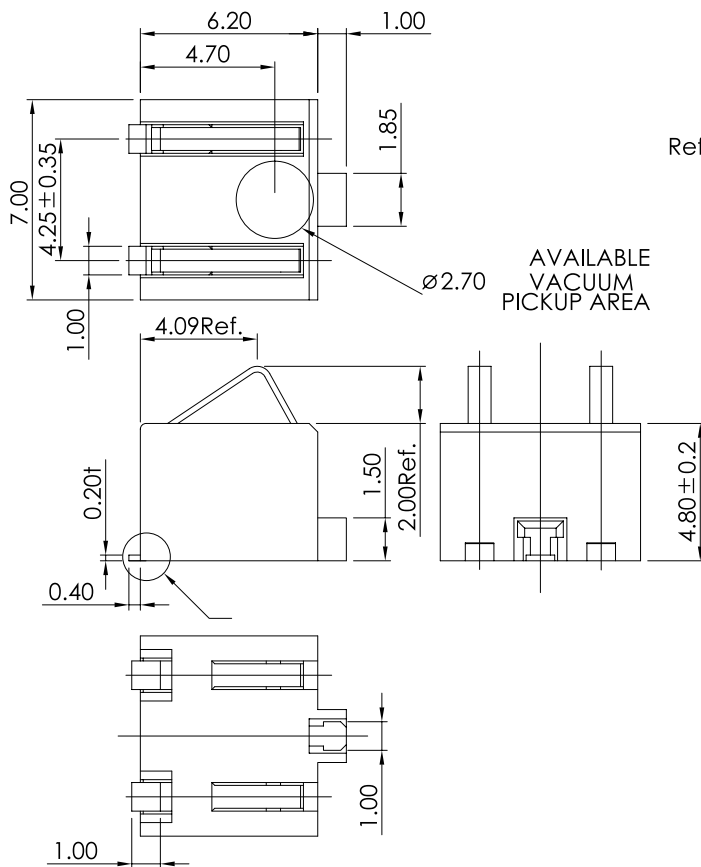

Mobile

BATTERY

Order Information

425122MA002□□00ZU
1 2 3 4 5

1. 'A' : Straight SMT Type
2. No. of pins.
3. Plating
4. Color 'Z' : Black
5. Package

'U' : Tube Package Without Cap

'L' : Reel Package Without Cap

Reference Page 11

Dimensional Information

SUYIN P/NO.

425122MA002□□00ZU
425122MA002□□01ZU
425122MA002□□02ZU

Recommended P.C.B Layout

