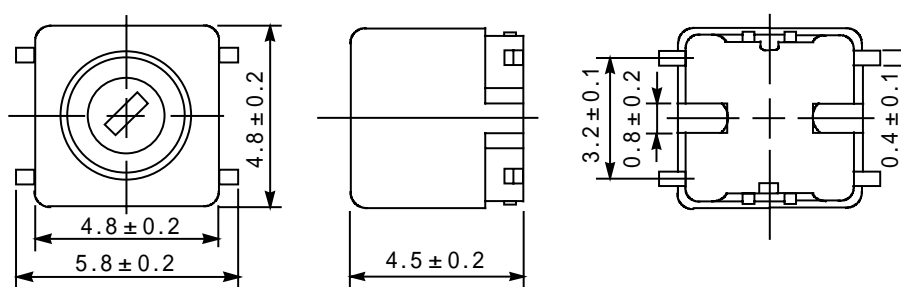


Type: CSR-4
Product Description


- 5.0 × 5.0mm Max.(L × W), 4.7mm Max. Height.
- Inductance: 5 μ H Max.
- Operating frequency:150MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

Feature

- Variable shielded type.
- User terminals are separated from winding terminals to prevent wire breaking effectively.
- RoHS Compliance.

Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.

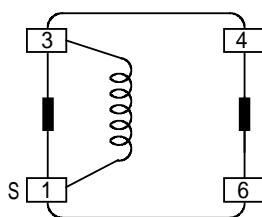Connection (Bottom View)


“ S ” is winding start.

Specification(Part No. S07060243)

| Item | (1 - 3) | Measuring Condition |
|------------|------------------------|---------------------|
| Inductance | 1.5 μ H ± 2 % Variable | 7.96MHz |
| Unloaded Q | 2.0 (Ref.) | 7.96MHz |