

USB 2.0 CONNECTORS

- 4 position single port right angle socket
- PCB Mount
- Contact plating 30 micro inches min


SINGLE PORT PCB-B



SPECIFICATION

| | |
|---|---------------------------|
| Contact Resistance: | 30mΩ Max |
| Insulation Resistance: | 1000MΩ min. @500VDC |
| Rated Voltage and Current: | 1.5A @250VAC min |
| Dielectric withstanding voltage: | 500VAC (rms) for 1 minute |
| Durability: | 1500 mating cycles |
| Insertion Force: | 35 Newtons max |
| Extraction Force: | 10 Newtons min |
| Housing: | PBT UL94V-0 |
| Terminal: | Phosphor Bronze |
| Plating: | 30 micro inches gold |
| Shell: | Brass |

OUTLINE DRAWING

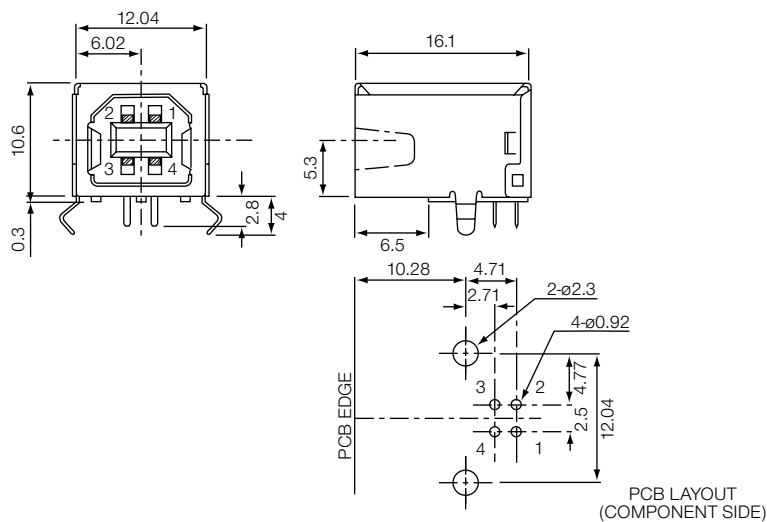

ORDERING INFORMATION

| | | | | | | |
|---------------------|------------|----------|----------|------------------|-------------------|------------------------|
| DBC | USB | 2 | B | SP | W | |
| Dubilier Connectors | USB | Version | Style | Ports | Mounting Option | Colour |
| | | | | SP = Single Port | Blank = PCB Mount | B = Black W = White |