


**Features**

- LOW POWER CONSUMPTION.
- POPULAR T-1 DIAMETER PACKAGE.
- GENERAL PURPOSE LEADS.
- RELIABLE AND RUGGED.
- LONG LIFE - SOLID STATE RELIABILITY.
- AVAILABLE ON TAPE AND REEL.
- 5V INTERNAL RESISTOR.
- RoHS COMPLIANT.

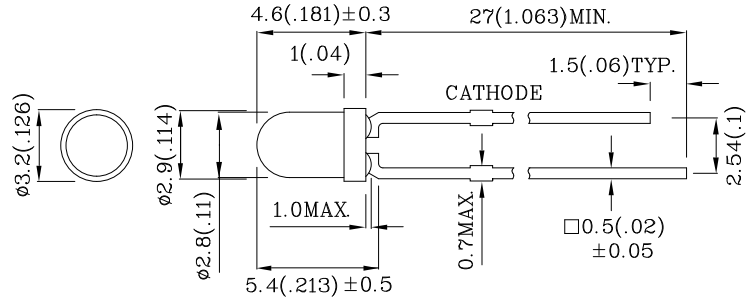


Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.





Absolute Maximum Ratings (TA=25°C)		UR (GaAsP/ GaP)	Unit
Reverse Voltage	V <sub>R</sub>	5	V
Forward Voltage	V <sub>F</sub>	6	V
Power Dissipation	P <sub>T</sub>	85	mW
Operating Temperature	T <sub>A</sub>	-40 ~ +70	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +85	
Lead Solder Temperature [2mm Below Package Base]	260°C For 3 Seconds		
Lead Solder Temperature [5mm Below Package Base]	260°C For 5 Seconds		

Operating Characteristics (TA=25°C)		UR (GaAsP/ GaP)	Unit
Forward Current (Typ.) (V <sub>F</sub> =5V)	I <sub>F</sub>	13	mA
Forward Current (Max.) (V <sub>F</sub> =5V)	I <sub>F</sub>	17.5	mA
Reverse Current (Max.) (V <sub>R</sub> =5V)	I <sub>R</sub>	10	uA
Wavelength of Peak Emission (Typ.) (V <sub>F</sub> =5V)	λ P	627	nm
Wavelength of Dominant Emission (Typ.) (V <sub>F</sub> =5V)	λ D	625	nm
Spectral Line Full Width At Half-Maximum (Typ.) (V <sub>F</sub> =5V)	Δλ	45	nm

Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity (V=5V)		Wavelength nm λ P	Viewing Angle 2 θ 1/2
				min.	typ.		
LUR11D5V	Red	GaAsP/GaP	Red Diffused	8	19	627	40°
Published Date : MAR 17, 2008      Drawing No : SDSA4835      V2      Checked : B.L.LIU      P.1/4							

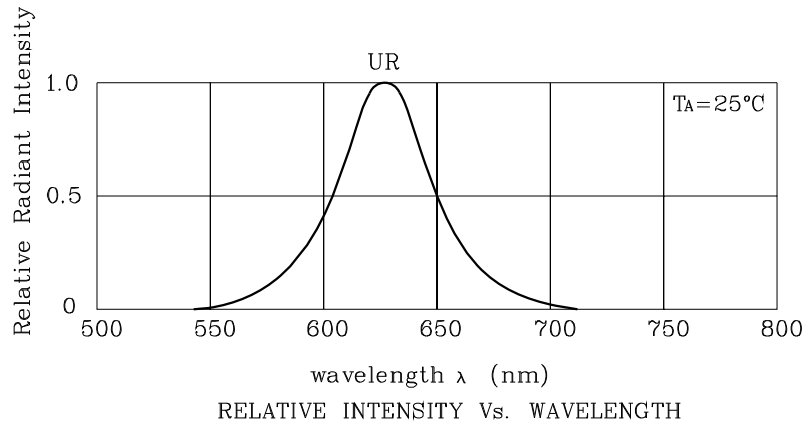

❖ UR

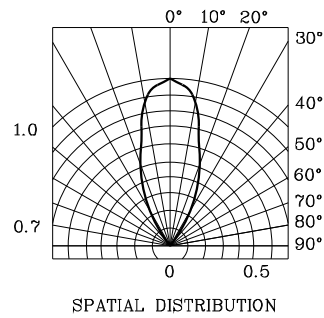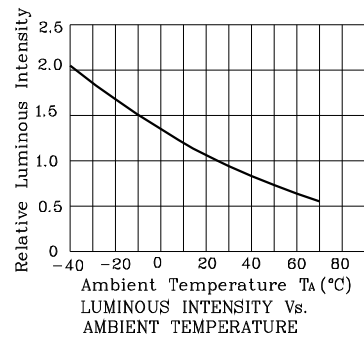

Wave Soldering Profile For Lead-free Through-hole LED.



NOTES:

1. Recommend the wave temperature 245°C~260°C. The maximum soldering temperature should be less than 260°C.
2. Do not apply stress on epoxy resins when temperature is over 85 degree°C.
3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
4. No more than once.

Remarks:



If special sorting is required (e.g. binning based on luminous intensity / luminous flux or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity / Luminous Flux: +/-15%


Note: Accuracy may depend on the sorting parameters.

**PACKING & LABEL SPECIFICATIONS**


**LUR11D5V**

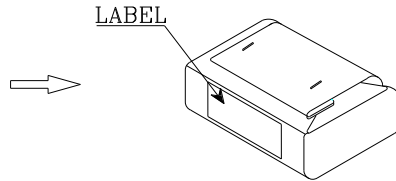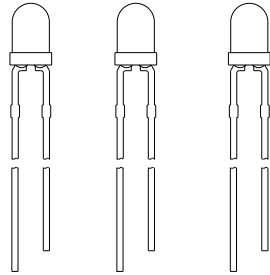


1,000PCS/BAG

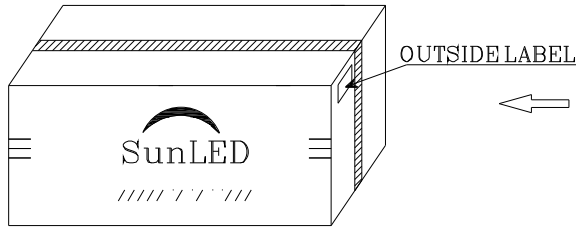


56K / BOX

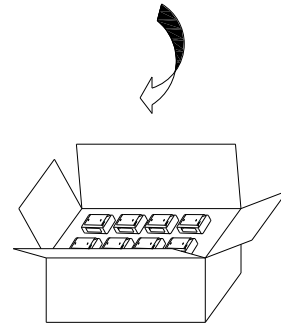

28K/ BOX

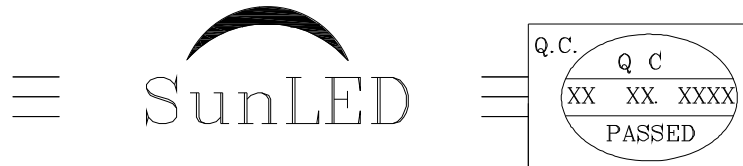

P/NO : Lxx11x	
QTY : 1,000 pcs	CODE: XXX
S/N : XX	
LOT NO:	
 XXXXXXXXXXXXXXXXXXXXXXXX	
RoHS Compliant	