


塑封快恢复高压二极管  
反向电压 3KV  
正向电流 5mA

Plastic Fast Recover High Voltage Rectifier  
Reverse Voltage 3KV  
Forward Current 5mA

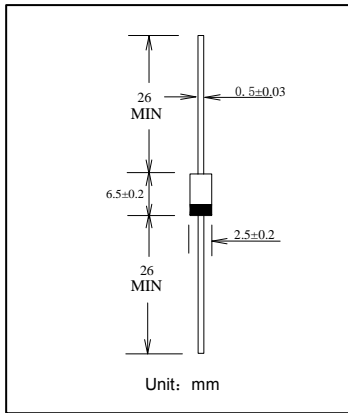

### 特征 Features

- 适用于办公设备的高压整流  
For high voltage rectification for office equipment
- 扩散结  
Diffused-junction
- 具有良好的高温输出特性  
Excellent high temperature output characteristics  
(Small leakage current at high temperature and excellent reverse characteristics)

### 极限值和温度特性 TA = 25℃ 除非另有规定。

### Maximum Ratings & Thermal Characteristics Ratings at 25℃ ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL03	单位 Unit
反向重复峰值电压 Repetitive Peak Reverse Voltage	$V_{RRM}$	3	KV
正向平均电流 Average Forward Current	$I_{F(AV)}$	5 (正弦半波50HZ, 电阻负载Ta=25℃) (50HZ half-sine wave, Resistance load Ta=25℃)	mA
正向(不重复)浪涌电流 Non-Repetitive Forward Surge Current	$I_{FSM}$	0.5 (正弦半波50HZ, 1/2周期, Ta=25℃) (50HZ half-sine wave, 1/2 cycle, Ta = 25℃)	A
工作环境温度 Ambient Temperature	$T_{amb}$	-40 --- +100	℃
最高结温 Maximum Junction Temperature	$T_{(vj)}$	120	℃
贮存温度 Storage Temperature	$T_{stg}$	-40 --- +120	℃

### 电特性 TA = 25℃ 除非另有规定。


### Electrical Characteristics Ratings at 25℃ ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL03	单位 Unit
正向压降 Forward Voltage Drop $I_F = 10mA$	$V_F$	13	V
常温反向漏电流 Normal Temperature Reverse Current $VR = VRRM$	$I_{RM1}$	2	μA
高温反向漏电流 High Temperature Reverse Current $TA = 100℃ VR = VRRM$	$I_{RM2}$	5	μA
反向恢复时间 Reverse Recovery Time $I_F = 2mA, I_{rp} = 4mA$ $1mA$ recovery	$t_{rr}$	100	nS

特性曲线 Characteristic Curves


正向特性曲线

TYPICAL FORWARD CHARACTERISTIC

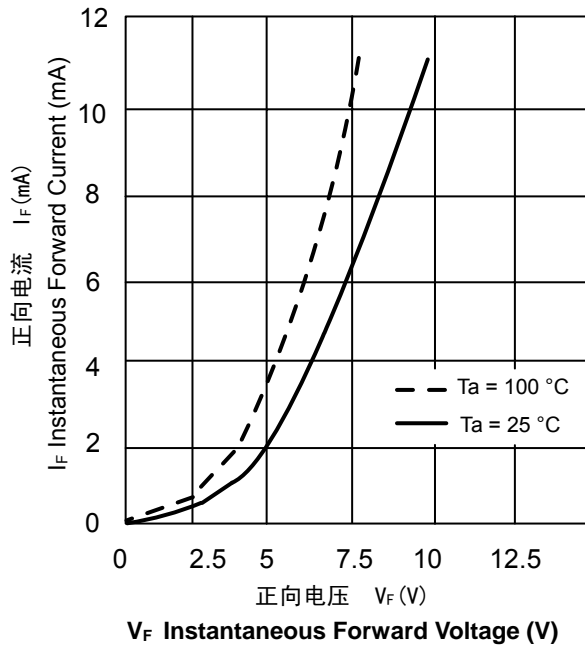


反向特性曲线

REVERSE CHARACTERISTIC [VR-IR]

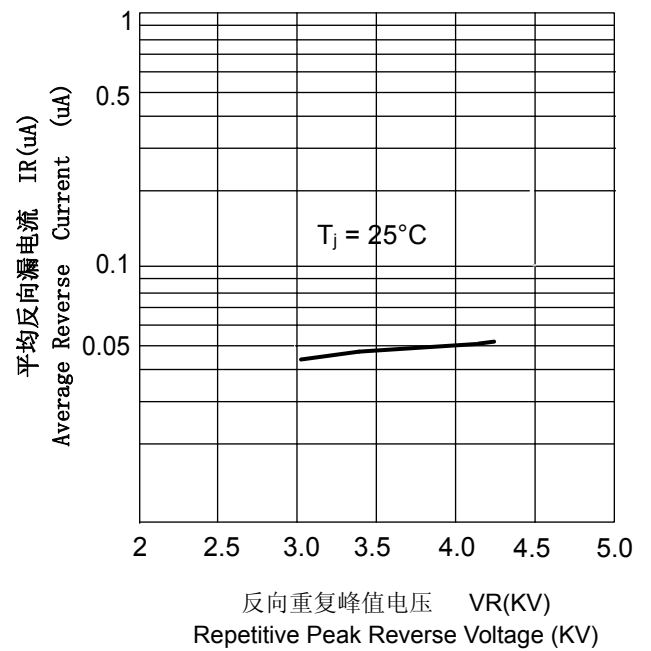

反向恢复时间特性

REVERSE RECOVERY TIME CHARACTERISTIC [Ta-Trr]

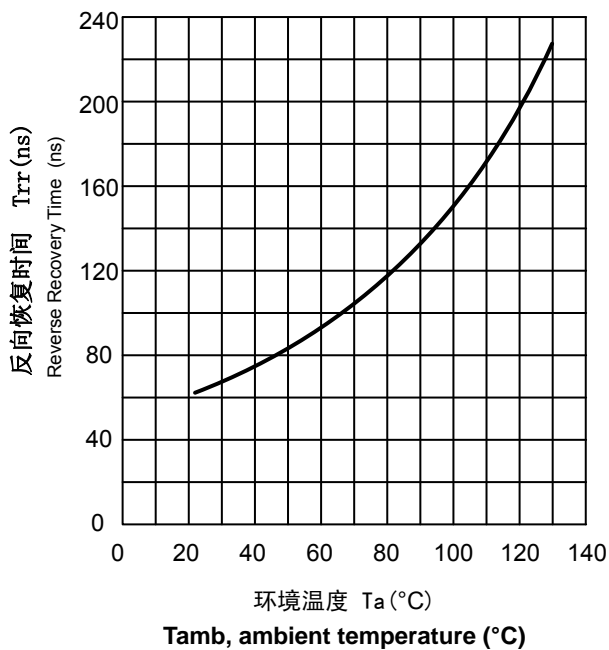

反向电压特性分布

REVERSE VOLTAGE CHARACTERISTIC DISTRIBUTION

