


塑封快恢复高压二极管

反向电压 6KV

正向电流 5mA

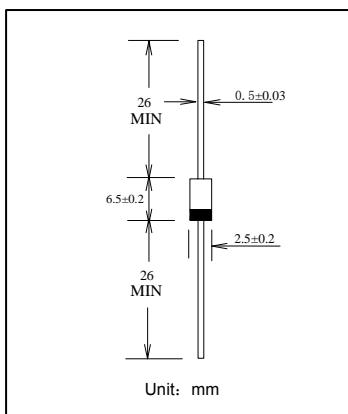

Plastic Fast Recover High Voltage Rectifier

Reverse Voltage 6KV

Forward Current 5mA

特征 Features

- 超小型 Supersmall size
- 高可靠性 High reliability
- 高速开关 High speed switching
- RoHS对应产品 RoHS corresponding products

用途 Purpose

- 适用于办公设备的高压整流 Rectification for office equipments of high voltage
- 其它高压电源整流用 Rectification for Other high voltage power

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL70A	单位 Unit
反向重复峰值电压 Repetitive Peak Reverse Voltage	V _{RRM}	6	KV
正向平均电流 Average Forward Current	I _{F(AV)}	5 (正弦半波50HZ, 电阻负载Ta=25°C) (50HZ half-sine wave,Resistance load Ta=25°C)	mA
正向(不重复)浪涌电流 Non-Repetitive Forward Surge Current	I _{FSM}	0.5 (正弦半波50HZ, 1/2周期, Ta=25°C) (50HZ half-sine wave,1/2 cycle, Ta = 25 °C)	A
工作环境温度 Ambient Temperature	T _{tamb}	-40 --- +100	°C
最高结温 Maximum Junction Temperature	T _(vJ)	120	°C
贮存温度 Storage Temperature	T _{stg}	-40 --- +120	°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

参数名称 Item	符号 Symbol	2CL70A	单位 Unit
正向压降 Forward Voltage Drop	I _F =10mA	V _F	V
常温反向漏电流 Normal Temperature Reverse Current	VR=VRRM	I _{RM1}	μA
高温反向漏电流 High Temperature Reverse Current	TA=100°C VR=VRRM	I _{RM2}	μA
反向恢复时间 Reverse Recovery Time	I _F =2mA,I _{rp} =4mA 1mA recovery	trr	nS

特性曲线 Characteristic Curves

