


PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

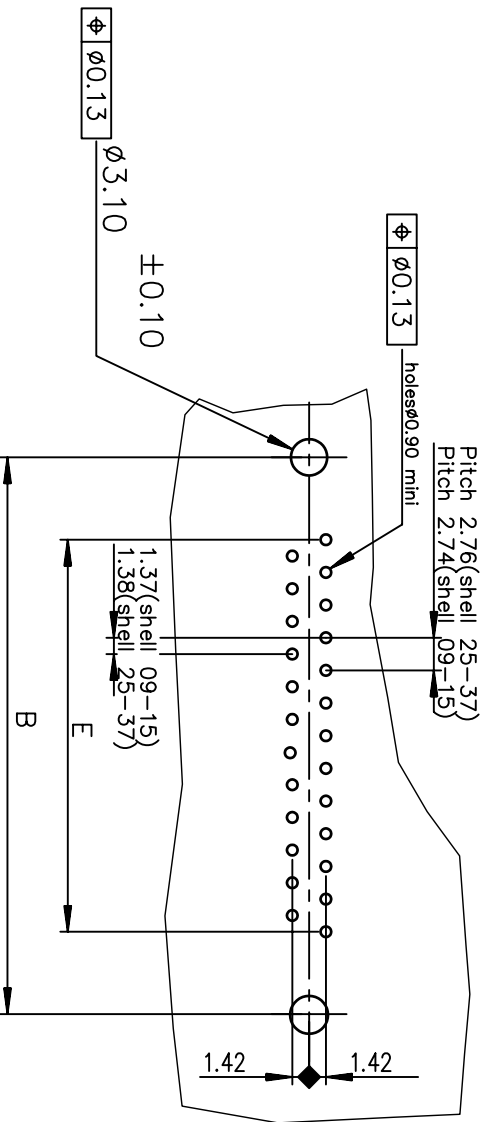

rev	ecn no	dr	date
C	-	JOU	1996/09/09
D	LS05-001	MPE	2005/03/09
E	LS05-0056	MPE	2005/06/27
F	LS06-0097	LGO	2006/07/29
G	I09-0268	NG	2009-11-24
H	I10-0059	NG	2010-02-23

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
Dr JOUBERT		ANGULAR	✓	0.X	±0.1	⊕	Scale
Eng PESSON		LINEAR		0.XX	±0.1		2
Chr NIRMAL GEORGE		0.XX ± 2		0.XXX	±0.1		ECN 110-0059
Appr SUDHIR VARMA		Product family					D-SUB Spec ref -
MALE CONNECTOR DELTA D S		TOLERANCES UNLESS OTHERWISE SPECIFIED		European Views			
straight solder type for							
catalog no							
C01-8646-0099							
CUSTOMER						sheet 1 of 1	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

Protection: 4 --> flash AU
6 --> 0.76µ AU

Protection: 4 --> flash AU
6 --> 0.76µ AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A*GL00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A*GL00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A*GL00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A*GL00LF

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A*GL00
15	39.14	33.32	25.18	25.12	19.18	D15P24A*GL00
25	53.03	47.04	39.12	38.84	33.12	D25P24A*GL00
37	69.32	63.50	55.68	55.30	49.68	D37P24A*GL00