

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.GX00
15	39.14	33.32	25.18	24.54	19.18	D15S24A.GX00
25	53.03	47.04	39.12	38.25	33.12	D25S24A.GX00
37	69.32	63.50	55.68	54.71	49.68	D37S24A.GX00


Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S24A.GX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S24A.GX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S24A.GX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S24A.GX00LF

Plating: 4 --> flash AU
Plating: 6 --> 0.76µ AU

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

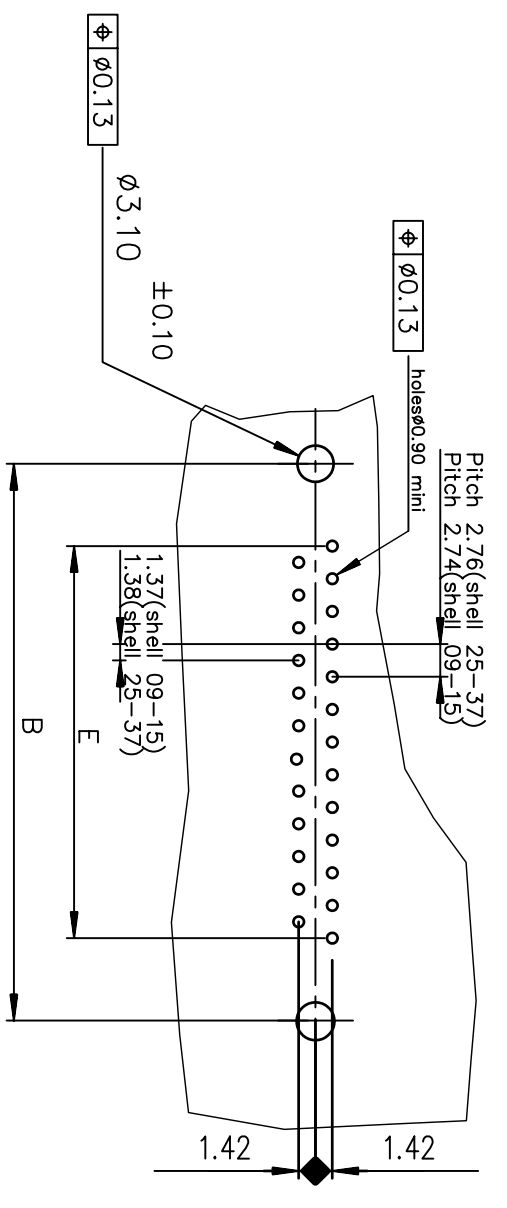

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

www.fciconnect.com

Dr	JOURBERT	1996/09/10	ANGULAR	tolerance std	projection	European Views
Eng	PESSON	1996/09/10	LINEAR	ISO 1302	ISO 406 ISO 1101	mm
Chr	NIRMAL GEORGE	2010-02-23	0.xx' ±.2	TOLERANCES UNLESS OTHERWISE SPECIFIED		
Appr	SUDHIR VARMA	2010-02-23	0.xxx	Product family		
				D-SUB		Spec ref -



FEMALE CONNECTOR STD EURO
straight solder type for

C01-8646-0495
CUSTOMER sheet 1 of 1



Copyright FCI.

REV F - 2006-04-17