

# KR Electronics

## General Description


KR 2778+ is a 78.75 MHz bandpass filter. The filter has a minimum of 3 dB bandwidth of 18 MHz. Other passband frequencies are available. Please consult the factory.

## Features


- Sharp Transition to Stopband
- > 60 dB Stopband
- 50 Ω Source and Load

## Typical Performance

**Passband Amplitude & Group Delay**  
(1 dB/div and 20 nsec/div)

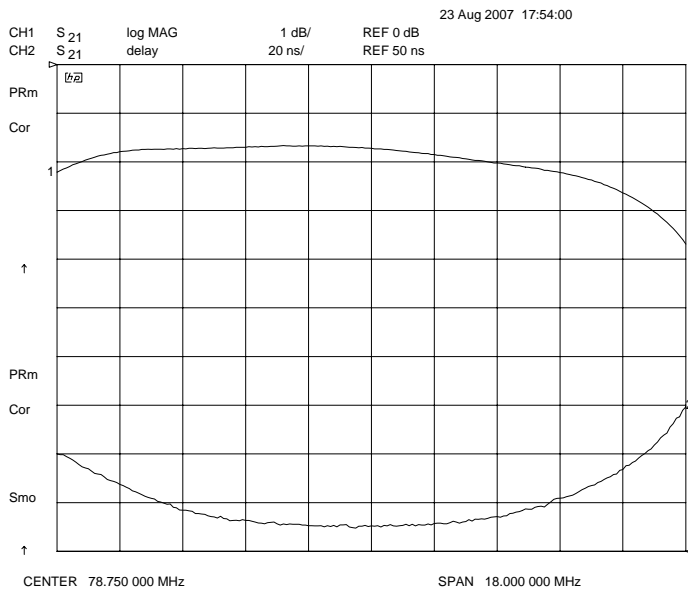

**Overall Response**  
(10 dB/div)

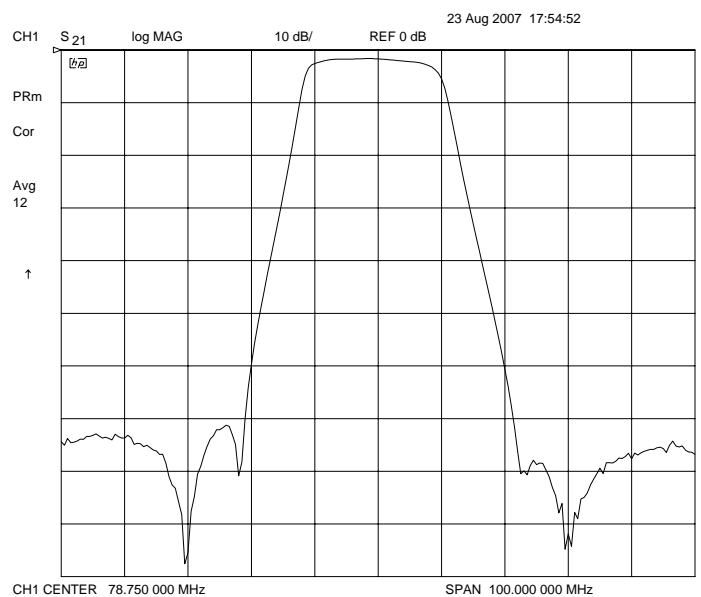

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2778+

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	78.75 MHz
Insertion Loss	< 3 dB (< 2 dB typical)
Attenuation at 57.75 MHz	> 60 dB
Attenuation at 69.75 MHz	< 3 dB
Attenuation at 87.75 MHz	< 3 dB
Attenuation at 99.75 MHz	> 60 dB
Source and Load	50 Ω

## Physical Dimensions

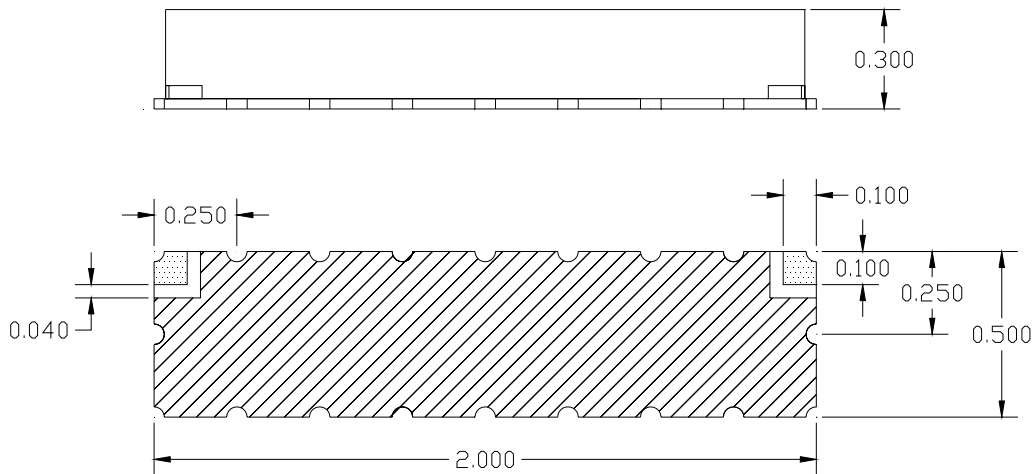

### Notes:

1. Surface mount package — Metal cover open frame
2. Dimensions in inches
3. Maximum reflow temperature is 230° C for 10 sec maximum.
4. If boards are cleaned after installation, units must be completely dried.